
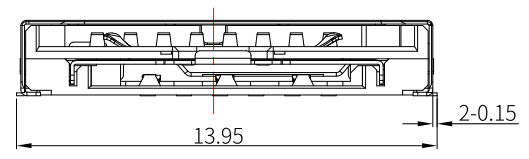


- NOTES:
- ELECTRICAL CHARACTERISTICS
 - CONTACT RESISTANCE: 60 Milliohms Max
 - INSULATION RESISTANCE: 1,000 Megohms Min
 - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE
 - MECHANICAL CHARACTERISTICS
 - OPERATION TEMPERATURE RANGE: -25°C ~ +70°C
 - DURABILITY: 3,000 CYCLES
 - MATERIAL:
 - HOUSING: THERMOPLASTIC, UL 94-V0
 - TERMINAL: PHOSPHOR BRONZE
 - SHELL: STAINLESS STEEL
 - FINISHED:
 - TERMINAL: Ni PLATED UNDER, Au PLATED ON CONTACT AREA, G/F PLATED ON SOLDER TAIL
 - SHELL: Ni PLATED UNDER, G/F PLATED ON SOLDER TAIL

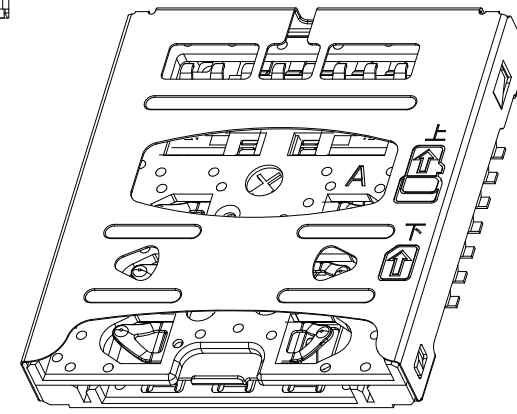

T-CARD	P/N	Description
T1		DAT2
T2		CD/DAT3
T3		CMD
T4		VDD
T5		CLK
T6		VSS)
T7		DAT0
T8		DAT1

NANO SIM	P/N	Description
P1	A/B	VCC
P2	A/B	RST
P3	A/B	CLK
P5	A/B	GND
P6	A/B	VPP
P7	A/B	I/O

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 2.5H 3 CHOOSE 2 双层卡座 (DUAL NANO OR NANO+T-CARD) FOR CUSTOMER	
			PAR	MCS-304
DECIMALS: XX:±0.30			DWN	KING
X:±0.25			CHKD	2012.03.08
X:±0.20		APVD		
ANGLES: X:±2°		SCALE 1:1	UNIT: mm	
X:±1°		CUSTOMER COPY	SIZE:A4	
			SHEET:1F1	REV:A

