
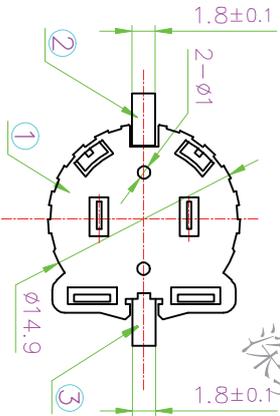


Main specification:
 1. Contact resistance: 30mΩ min.
 2. Insulation resistance: 1000MΩ max.
 3. Withstand voltage: 500V AC for 1 minute.



POB Holes Diagram
Top View

Tolerance: Unless otherwise specified

≤1.5	±0.1	1.5~10:	±0.2	>10:	±0.3
3	TERMINAL-2	QSn6.5-0.2		Au-Plated	
2	TERMINAL-1	QSn6.5-0.2		Au-Plated	
1	HOUSING	PPS		BLACK	
NO.	PART NAME	MATERIAL		COLOR/FINISHED	

日期 DATE	单位 UNITS	审核 CHECK	BATTERY HDLDER
2010/2/14	mm	QJ.LIU	

比例 SCALE	制图 DRAW	设计 DESIGN	QJ1220-2SMT
1/1	QJ.QILIU	QJ.HUAN	

深圳市琦捷电子有限公司
 SHENZHEN Q&J ELECTRONICS CO., LTD