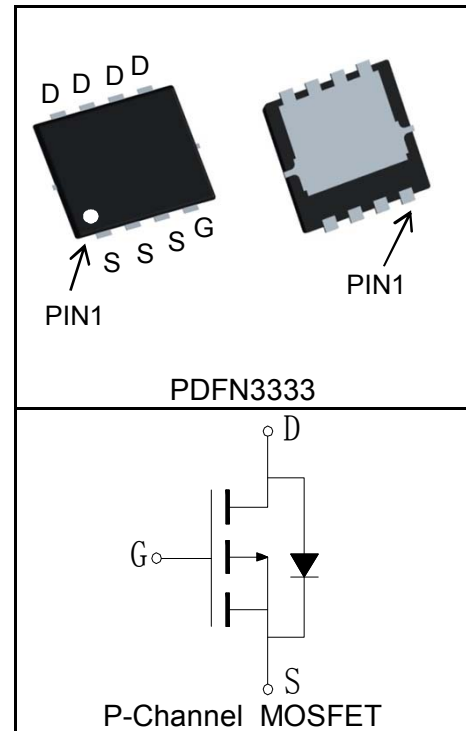


**Features**

- -20V/-15A,  
 $R_{DS(ON)} = 16m\Omega(Typ.)@V_{GS}=-4.5V$   
 $R_{DS(ON)} = 28m\Omega(Typ.)@V_{GS}=-2.5V$
- Super High Dense Cell Design
- Reliable and Rugged
- 100% Avalanche Tested
- Lead Free and Green Devices Available (RoHS Compliant)

**Applications**

- Load Switch
- Power Management
- Battery Protection

**Pin Description**

**Absolute Maximum Ratings**

Symbol	Parameter	Rating	Unit	
<b>Common Ratings</b> ( $T_C=25^\circ C$ Unless Otherwise Noted)				
$V_{DSS}$	Drain-Source Voltage	-20	V	
$V_{GSS}$	Gate-Source Voltage	$\pm 10$		
$T_J$	Maximum Junction Temperature	150	$^\circ C$	
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ C$	
$I_S$	Diode Continuous Forward Current	$T_C=25^\circ C$	-1	A
<b>Mounted on Large Heat Sink</b>				
$I_{DP}^{①}$	300 $\mu s$ Pulse Drain Current Tested	$T_C=25^\circ C$	-60	A
$I_D^{②}$	Continuous Drain Current@ $T_C(V_{GS}=-4.5V)$	$T_C=25^\circ C$	-15	A
		$T_C=100^\circ C$	-9.4	
	Continuous Drain Current@ $T_A(V_{GS}=-4.5V)^{③}$	$T_A=25^\circ C$	-9.3	
		$T_A=70^\circ C$	-7.5	
$P_D$	Maximum Power Dissipation@ $T_C$	$T_C=25^\circ C$	31	W
		$T_C=100^\circ C$	12.5	
	Maximum Power Dissipation@ $T_A^{③}$	$T_A=25^\circ C$	3.5	
		$T_A=70^\circ C$	2.3	

Symbol	Parameter	Rating	Unit
$R_{\theta JC}$	Thermal Resistance-Junction to Case	4	°C/W
$R_{\theta JA}^{(3)}$	Thermal Resistance-Junction to Ambient	35	°C/W
<b>Drain-Source Avalanche Ratings</b>			
$E_{AS}^{(4)}$	Avalanche Energy, Single Pulsed	20	mJ

**Electrical Characteristics** ( $T_C=25^\circ\text{C}$  Unless Otherwise Noted)






Symbol	Parameter	Test Condition	RU20P17M2			Unit
			Min.	Typ.	Max.	
<b>Static Characteristics</b>						
$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_{DS}=-250\mu A$	-20			V
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=-20V, V_{GS}=0V$			-1	$\mu A$
		$T_J=125^\circ C$			-30	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_{DS}=-250\mu A$	-0.4		-1.1	V
$I_{GSS}$	Gate Leakage Current	$V_{GS}=\pm 10V, V_{DS}=0V$			$\pm 100$	nA
$R_{DS(ON)}^{(5)}$	Drain-Source On-state Resistance	$V_{GS}=-4.5V, I_{DS}=-8A$		16	20	$m\Omega$
		$V_{GS}=-2.5V, I_{DS}=-6A$		28	35	$m\Omega$
<b>Diode Characteristics</b>						
$V_{SD}^{(5)}$	Diode Forward Voltage	$I_{SD}=-8A, V_{GS}=0V$			-1.4	V
$t_{rr}$	Reverse Recovery Time	$I_{SD}=-15A, di_{SD}/dt=100A/\mu s$		17		ns
$Q_{rr}$	Reverse Recovery Charge			23		nC
<b>Dynamic Characteristics</b> <sup>(6)</sup>						
$R_G$	Gate Resistance	$V_{GS}=0V, V_{DS}=0V, F=1MHz$		0.9		$\Omega$
$C_{iss}$	Input Capacitance	$V_{GS}=0V,$ $V_{DS}=-10V,$ Frequency=1.0MHz		640		pF
$C_{oss}$	Output Capacitance			135		
$C_{rss}$	Reverse Transfer Capacitance			65		
$t_{d(ON)}$	Turn-on Delay Time	$V_{DD}=-10V, I_{DS}=-15A,$ $V_{GEN}=-4.5V, R_G=6\Omega$		9		ns
$t_r$	Turn-on Rise Time			16		
$t_{d(OFF)}$	Turn-off Delay Time			45		
$t_f$	Turn-off Fall Time			21		
<b>Gate Charge Characteristics</b> <sup>(6)</sup>						
$Q_g$	Total Gate Charge	$V_{DS}=-16V, V_{GS}=-10V,$ $I_{DS}=-15A$		10		nC
$Q_{gs}$	Gate-Source Charge			2		
$Q_{gd}$	Gate-Drain Charge			3		

- Notes:
- ① Pulse width limited by safe operating area.
  - ② Calculated continuous current based on maximum allowable junction temperature.
  - ③ When mounted on 1 inch square copper board,  $t \leq 10\text{sec}$ .
  - ④ Limited by  $T_{Jmax}$ ,  $I_{AS} = -9\text{A}$ ,  $V_{DD} = -16\text{V}$ ,  $R_G = 50\Omega$ , Starting  $T_J = 25^\circ\text{C}$ .
  - ⑤ Pulse test; Pulse width  $\leq 300\mu\text{s}$ , duty cycle  $\leq 2\%$ .
  - ⑥ Guaranteed by design, not subject to production testing.







## Ordering and Marking Information

Device	Marking	Package	Packaging	Quantity	Reel Size	Tape width
RU20P17M2	20P17	PDFN3333	Tape&Reel	5000	13"	12mm



**Typical Characteristics**

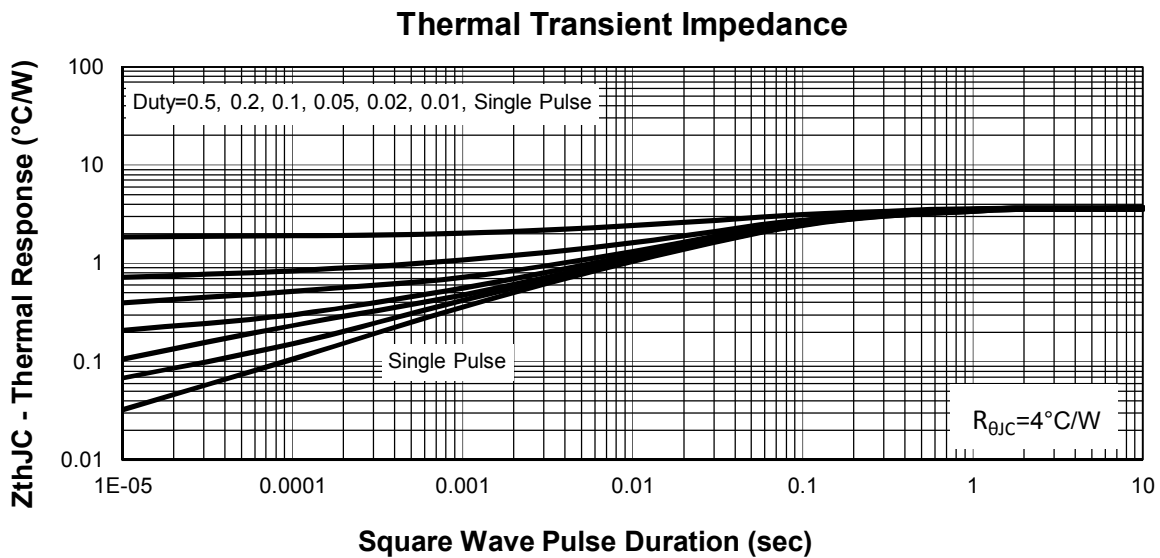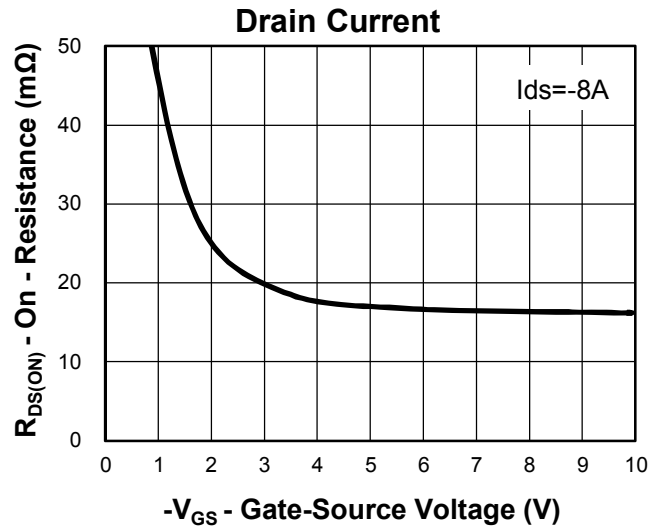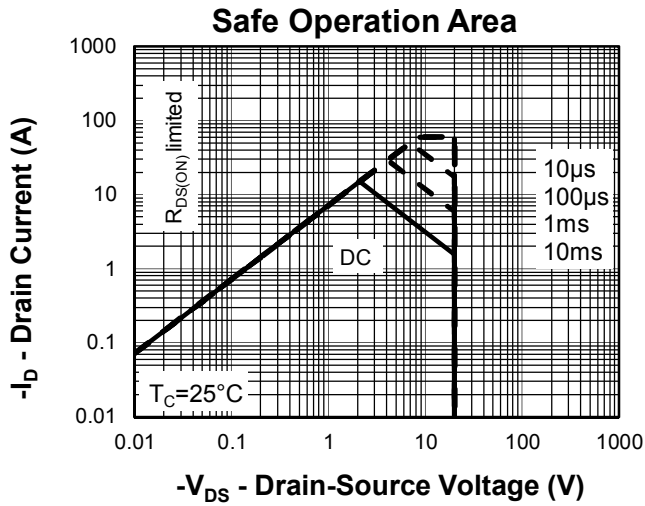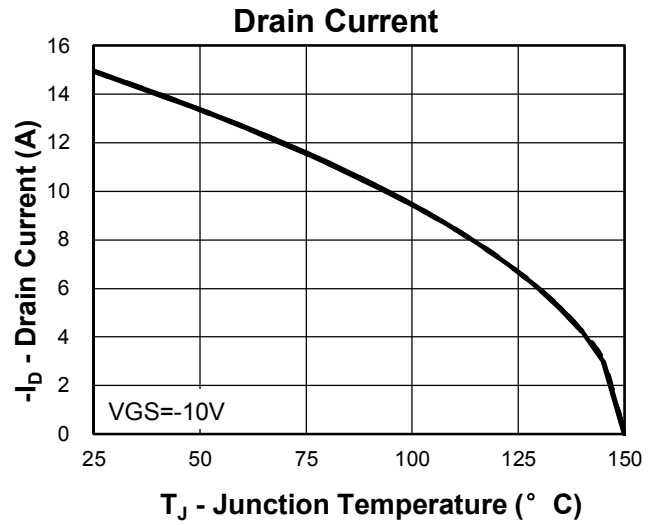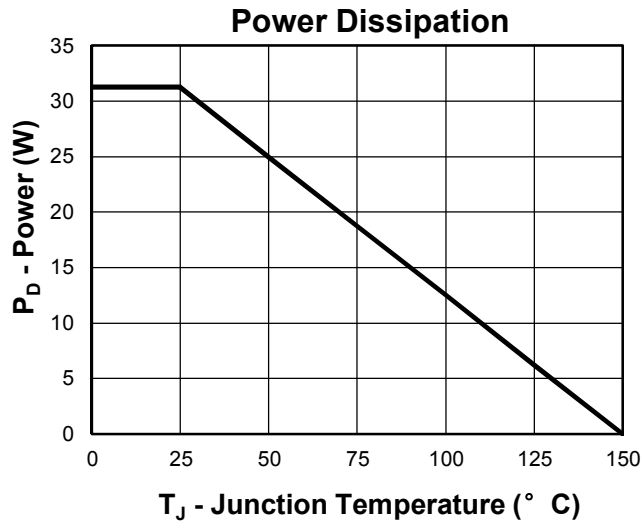



**Typical Characteristics**

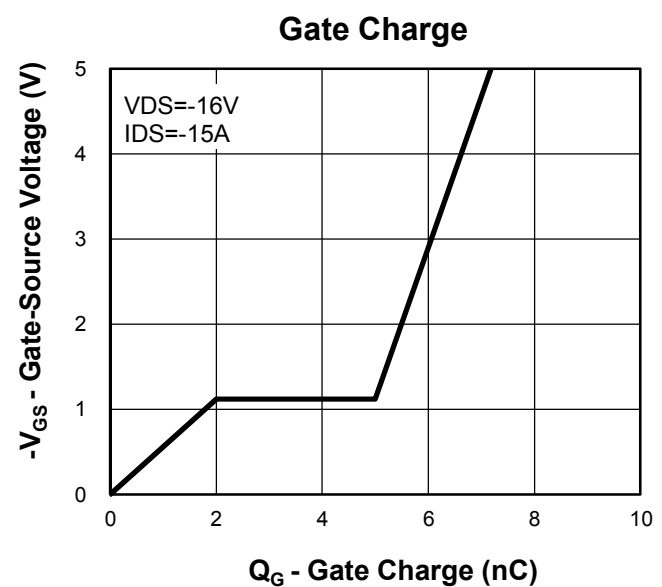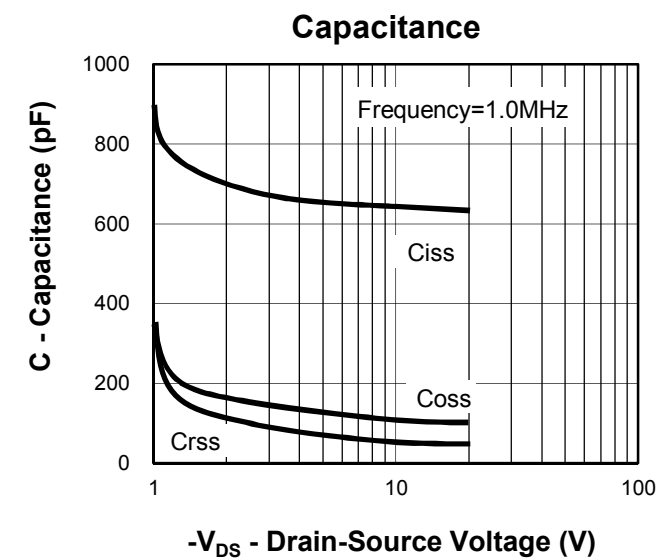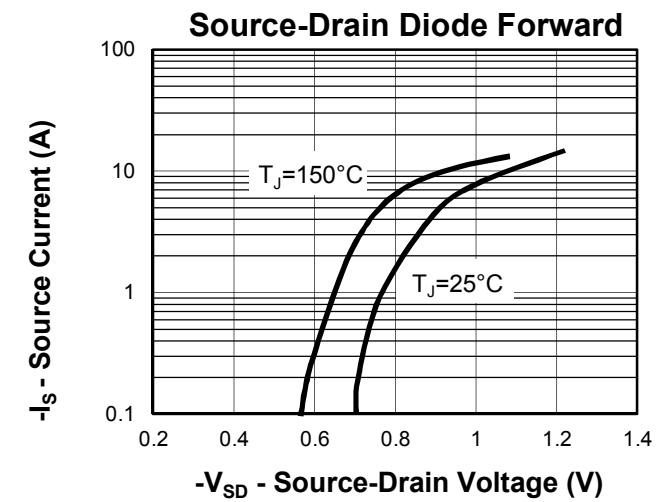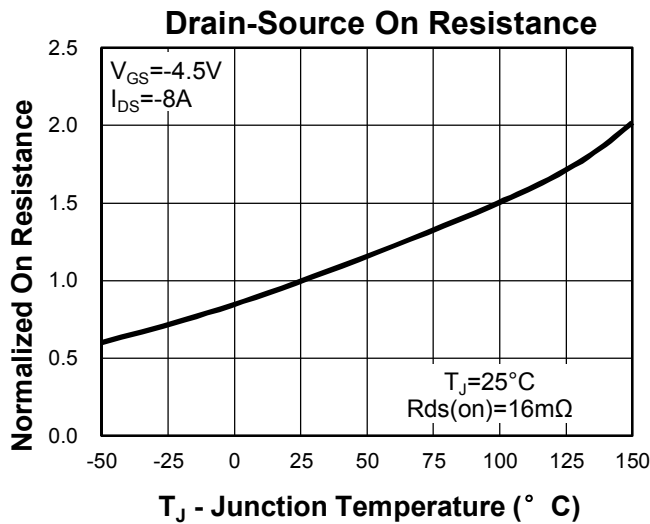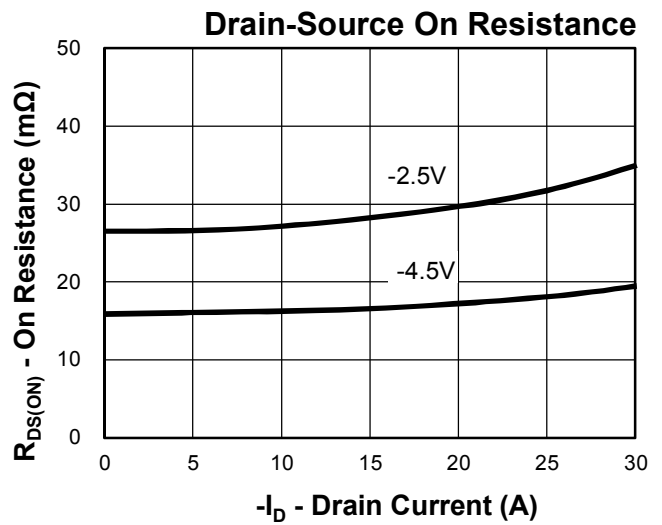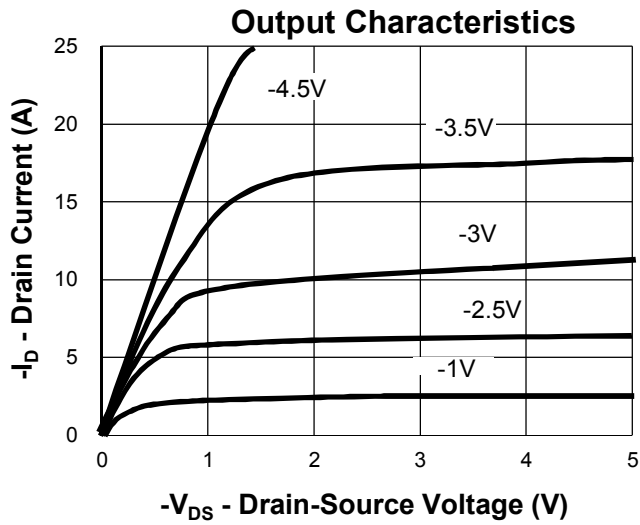

**Avalanche Test Circuit and Waveforms**

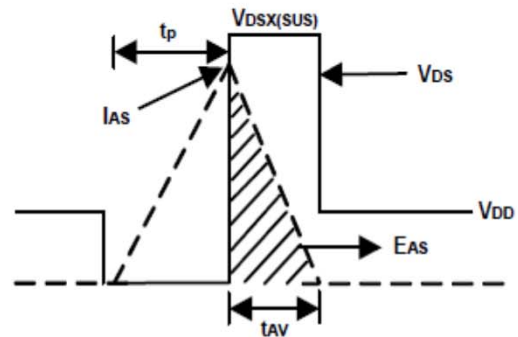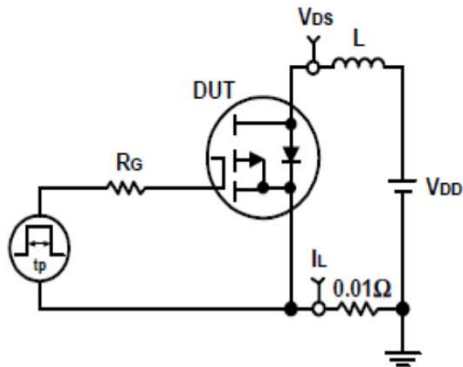


**Switching Time Test Circuit and Waveforms**

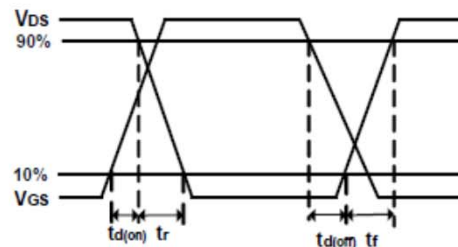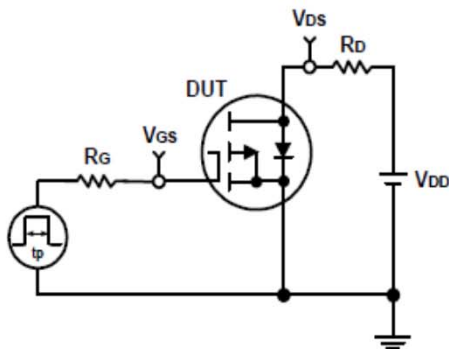

**Package Information**

**PDFN3333**

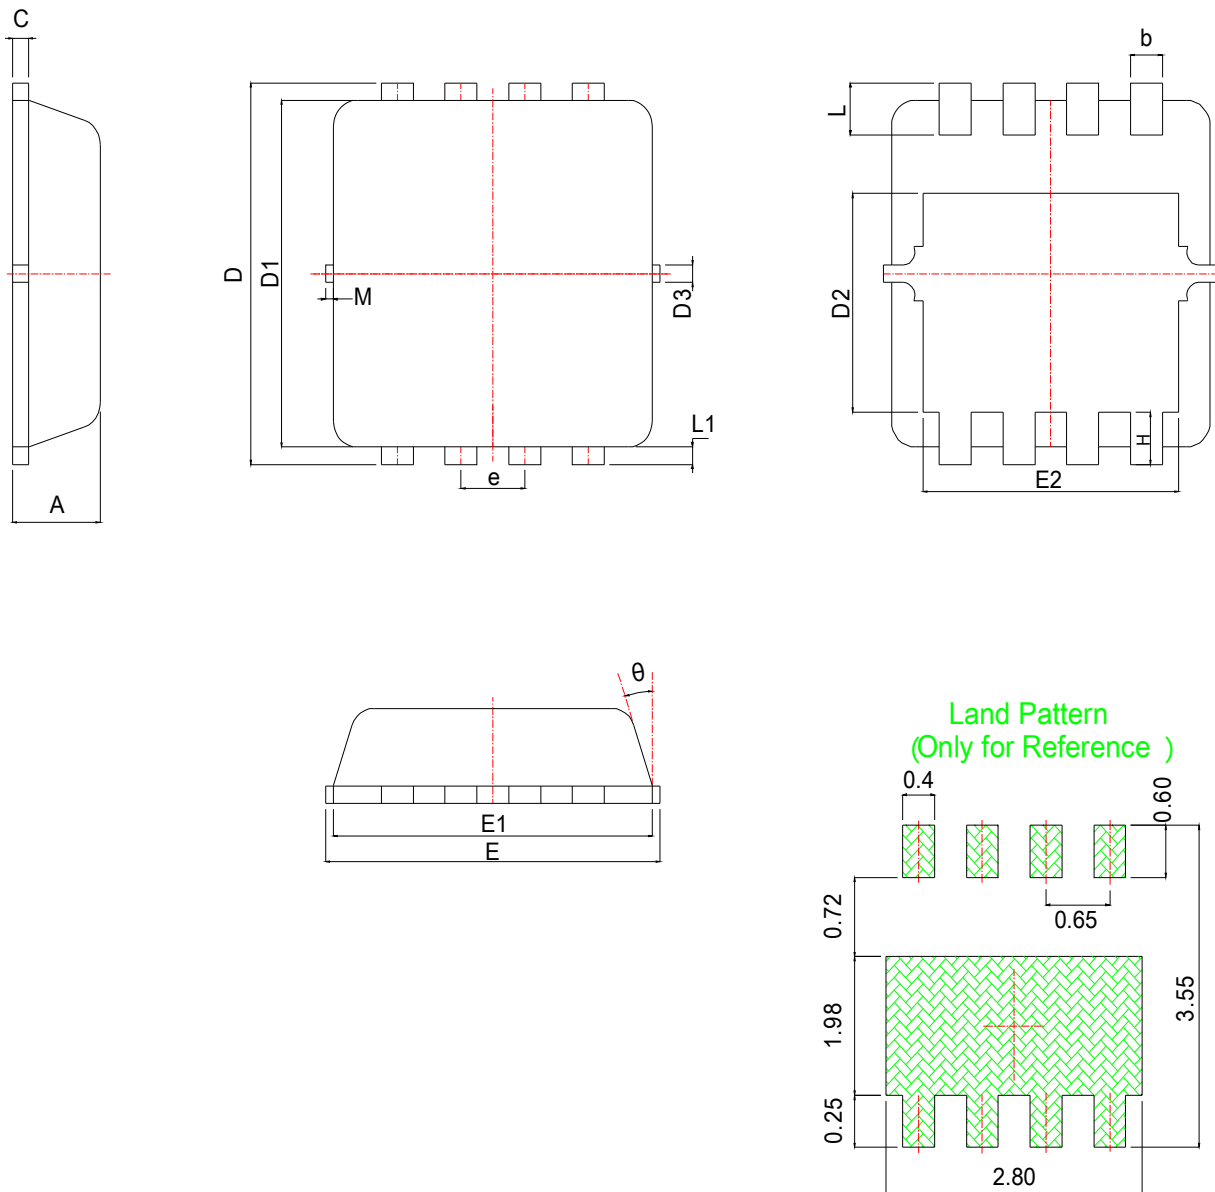

SYMBOL	MM			INCH			SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX		MIN	NOM	MAX	MIN	NOM	MAX
A	0.70	0.75	0.80	0.028	0.030	0.031	E1	3.00	3.15	3.20	0.118	0.122	0.126
b	0.25	0.30	0.35	0.010	0.012	0.014	E2	2.39	2.49	2.59	0.094	0.098	0.102
c	0.10	0.15	0.25	0.004	0.007	0.010	e	0.65BSC			0.026BSC		
D	3.25	3.35	3.45	0.128	0.132	0.136	H	0.30	0.40	0.50	0.012	0.016	0.020
D1	3.00	3.10	3.20	0.118	0.122	0.126	L	0.30	0.40	0.50	0.012	0.016	0.020
D2	1.78	1.88	1.98	0.070	0.074	0.078	L1	*	0.13	*	*	0.005	*
D3	*	0.13	*	*	0.005	*	theta	*	10°	12°	*	10°	12°
E	3.20	3.30	3.40	0.126	0.130	0.134	M	*	*	0.15	*	*	0.006

**Customer Service****Worldwide Sales and Service:**

Sales@ruichips.com

**Technical Support:**

Technical@ruichips.com

**Investor Relations Contacts:**

Investor@ruichips.com

**Marcom Contact:**

Marcom@ruichips.com

**Editorial Contact:**

Editorial@ruichips.com

**HR Contact:**

HR@ruichips.com

**Legal Contact:**

Legal@ruichips.com

**Shen Zhen RUICHIPS Semiconductor CO., LTD**

4th Floor, Block 8, Changyuan New Material Port, Keyuan Middle Road, Science & Industry Park,  
Nanshan District, Shenzhen, CHINA

**TEL:** (86-755) 8311-5334

**FAX:** (86-755) 8311-4278

**E-mail:** Sales-SZ@ruichips.com