

Features

- Ultra low capacitance: 0.3pF typical (I/O-IO)
- Ultra low leakage: nA level
- Low operating voltage: 5V
- Low clamping voltage
- Low capacitance
- Complies with following standards:

IEC 61000-4-2 (ESD) immunity test

Air discharge : $\pm 20\text{kV}$

Contact discharge : $\pm 17\text{kV}$

- IEC61000-4-5 (Lightning) 6A (8/20 μs)
- IEC61000-4-4 (EFT) 40A (5/50ns)
- RoHS Compliant


Mechanical Characteristics

- Package: SOT363
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram Below
- Shipping Qty : 3000pcs/7Inch Tape & Reel

Applications

- Monitors and flat panel displays
- Set-top box and Digital TV
- Video graphics cards
- Digital Video Interface (DVI)

Dimensions and Pin Configuration



Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Current (8/20μs)	Ipp	6	A
ESD per IEC 61000-4-2 (Air)	VESD	±20	kV
ESD per IEC 61000-4-2 (Contact)		±17	
Operating Temperature Range	TJ	-55 to +125	°C
Storage Temperature Range	Tstg	-55 to +150	°C

Electrical Characteristics (TA=25°C unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM			5	V	
Breakdown Voltage	VBR	6	7.5	8.5	V	IT = 1mA
Reverse Leakage Current	IR			0.1	uA	VRWM = 5V
Clamping Voltage	VC			10	V	Ipp=1A(8x 20us pulse)
Clamping Voltage	VC			13	v	Ipp=5A(8x 20us pulse)
Junction Capacitance	CJ		0.6	0.8	pF	VR = 0V, f = 1MHz, IO to GND
Junction Capacitance	CJ		0.3		pF	VR = 0V, f = 1MHz, IO to IO

Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

Fig1. 8/20 μs Pulse Waveform

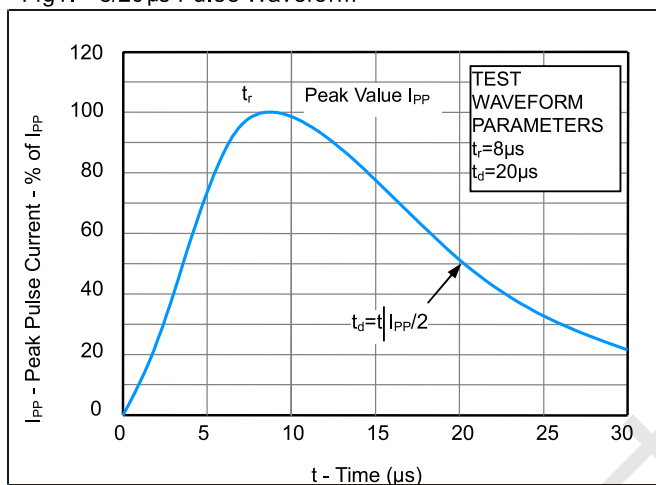


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)



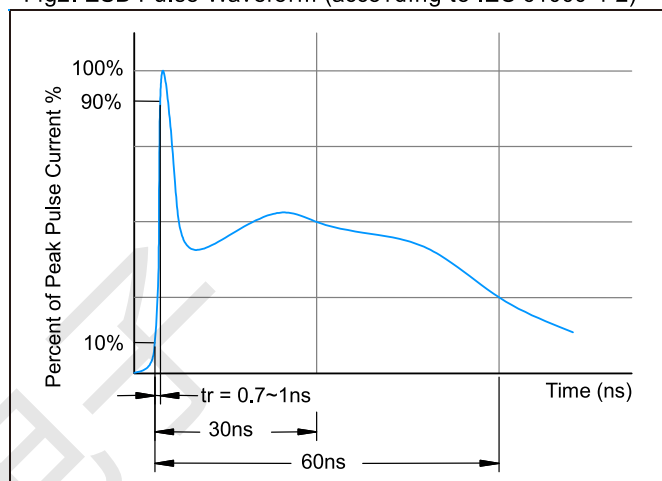


Fig3. Power Derating Curve

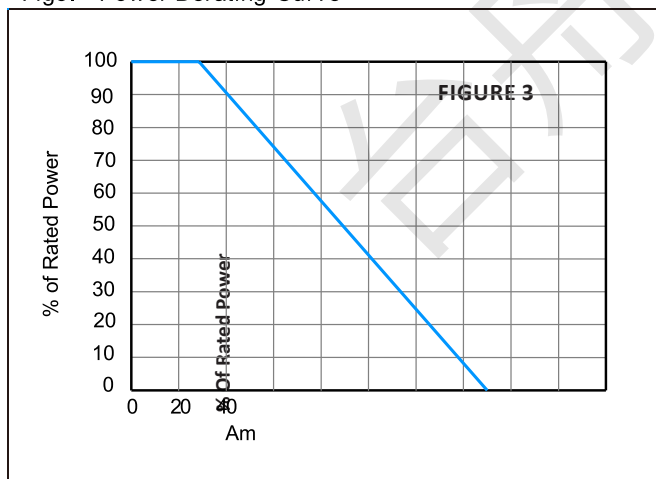

SOT-363 Package Outline Drawing

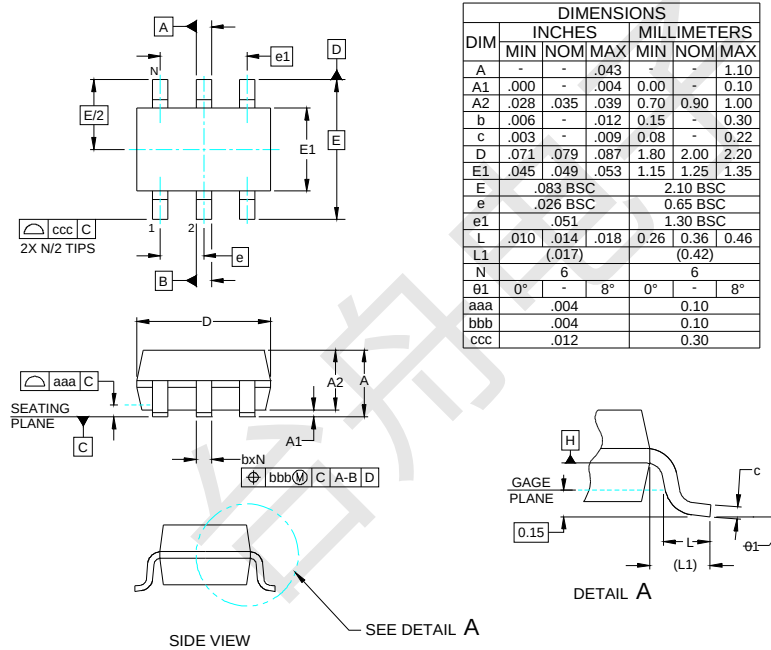

Suggested Land Pattern

