

型号 : SBT952


特点与用途/Features&Application



SBT952力值显示控制仪在同等价位的产品中，速度更快，可达4800次/秒，同时客户在选型过程中，可在基本款基础上选择添加TEDS，模拟量等功能。此控制仪的比较器也比较灵活，比较方式多样，用户可自己搭建比较模式。

SBT952 force value display control device in the same price products, faster, up to 4800 times per second, at the same time, customers in the process of selection, can choose to add TEDS, on the basis of basic analog, and other functions. The controller of the comparator is more flexible and more diverse ways, the user can build more patterns.

安装尺寸/Mounting Dimension

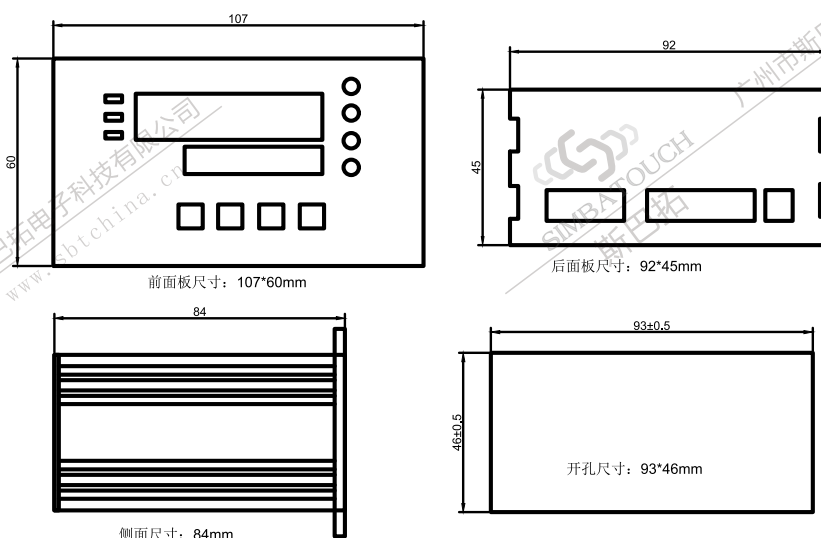

技术参数/Technical Parameters

| 参数 | Specifications | 技术指标/Technique |
|---------|---------------------------|--|
| 供电电压 | The power supply voltage | DC: 12V--30V |
| 输入灵敏度 | The input sensitivity | 0.4~6mV/V |
| 传感器激励电压 | Sensor excitation voltage | 5VDC±2%, 100mA, (最多接6只350Ω的传感器) |
| 综合精度 | Comprehensive precision | ≤±0.05FS |
| 额定输出 | Rated output | 支持Modbus RTU, ASCII和自由协议 同时支持RS232T和RS485 |
| 输出速率 | The output rate | 最高4800次/秒 |
| 工作温度 | Working temperature | -10~55℃ |
| 防护等级 | Protection grade | Ip65 |
| 显示窗口 | Display window | 双排六位LED |