

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.
(塑胶: 黑色 LCP, 防火等级 UL 94V-0)

Contact: Copper Alloy (铜) T=0.15mm
盖子卡扣: PA

PLATING:






Contact: Plated 50u" Ni Overall Contact Au 3U, pad TIN
(端子: 镍层50u, 接触点3u, 焊点镀50u最少)

Electrical:




Current Rating : 2Amps.max(额定电流: 2A最大)
Voltage Rating : 5V AC/DC(额定电压: 5V AC/DC)
Ambient Temperature Range : -20°C~+80°C(工作温度: -20度到+60度)
Storage Temperature Range : -20°C~+80°C(工作环境: -20度到+80度)
Ambient Humidity Range : 95% R.H. Max.(上锡效果: 95%以上)
Contact Resistance: 100m max.(端子接触电阻: 100m 最大)
Insulation Resistance: 1000M min./500VDC(绝缘阻抗: 1000兆欧最小)

产品耐温温度: 260度


Mating Cycles: 5000Min Insertions(寿命: 5000次)

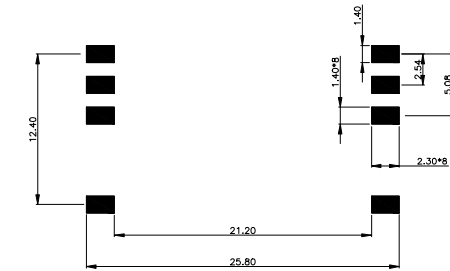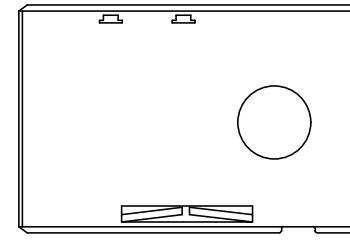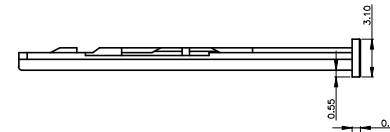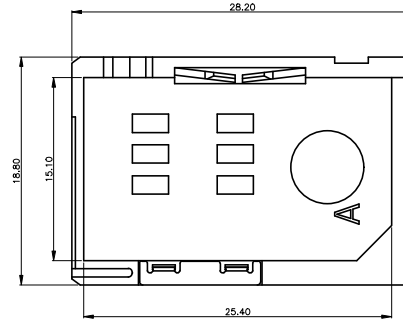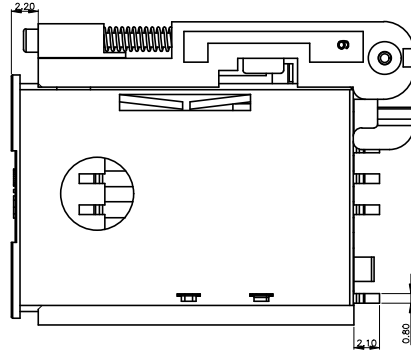

RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)
RECOMMENDED MTRL. MGR. T=0.12MM

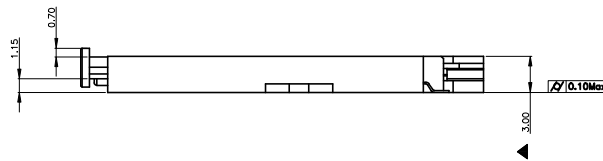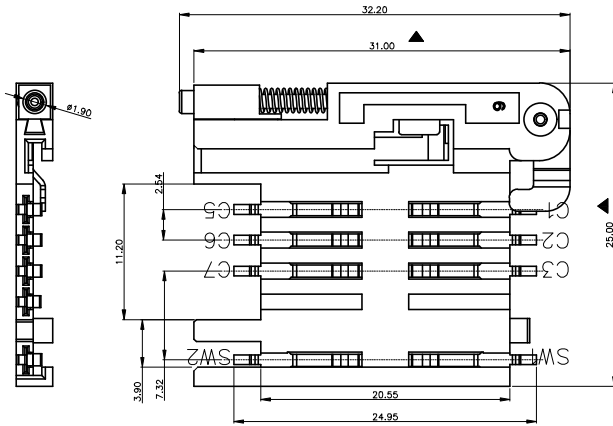

PIN NO.	PIN NAME
C1	Supply Voltage Vcc
C2	Reset (RST)
C3	Clock (CLK)
C4	N/A
C5	Ground
C6	Programming Voltage Vpp
C7	I/O
C8	N/A



UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.20	X.X :±1°
X.XX :±0.10	



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	Sim 3.0H卡式 PUSH卡卡		
DWN	xiong	SIM-212	
CHKD	lee	SCALE:1:1	UNIT: mm
APVD	wang	SIZE: A4	SHEET:10F 1
			REV: A4

CUSTOMER COPY