

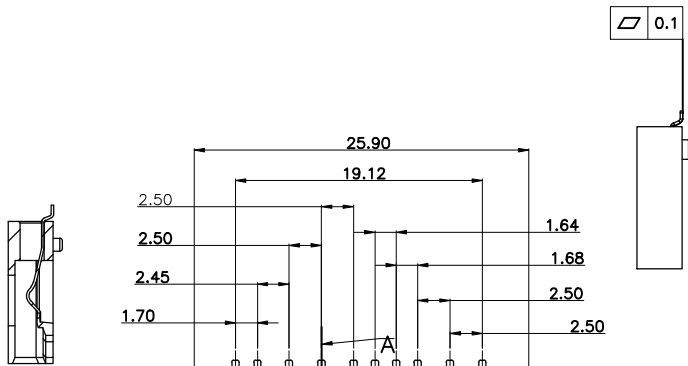
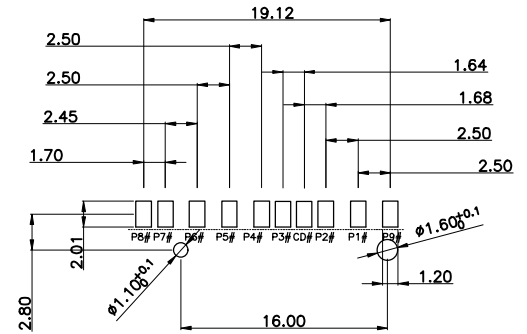


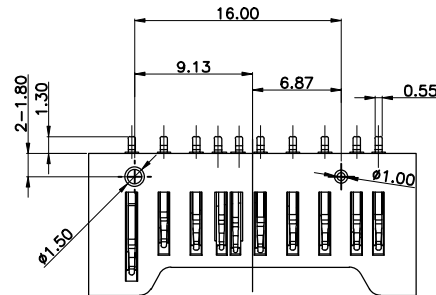

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

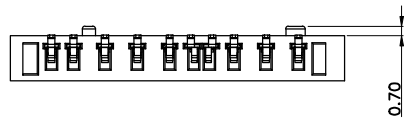


PIN#	NAME	DESCRIPTION
1	DAT3	DATA LINE BIT3
2	CMD	COMMAND/RESPONSE
3	VSS1	SUPPLY VOLTAGE GROUND
4	VDD1	SUPPLY VOLTAGE
5	CLK	CLOCK
6	VSS2	SUPPLY VOLTAGE GROUND
7	DAT0	DATA LINE BIT0
8	DAT1	DATA LINE BIT1
9	DAT2	DATA LINE BIT2

Notes:

- 1.All Dimensions are in Millimeters.
- 2.Operation voltage: 100 VAC max.
- 3.Current rating : 1 Amps max.
- 4.Contact resistance: 100m ohms max.
- 5.Insulation resistance: 1000M ohms min. 500 VDC
- 6.Dielectric withstanding voltage: 500 VAC / 1minute
- 7.Operating Temperature: -40°C to +85°C
- 8.Storage Temperature: -40°C to +85°C
- 9.Material see table.
10. Total Mating Force : 40N (MAX) at 25 mm/minute
- 11.Total Unmating Force: 2N (MIN) at 25 mm/minute

SECTION A-A

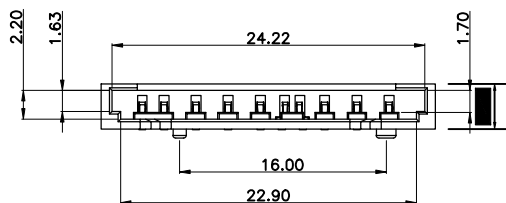

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.20	X.X :±1°
X.XX :±0.10	



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	SD CARD CONN全塑短体正向型		
DWN	xiong	PART NO. SD-116	
CHKD	lee	SCALE:1:1	UNIT: mm
APVD	wang	SIZE: A4	SHEET:10F 1
			REV: A4

CUSTOMER COPY