


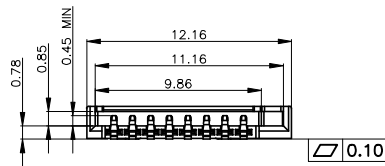



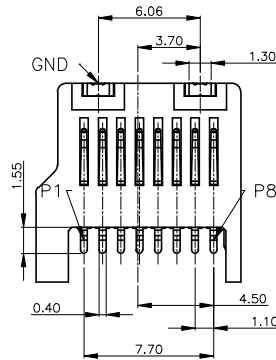


REV.	ECN NO OR DESCRIPTION	REVISED	DATE

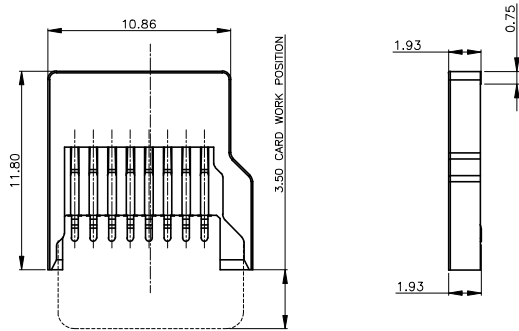

PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

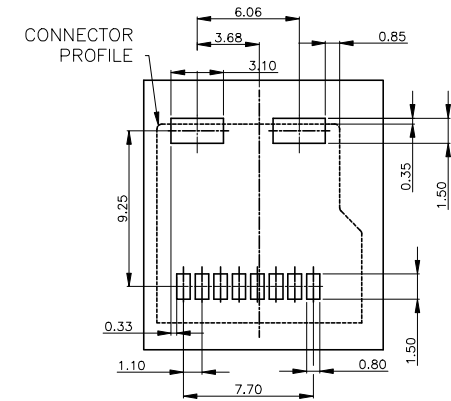

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

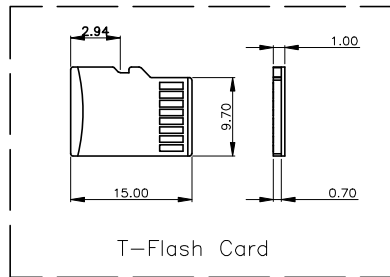

NOTES:
1.MATERIAL:
 HOUSING:LCP E130I,UL 94V-0,30%G/F FILLED;
 COLOR:BLACK
 CONTACT:COPPER ALLOY T=0.15MM
 GROUND:COPPER ALLOY T=0.15MM
2.FINISH:
 CONTACT: 1U" GOLD PLATING ON CONTACT AREA
 TIN 100U" MIN PLATING ON SOLDER TAILS
 50U" MIN NICKEL UNDERPLATING OVER ALL
 GROUND: SN 100U" MIN PLATING ON SOLDER TAILS
 50U" MIN NICKEL UNDERPLATING OVER ALL
3.PRODUCT SPECIFICATIONS:
 VOLTAGE RATING: 50V
 CURRENT RATING: 0.5A
 INSULATION RESISTANCE: 500MEG.OHM MIN
 CONTACT RESISTANCE: 50 MILL.OHM MAX
 OPERATION TEMPERATURE: -20° TO +85°
 DURABILITY: 5000 CYCLES

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:	ANGLES:	TITLE	T-FLASH 全塑筒形T卡		
X :±0.5	X :±2°	DWN	xiong	TF-017	
X.X :±0.20	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm
X.XX :±0.10		APVD	wang	SIZE: A4	SHEET:10F 1
		REV: A4			
CUSTOMER COPY					