

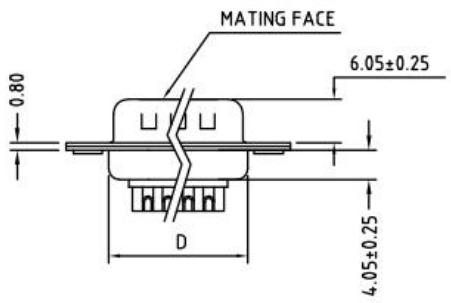


ROHS COMPLIANT

| REV. | DESCRIPTION | DATE | ECN NO. |
|------|-------------|------------|---------|
| 01 | NEW DESIGN | 2018/06/07 | - |

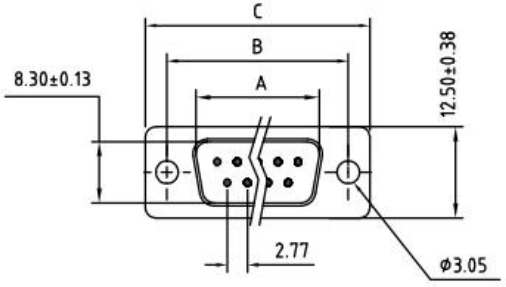

| No. of Contact | A ± 0.25 ± 0.10 | B ± 0.13 ± 0.05 | C ± 0.38 ± 0.15 | D ± 0.25 ± 0.10 |
|----------------|----------------------------|----------------------------|----------------------------|----------------------------|
| 09 | 16.90 | 25.00 | 30.80 | 19.28 |
| 15 | 25.35 | 33.30 | 39.20 | 27.51 |
| 25 | 39.00 | 47.04 | 53.04 | 41.28 |
| 37 | 55.42 | 63.50 | 69.40 | 57.71 |

REMARKS:

1. MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT NICKEL FINISHED
 BACK SHELL TIN FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : FULL GOLD FLASH

2. ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

| | | |
|--|--------------|-------------|
| DRAWN: | JEFF.ZHOU | 2018.06.07 |
| CHECKED: | KEVIN.JIN | 2018.06.07 |
| APPROVED: | JINGUO.YANG | 2018.06.07 |
| | Sheet 1 of 1 | Code 000 |
| Dimensions in mm(inches) | | Scale 1:1 |
| TOLERANCE UNLESS SPECIFIED: .XX ± 0.13 | | Angles: ±2° |

东莞市赢海电子有限公司

TITLE:
 D-SUB Male Solder Type
 REV. 01 Part No: GDM09M-180°