RoHS

MAPX	MODIFICATION	DRW	DATE

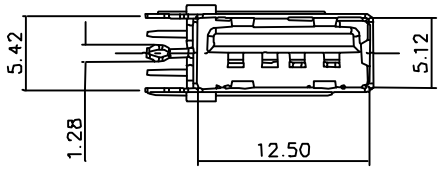

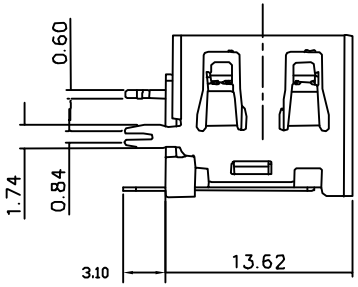



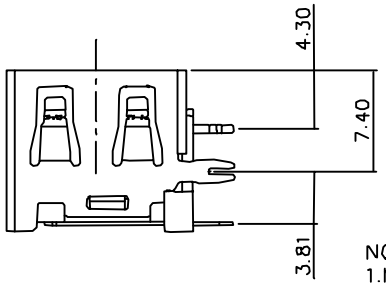

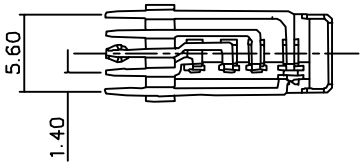

NOTE
1.MATERIAL
HOUSING. THERMOPLASTIC
SHELL. SPCC OR COPPER ALLOY
CONTACT COPPER ALLOY
2 ELECTRICAL PERFORMACE·
2 1 CURRENT· 2A MIN
2 2 CONTACT RESISTANCE 30mOHMS MAX.
2 3 DIELECTRIC STRENGTH
UNMATED· 500V AC RMS
2.4 INSULATION RESISTANCE. 100MOHMS MIN
3.MECHANICAL PERFORMANCE:
3 1 INSERTION FORCE· 35N MAX.
3 2 WITHDRAWAL FORCE. 4N MIN
35N MAX.
3.3 TEMPERATURE RANGE. -25°C TO 85°C

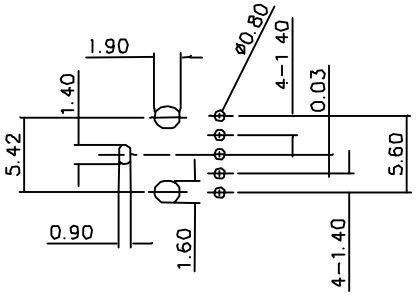

RECOMMENDED PCB LAYOUT

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.35	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.10	.XX	±1.°
.XXX	±0.05	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	许榕强	制图料号 PRODUCT PART NO.	906-862A1019D102WD		
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF11.8侧插外鱼叉内O型脚无边铜壳PBT白胶/5PIN		
日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW		版本 VER	A0