

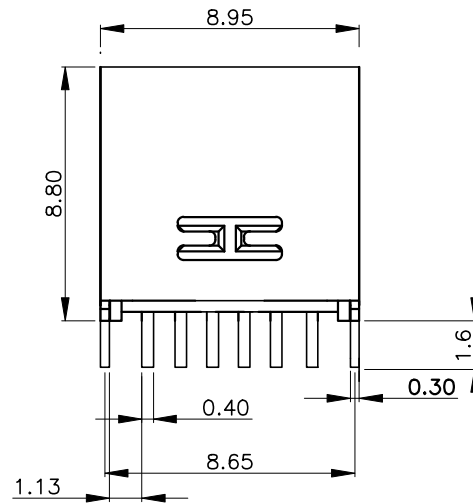
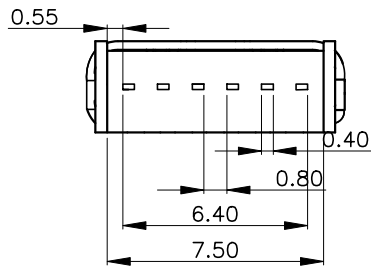
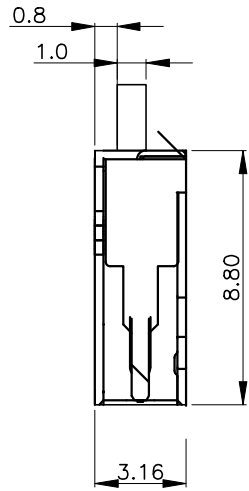


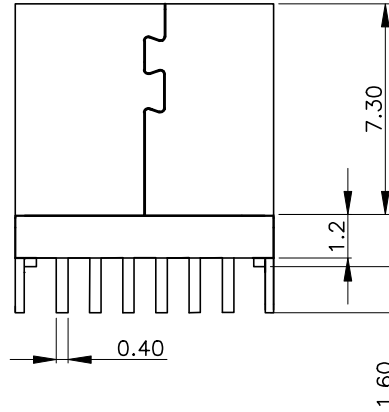


REV.	ECN NO OR DESCRIPTION	REVISED	DATE



- NOTES:
- MATERIAL:**
 MOLDING: LCP UL94 V-0
 CONTACT: COPPER ALLOY.
 GOLD PLATED Min ON CONTACT AREA, 100u"
 Min TIN (LEAD FREE) ON SOLDER AREA,
 SHELL: SUS201-H,T=0.30±0.03mm
 50u" NICKEL PLATING OVER ALL.
 - MECHANICAL:**
 INSERTION: 5~20N.
 EXTRACTION: 8~20N AFTER TEST.
 DURABILITY: 5000 CYCLES
 - ELECTRICAL:**
 CURRENT: 3A FOR VBUS;
 1.25A FOR GND PIN.
 0.25A FOR OTHER.
 VOLTAGE: 20 V MAX
 WITHSTANDING VOLTAGE: 100V AC R.M.S.
 CONTACT RESISTANCE: 40mΩ MAX.
 INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL**
 TEMPERATURE RANGE -25°C ~ +85°C
 - 尺寸标注单位: mm
 公差标注: ① 为形位公差, ② 为制造尺寸.
 - 产品符合RoHS标准.

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

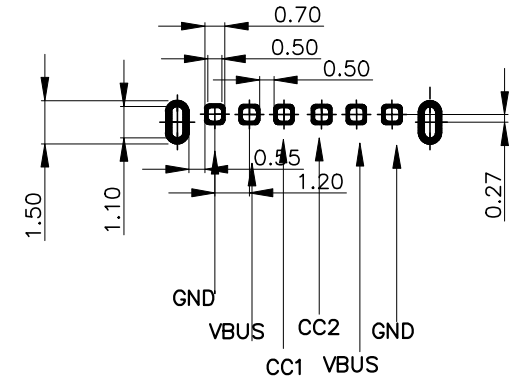

RECOMMENDED P.C.B. LAYOUT
 TOLERANCE UNSPECIFIED ±0.05mm

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:	ANGLES:	TITLE: USB TYPE C 6PIN PLUG 筒形版直插 8.8			
.X :±0.35	.X :±1.5°	DWN	xiong	MC-513	
.XX :±0.25	.XX :±1°	CHKD	lee	SCALE:1:1	UNIT: mm
.XXX :±0.20		APVD	wang	SIZE: A4	SHEET:10F 1
		REV: A4			
CUSTOMER COPY					