


MAPX	MODIFICATION	DATE

特性: Specifications:
 电器: Electrical:
 接触阻抗: Contact Resistance
 30 milliohms Max
 耐电压: Dielectric Withstanding Voltage:
 500V AC Sea Level
 绝缘阻抗: Insulation Resistance:
 100 MEGA ohms MIN
 材料: Material:
 塑胶Housing:Hing Temperature
 Thermoplastics.
 LCP 耐高温塑胶
 端子: Contact: Copper Alloy铜合金
 铜壳Shell:Copper Alloy 铜合金
 电镀Finish:
 端子Contact:Plated Gold In Mating
 Area:
 Tin On Slder Talls
 接触点镀金。脚镀锡
 铜壳: Shell:
 Nickel/Plating 镀镍

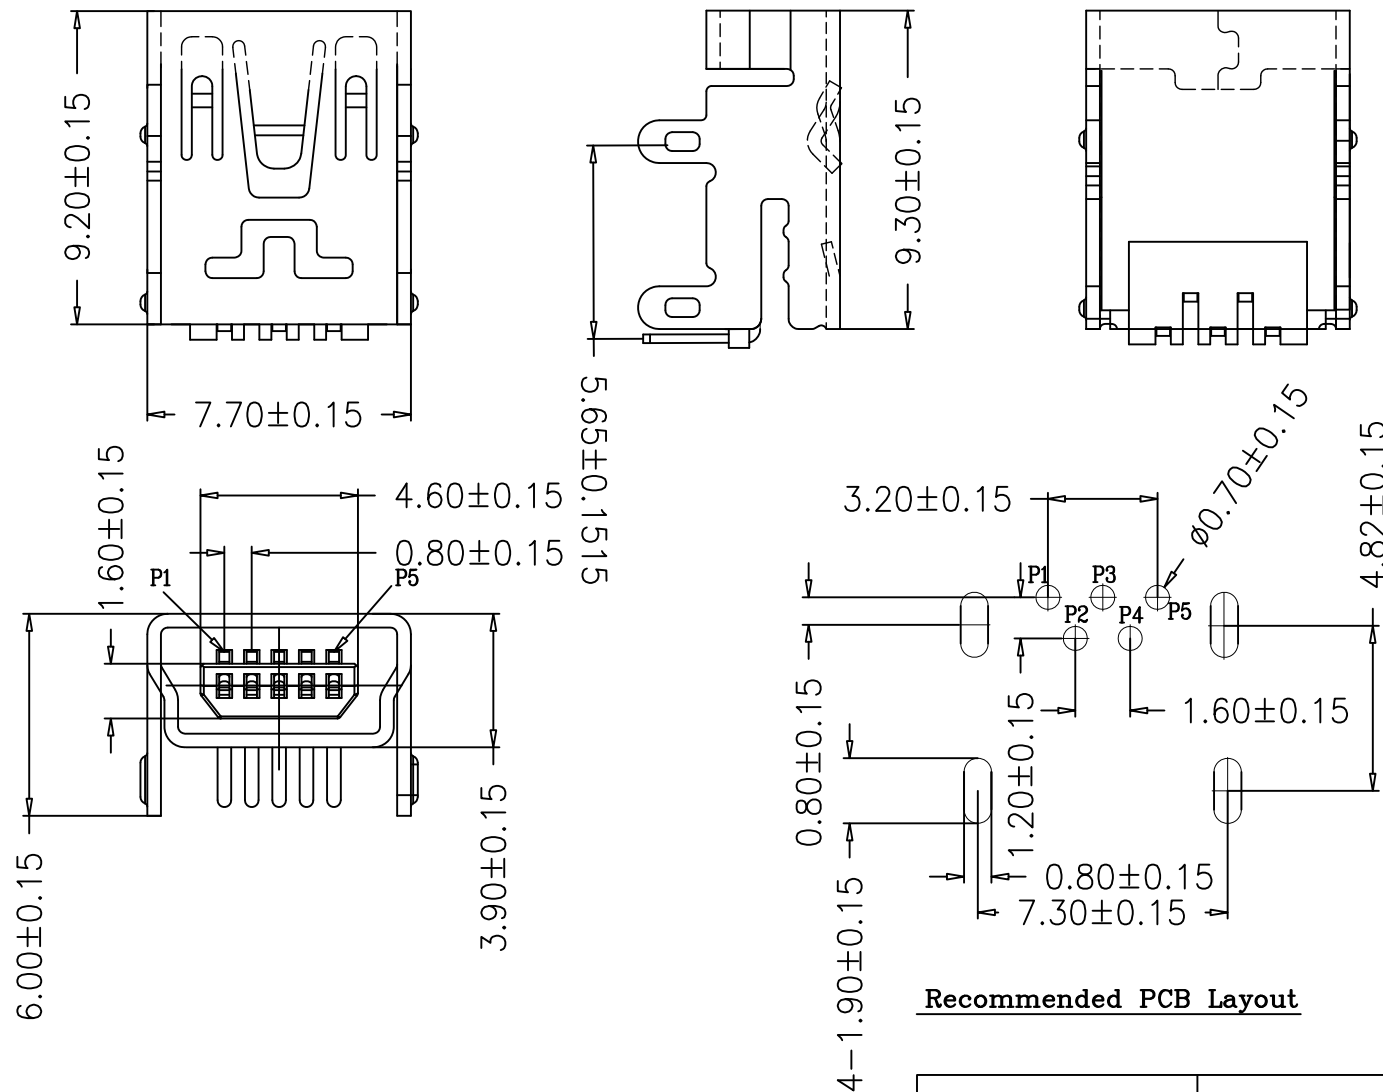

Recommended PCB Layout

PIN NO.	SIGNAL NAME
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	ID
PIN 5	GND
SHELL	SHIELD

产品图 PRODUCT CHART DWG 公差一览表 TOLERANCE UNLESS OTHERWISE		深圳市精拓金电子有限公司									
X	±0.25	X	±5.°	单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	920-462A2021D10102		
.X	±0.20	.X	±2.°	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	MINI/5P母座四脚铜壳LCP黑胶90度		
.XX	±0.15	.XX	±1.°	日期 DATE	2013.05.15	核准 APPD		角法 VIEW		版本 VER	AO
.XXX	±0.10	.XXX	±0.5°								