
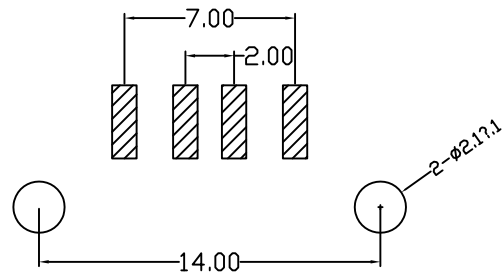
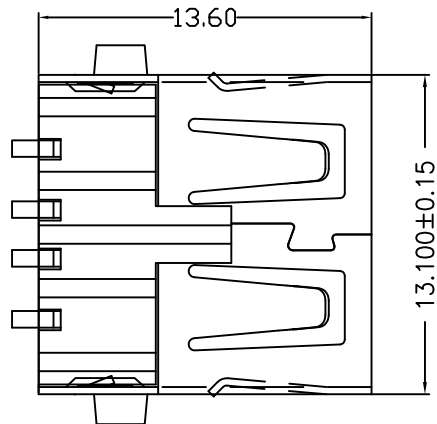
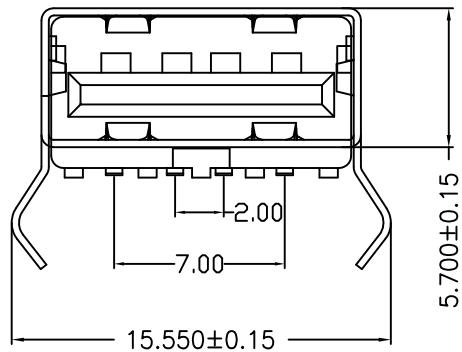


目錄 MAPX	设变内容 MODIFICATION	日期 DATE

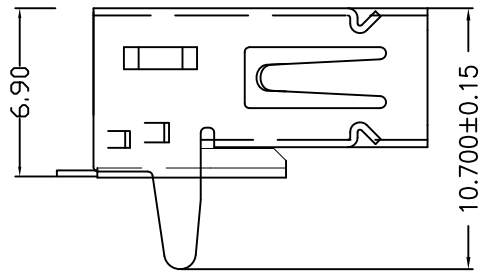

RBCOMMENDBD P.C.B PATTBRN LAYO UT

NOTES:

Housing: Thermoplastics,UL94V-0  
 Contact: Copper Alloy  
 Shell: Copper Alloy/Steel  
 Voltage Current Rating:1.5 AMP. 30V AC  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:30 MΩ Max.  
 Dielectric Withstanding Voltage:500V AC  
 Temperature Range:-35°C to +85°C  
 Insulator color: Black/White  
 Plastic material:PBT/LCP/Others  
 Shell finish:Nickel plated/Tin-Lead plated  
 Mechanical:  
 Mating Force:3.5KG MAX  
 Unmating Force:0.7 KG MIN.  
 Contact finish:

- 01:Selective Gold Flash
- 02:Selective Gold 3U"
- 03:Selective Gold 5U"
- 04:Selective Gold 15U"
- 05:Selective Gold 30U"

备注：侧弹分为外弹与内弹

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	903-141B1011S10100
X.	±0.15	X'	±5'	比例 SCALE	审核 CHKD	产品名称 PRODUCT NO.	AF无后盖弯脚无边内弹铁壳反向 T型PBT白胶SMT
.X	±0.10	.X'	±2'				
.XX	±0.05	.XX'	±1'	日期 DATE	核准 APPD	角法 VIEW	版本 VER
.XXX	±0.03	.XXX'	±0.5'				
		2009/10/20		雷永键	雷永键	角法 VIEW	A0