







SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

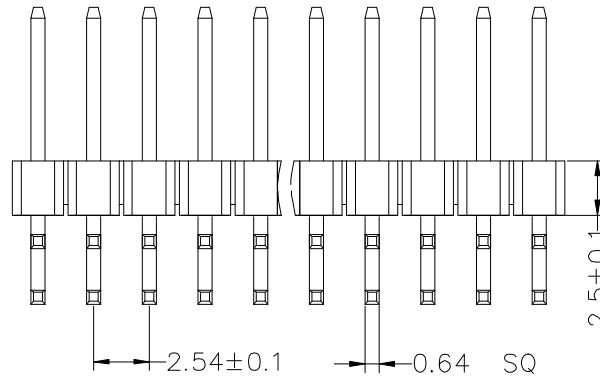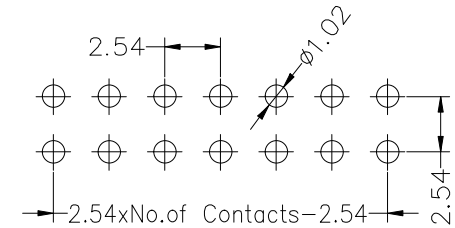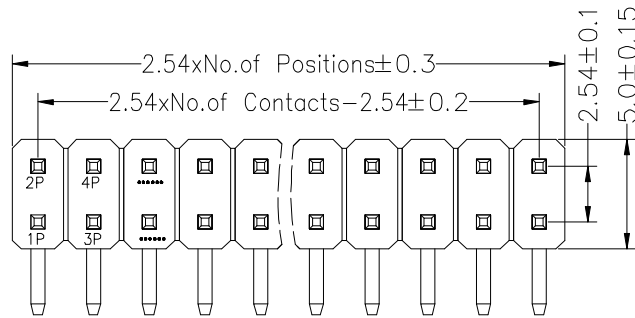

Dimension antitheses list					
ITEM	PA	PC	PB	L短	L长
Standard	6.00	3.00	6.90	13.80	18.80
Alternate					

OPERATION		DRAW	WZG	14.05.16	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	☉
DIM	TOL					

深圳市华灿天禄电子有限公司

PART NO.	PZ254-2-N-W-8.5
TITLE:	2.54PH H2.5 Dual Row 90° 正弯

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1			