

6

5

4

3


2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	6/15/12	

APPROVED: _____

DATE: _____ TITLE: _____


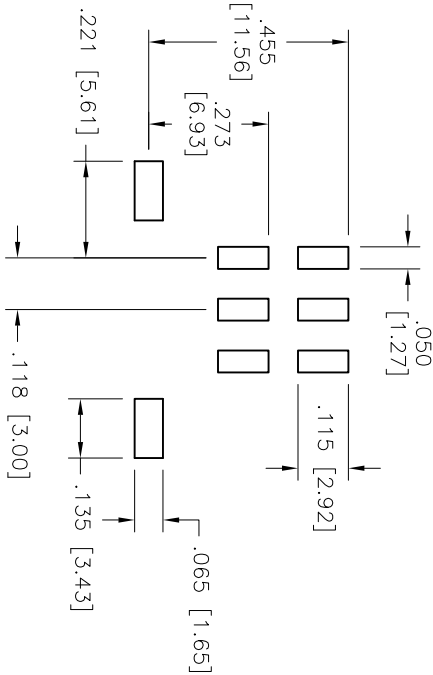


PCB Layout: Component side

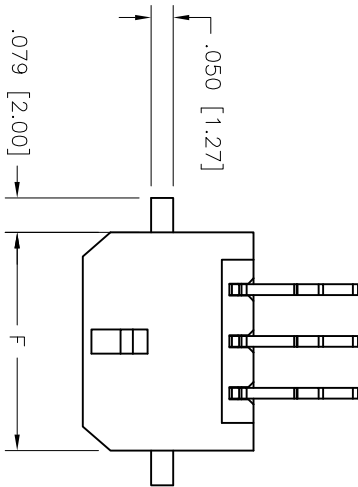

Dimensional Information

CIRCUITS	DIM. E	DIM. F	CIRCUITS	DIM. E	DIM. F
2		6.65	14	18.0	24.65
4	3.0	9.65	16	21.0	27.65
6	6.0	12.65	18	24.0	30.65
8	9.0	15.65	20	27.0	33.65
10	12.0	18.65	22	30.0	36.65
12	15.0	21.65	24	33.0	39.65

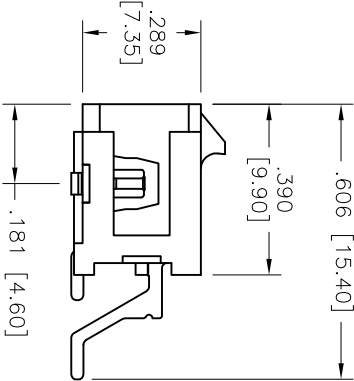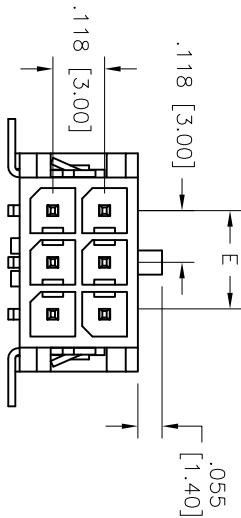

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250V AC, DC

Current rating: 5A AC, DC

Contact resistance: 10 mohms max.

Dielectric withstanding voltage: 1500 VAC for 1 minute

Temperature Rating:

Ambient temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

DUAL ROW, .118"(3.0MM) PITCH, SMT HOUSING
& TERMINAL, W/ FITTING NAIL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	APPROVALS			
DRAWN		AY	6/15/12	CHECKED		AH	6/15/12
APPROVED				REV.			

6

5

4

3

2

1