


Through-beam laser sensor receiver

OGELFPKG/US100



1 programming buttons

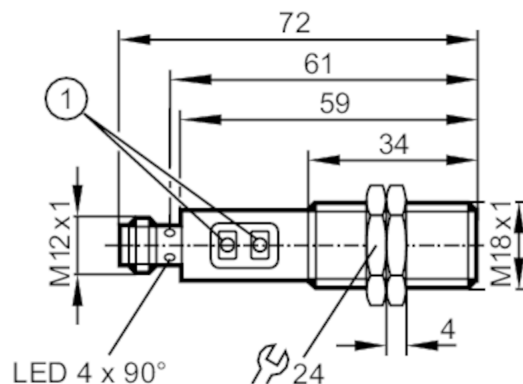

Product characteristics

Type of light	red light
Housing	threaded type
Dimensions [mm]	M18 x 1 / L = 72

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	11
Protection class	II
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	655
Typ. lifetime [h]	50000

Outputs

Electrical design	PNP
Output function	light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	1000
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes



Through-beam laser sensor receiver

OGELFPKG/US100

Detection zone		
Transmitter / receiver		receiver
Range [m]		< 60
Factory setting		dark-on mode
Range adjustable		yes
Diameter of the smallest detectable object [mm]		3; (60 m)
Operating conditions		
Ambient temperature [°C]		-10...60
Protection		IP 65; IP 67
Tests / approvals		
EMC	EN 60947-5-2	
MTTF [years]		786
Mechanical data		
Weight [g]		61.9
Housing		threaded type
Dimensions [mm]		M18 x 1 / L = 72
Thread designation		M18 x 1
Materials		stainless steel (1.4404 / 316L); PA; LCP; EPDM; TPU
Lens material		PMMA
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Items supplied		lock nuts: 2 x
Remarks		
Remarks		operating voltage "supply class 2" according to cULus
Pack quantity		1 pcs.
Electrical connection		

Connector: 1 x M12



OGE700



Through-beam laser sensor receiver

OGELFPKG/US100

Connection

