


Through-beam sensor receiver

O6E-FPKG/AS/3P



- 1: output function switch
 2: potentiometer sensitivity
 3: Light incidence

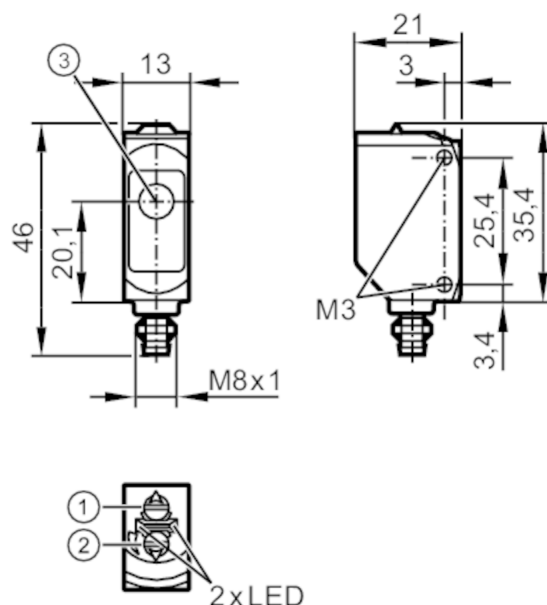

Product characteristics

Type of light	red light
Housing	rectangular
Dimensions [mm]	46 x 13 x 21

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	7; ((24 V))
Protection class	III
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	633



Through-beam sensor receiver

O6E-FPKG/AS/3P


Outputs		
Electrical design	PNP	
Output function	light-on/dark-on mode; (selectable)	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	100	
Switching frequency DC [Hz]	1000	
Short-circuit protection	yes	
Type of short-circuit protection	pulsed	
Detection zone		
Transmitter / receiver	receiver	
Range [m]	< 10	
Range adjustable	yes	
Operating conditions		
Ambient temperature [°C]	-25...60	
Protection	IP 65; IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
MTTF [years]	956	
UL approval	UL Approval no.	E001
Mechanical data		
Weight [g]	18.1	
Housing	rectangular	
Dimensions [mm]	46 x 13 x 21	
Materials	housing: ABS; PPSU	
Lens material	PMMA	
Lens alignment	side lens	
Sealing material	EPDM	
Tightening torque [Nm]	0.5	
Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
Remarks		
Remarks	operating voltage "supply class 2" according to cULus	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M8; Locking: brass, coated; Sealing: EPDM		

Through-beam sensor receiver

O6E-FPKG/AS/3P




Connection

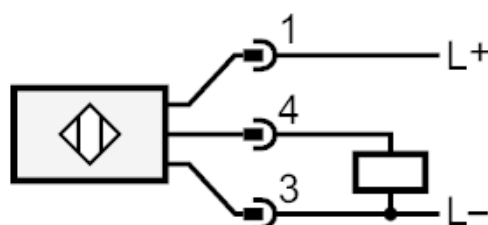

Diagrams and graphs

excess gain graph

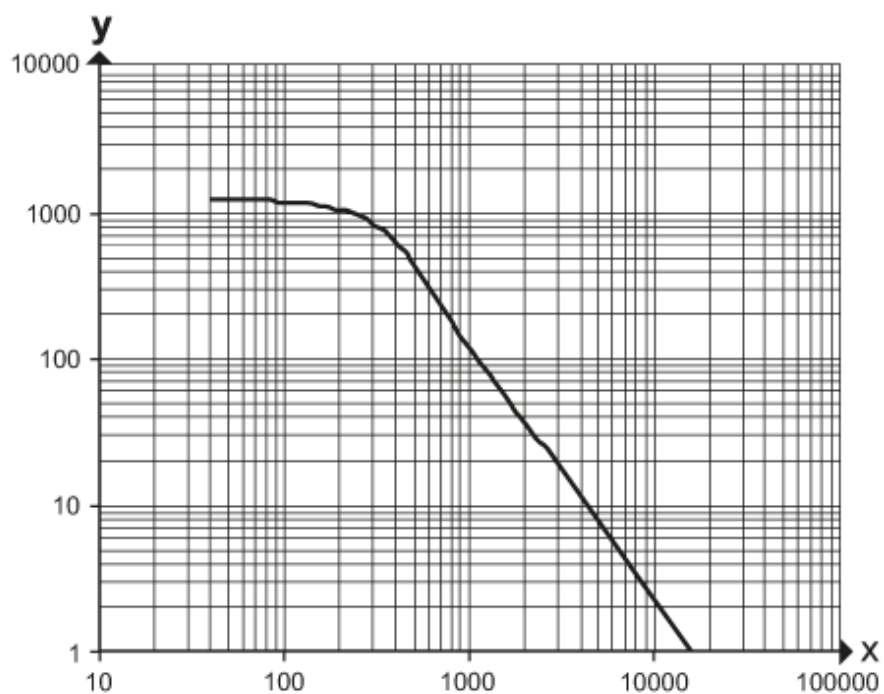

x: distance [mm]

y: excess gain factor