







SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

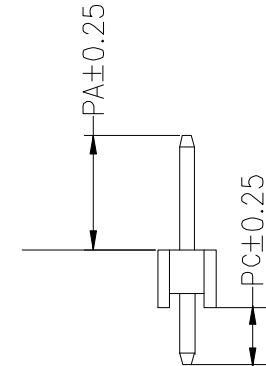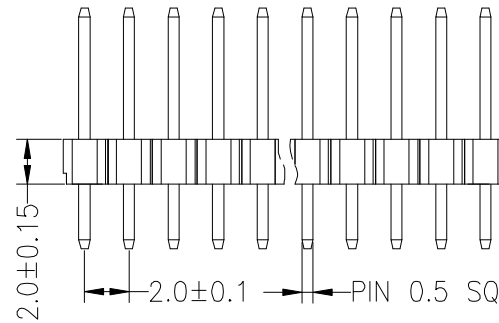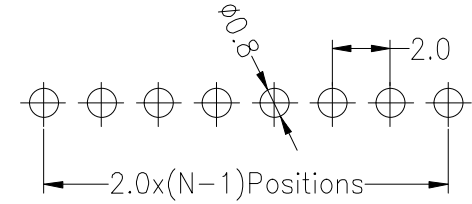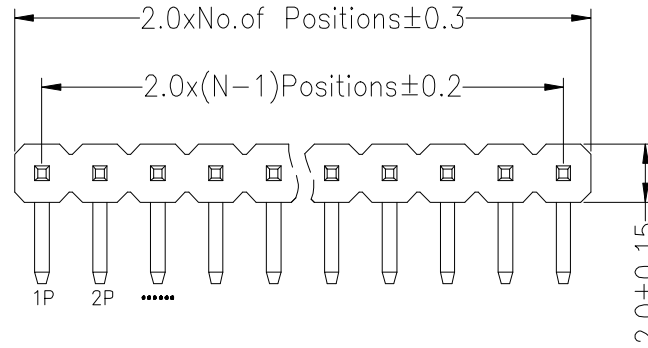

Dimension antitheses list				
ITEM	PA	PC		L
Standard	4.00	2.80		8.70
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YiYuSheng	12.10.10	SCALE	FIT	深圳市华灿天禄电子有限公司	
				DIM	TOL				UNIT	mm		
A0	2012.10.10	NEW DRAWING		X.X	±0.30	CHECK			SIZE	A4	PART NO.	PZ200-1-N-Z
				X.XX	±0.20				SHEET	1/1		
				X.XXX	±0.10				APPROVE		PROJ.	☞ ↗