
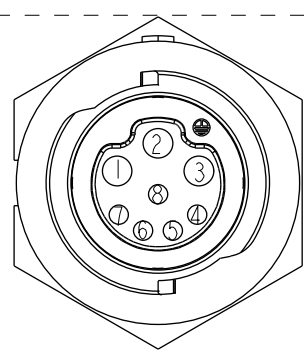
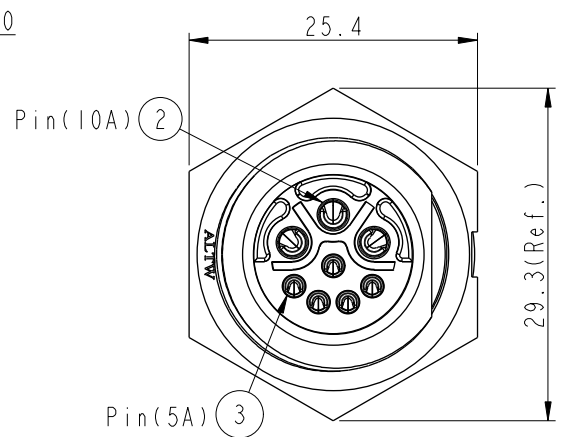
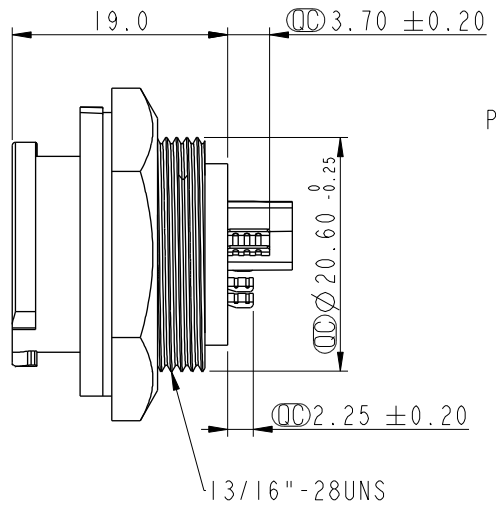



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016/05/09	Spring	Change Rev.01 To Rev.A
B	CI90470	2019/03/20	Vicky	Change Note

ALTW
CONFIDENTIAL
2019-03-20
R&D DEPT.




Pin Assignments
Front View



Recommended Panel Cut-Out

White Printing

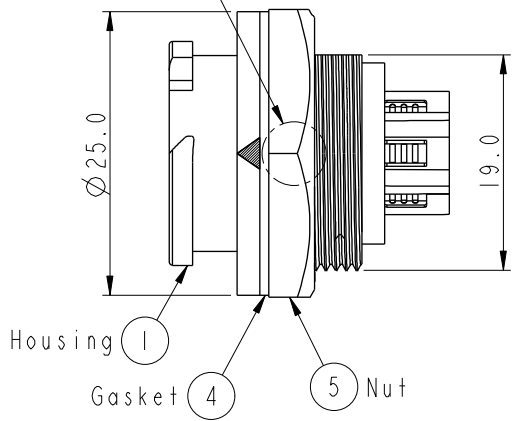

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP68, Unmated.
In 1 meter water within 24 hours
 - * Housing: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Nut: Thermoplastic, Black.
 - * Gasket: Rubber, Gray.
 - * Panel Thickness Max: 4.2mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE MIDDLE, RECEPTACLE (REAR) X-LOK (3+5) PIN M CONN F PIN		ITEM NO CBD-08RMFS-QC8001		DRAWN BY Vicky		DATE 2019-03-20	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 3:2		DWG NO CBD-08RMFS-QC8001		CHECKED BY Rita		DATE 2019-03-20	
REV. B		WC-REV. A.3		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-20	
		SHEET 1 OF 1							
		QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司