
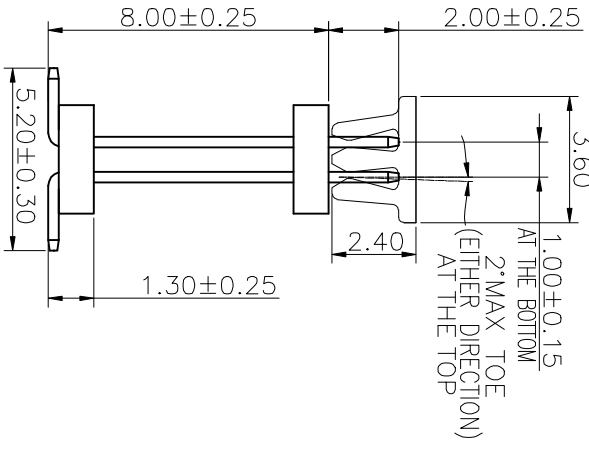
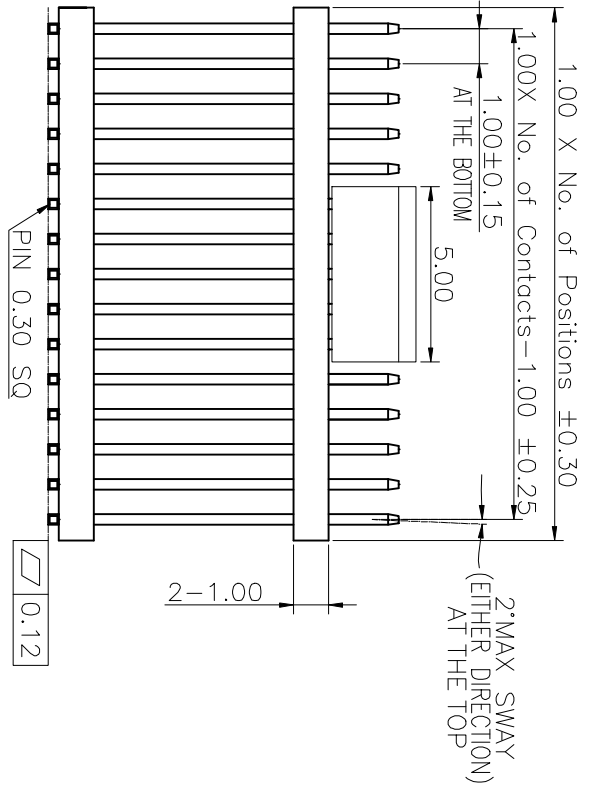



無合適膠管

The cap used above Spins

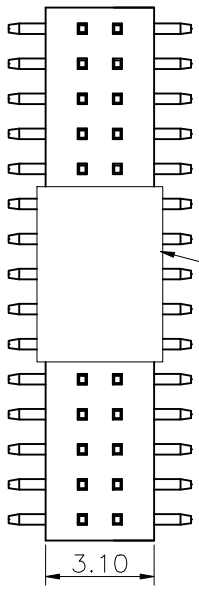

Specifications
 Current Rating:1Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP
 or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

Recommended P.C.Board Layout
 (Tolerance:±0.05)

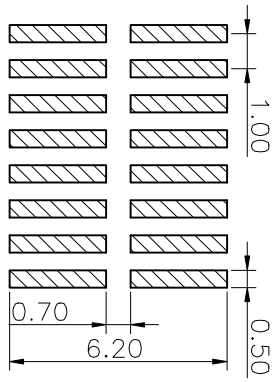

Ordering Information

G PCC205 - XX XX A 038 C 1 S X

No. of Pins per Row: 02~40
 Standard Plating: 02=Gold Flash, 01=Tin
 Color: 1=Black
 Standard Packing: C=Tube, Selective Packing, E=Cap+Tube, F=Cap+Tape&Reel, D=Tape&Reel

**格稜股份有限公司
 Greenconn Corporation**

REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1	DESIGNED: 何東華	DATE: 2020.10.13	DWG. NO. GPCC205-CA38CS	TITLE. 1.00 PIN HEADER DUAL ROWS SMT TYPE CONNECTOR
GENERAL TOLERANCE				CHECKED:	DATE:	PART NO. GPCC205-XXXX A038C1SX	
X:±5.0'	X:±3.0'	X:±0.30	X:±0.25	CO SIGNED: 張世霖	DATE: 2020.10.13		
.XX±2.0'	.XX±0.15	.XXX±1.0'	.XXX±0.10	APPROVED:	DATE:		

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2020.10.13	何東華