
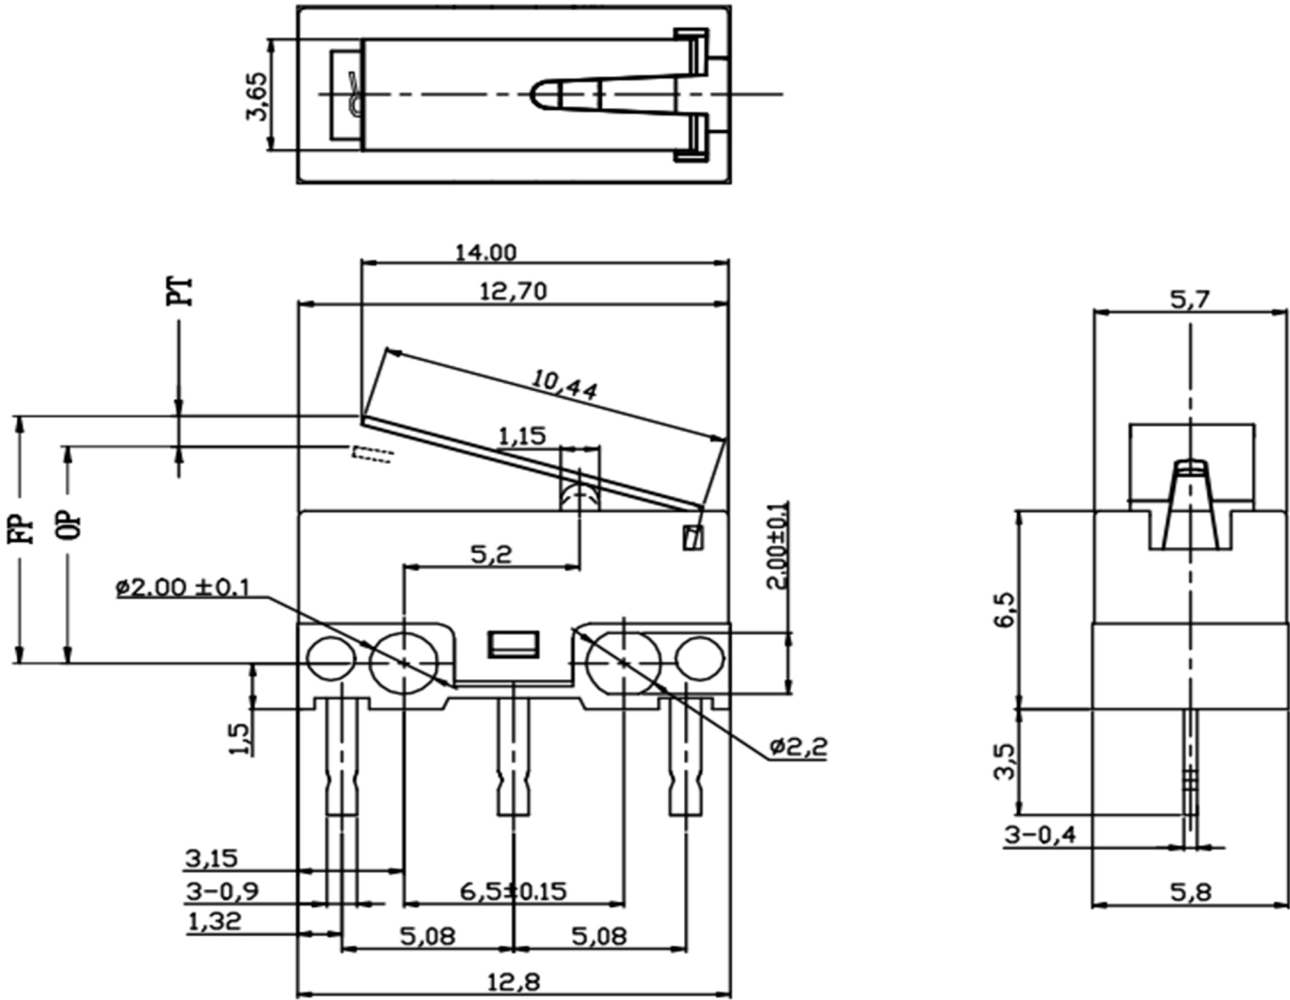


RoHS

REV.	ECN. NO.	APPD.

Circuit Diagram



NOTES:
MOUNTING HOLES WILL ACCEPT 2.0 MAX PINS OR SCREWS;

CHARACTERISITICS		ELECTRICAL DATA		X. ± 0.50	X. ° ± 2°	UNITS	 深圳市怡远科技有限公司 SHENZHEN YIYUAN TECHNOLOGY CO.,LTD	
Operating Force:	60gf Max.	CONTACT ARRANGEMENT		. X ± 0.30	. X° ± 1°	mm		
	Release Force:	S.P.D.T		. XX ± 0.10	. XX° ± 0.5°	MAT' L 	PART NO. YTD-10A03-150	TITLE: DETECT SWITCH
	Operation Position:	Ratings		. XXX ± 0.05				
	Pre Travel:	2.5MM Max.	1A / 3A 125VAC 1A / 3A 125VAC μ40T85	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF YIYUAN TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF YIYUAN TECHNOLOGY CO.,LTD	FINISH 	Q' TY 	APPD: ROGER	DWG NO. : YTD-10A03-150
Differential Travel:	0.6MM Max.	CHKD: ROC						
Over Travel:	0.3MM Min.	DR: BILLY WANG 2020/08/21					SCALE 1/1	SHEET 1/1
Free Position:	9.0±0.8 MM							