
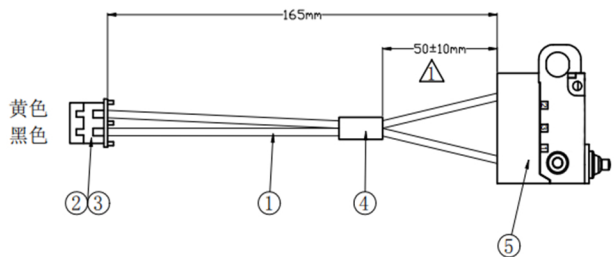
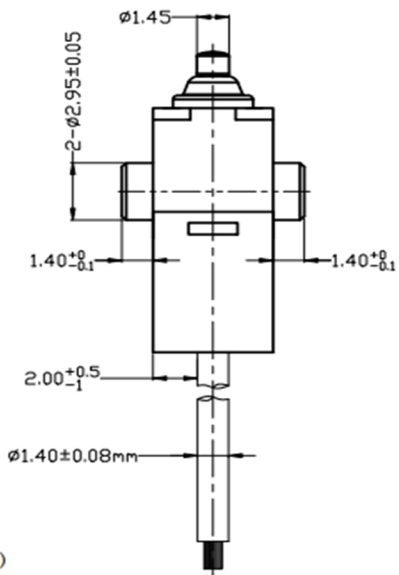



CAD GENERATED DRAWING. DON' T CHANGE BY HAND.

Circuit Diagram

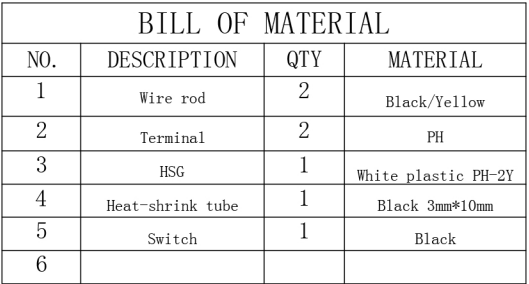

CHARACTERISITICS


Operating Force	130gf Max
Pre Travel	0.8mm Max
Release Force	13gf Min
Operation Position	6.75±0.2mm
Movement-Differential	0.20mm Max
Over Travel	0.8mm Min

ELECTRICAL DATA

CONTACT ARRANGEMENT S. P. S. T-NO	SWITCH SEALING IP67
Ratings	
0. 1A 48VDC 125/250VAC 3A 12VDC μ40T85 1E5	

X. ± 0.50	X. ° $\pm 2^{\circ}$
.X ± 0.30	.X ° $\pm 1^{\circ}$
.XX ± 0.10	.XX ° $\pm 0.5^{\circ}$
.XXX ± 0.05	

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF YUYUAN
TECHNOLOGY CO.,LTD
AND SHALL NOT BE REPRODUCED,
COPIED OR USED IN ANY MANNER WITHOUT
THE PRIOR WRITTEN CONSENT OF
YUYUAN TECHNOLOGY CO.,LTD

 YIYUAN		深圳市怡远科技有限公司 SHENZHEN YIYUAN TECHNOLOGY CO., LTD			
PART NO. YTD-303-6072		TITLE: DETECT SWITCH			
APPD: ROGER		DWG NO. : YTD-303-6072			
CHKD: ROC					
DR: BILLY WANG 2020/08/21			SCALE	SHEET	REV.
		1/1	1/1	A1	