
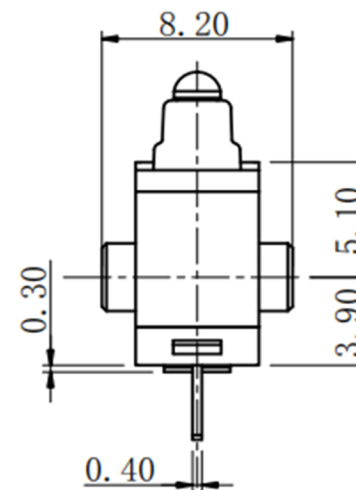


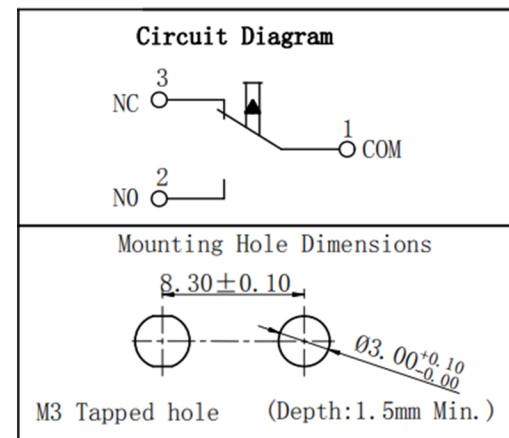

Operating Force	150gf MAX
Release Force	20gf MIN
Free Position	9.2mm MAX
Operation Position (NC)	8.7±0.3mm
Operation Position (NO)	8.4±0.3mm
Movement-Differential	0.2mm MIN
Total Travel Position	6.1mm MAX

ELECTRICAL DATA		X. ± 0.50	X.° $\pm 2^\circ$	UNITS	 YIYUAN	深圳市怡远科技有限公司				
CONTACT ARRANGEMENT	SWITCH SEALING	.X ± 0.30	.X° $\pm 1^\circ$	mm		SHENZHEN YIYUAN TECHNOLOGY CO.,LTD				
S. P. D. T	IP67	.XX ± 0.10	.XX° $\pm 0.5^\circ$	MAT'L	PART NO.		TITLE:			
Ratings		.XXX ± 0.05			YTD-306-150S00AA		TACTILE SWITCH			
30V DC 0.1A	0.1A	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF YIYUAN TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF YIYUAN TECHNOLOGY CO.,LTD		FINISH	APPD: ROGER		DWG NO. : YTD-306-150S00AA			
				Q' TY	CHKD: ROC					
14V DC 10mA	10mA				DR: BILLY WANG 2020/08/21			SCALE	SHEET	REV.
							1/1	1/1	A1	