
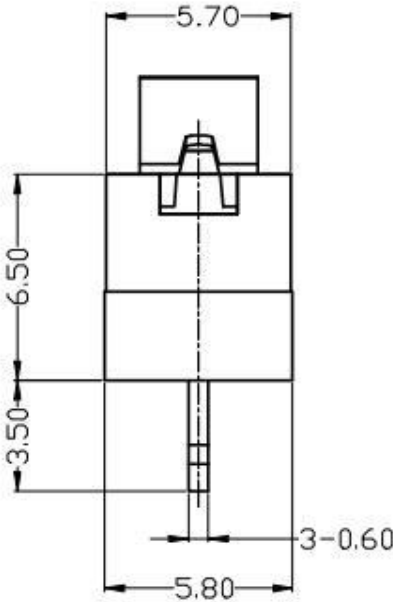
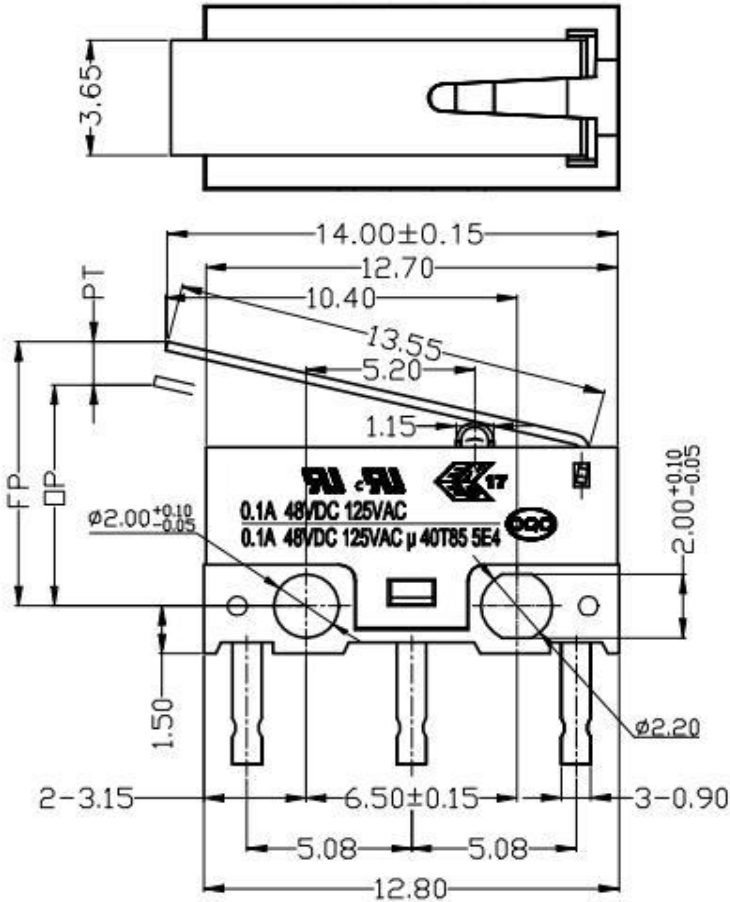




CHARACTERISITICS

Operating Force	50gf MAX
Release Force	8gf MIN
Operation Position	6.3±0.9mm
Pre Traval	3.4mm MAX
Differential Travel	0.8mm MAX
Over Travel	0.3mm MIN
Free Position	8.8MM MAX

ELECTRICAL DATA		X. ±0.50	X.° ± 2°	UNITS mm		深圳市怡远科技有限公司 SHENZHEN YIYUAN TECHNOLOGY CO.,LTD			
CONTACT ARRANGEMENT S.P.D.T		.X ±0.30	.X° ± 1°						
Ratings		.XX ±0.10	.XX° ± 0.5°	MAT'L	PART NO. YTD-10P1-150P02A		TITLE: TACTILE SWITCH		
		.XXX ± 0.05							
0.1A 48VDC 125VAC 0.1A 48VDC 125VAC μ 40T85 5E4		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF YIYUAN TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF YIYUAN TECHNOLOGY CO.,LTD		FINISH	APPD: ROGER		DWG NO. : YTD-10P1-150P02A		
				Q'TY	CHKD: ROC		 SCALE 1/1 SHEET 1/1 REV. A1		
					DR: BILLY WANG 2020/08/21				