


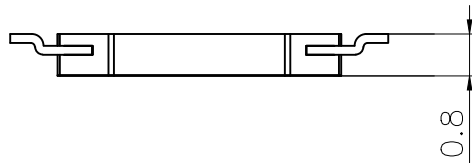




RoHS

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

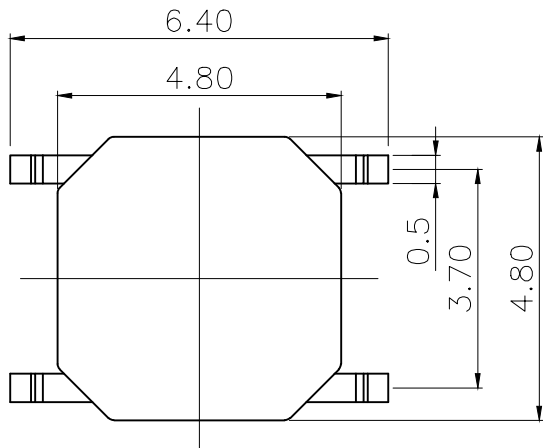

CIRCUIT DIAGRAM

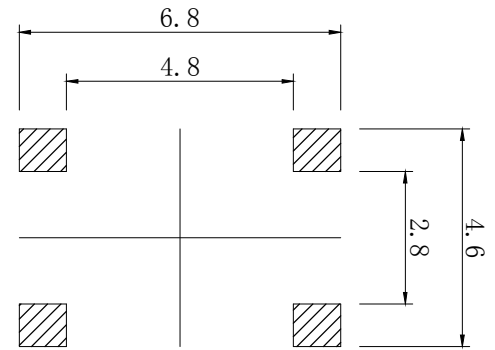


PCB.WELDING DRAWING

Specification

Rate voltage,current	50mA DC12V
Contact resistance	≤100mΩ
Operating force	250gf
Travel	0.20±0.10mm
Insulated resistance	≥100MΩ
Dielectric strength	≥250VAC/1min
Life cycle	≥100000次

ITEM	PART NAME	Q' TY	MATERIAL	FINSH/COLOR
4	Dust film	1	Polyimide	Yellwo
3	Shrapnel	1	Stainless steel	Silver
2	Housing	1	PPA	Black
1	Cards	1	Brass	Silver

X. ±0.50	X. ° ± 2°	UNITS		深圳市怡远科技有限公司 SHENZHEN YIYUAN TECHNOLOGY CO.,LTD								
.X ±0.30	.X° ± 1°	mm										
.XX ±0.10	.XX° ± 0.5°	MAT'L	PART NO. YTS-C003-2	TITLE: TACTILE SWITCH								
.XXX ±0.05												
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF YIYUAN TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF YIYUAN TECHNOLOGY CO.,LTD			APPD: ROGER	DWG NO. : YTS-C003-2								
			CHKD: ROC									
			Q' TY	DR: BILLY WANG 2020/08/21								
			<table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1/1</td><td>1/1</td><td>A1</td></tr></table>				SCALE	SHEET	REV.	1/1	1/1	A1
SCALE	SHEET	REV.										
1/1	1/1	A1										