


RoHS

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.

REV.	ECN. NO.	APPD.

H			
A	1.5	B	1.7
C	2.0	D	2.3
E	2.5	F	3.0
G	3.5	H	4.0
I	4.3	J	4.5
K	5.0		



A

B

C

D

E





A

B

C

D

E

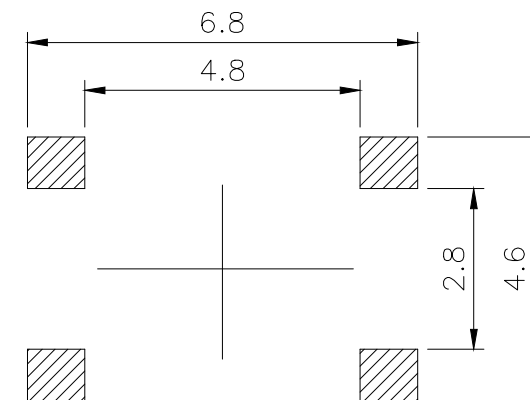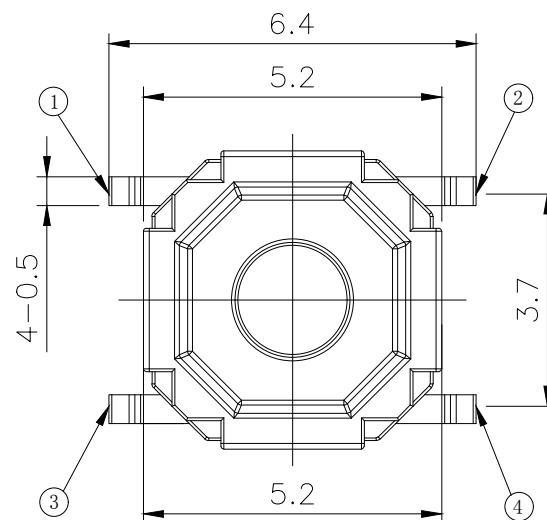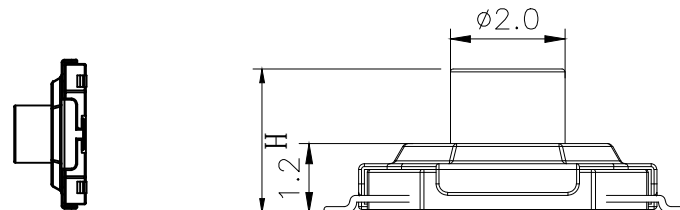

PCB. WELDING DRAWING

Specification

Rate voltage,current	50mA DC12V
Contact resistance	$\leq 100\text{m}\Omega$
Operating force	160 $\pm$ 50gf
Travel	0.20 $\pm$ 0.10mm
Insulated resistance	$\geq 100\text{M}\Omega$
Dielectric strength	$\geq 250\text{VAC}/1\text{min}$
Life cycle	≥ 100000 次

ITEM	PART NAME	Q' TY	MATERIAL	FINSH/COLOR
6	Button	1	Plastic	PPA
5	Cover	1	Stainless steel	Cleaning
4	Dust film	1	Polyimide	Orange
3	Shrapnel	1	Stainless steel	Silver
2	Housing	1	PPA	Black
1	Cards	1	Brass	Silver

X. ± 0.50	X.° $\pm 2^\circ$	UNITS
.X ± 0.30	.X° $\pm 1^\circ$	mm
.XX ± 0.10	.XX° $\pm 0.5^\circ$	MAT'L
.XXX ± 0.05		FINISH
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF YIYUAN TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF YIYUAN TECHNOLOGY CO.,LTD.		Q' TY



深圳市怡远科技有限公司
SHENZHEN YIYUAN TECHNOLOGY CO.,LTD

PART NO.
YTS-C005P-3H

TITLE:
TACTILE SWITCH

APPD: ROGER
CHKD: ROC

DWG NO. :
YTS-C005P-3H

DR: BILLY WANG 2020/08/21



SCALE	SHEET	REV.
1/1	1/1	A1