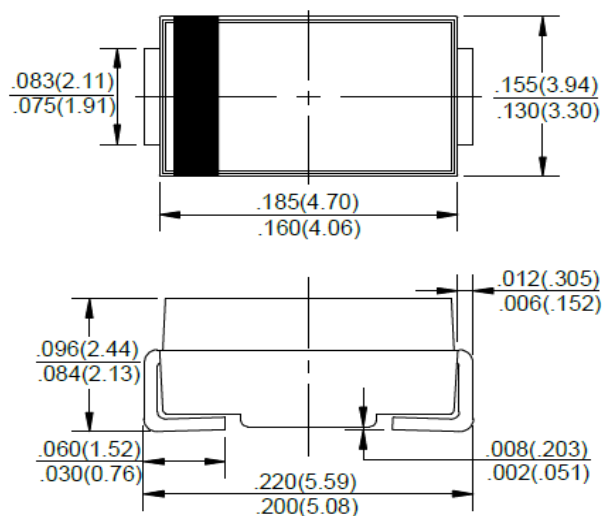



**FEATURES**

- Schottky barrier rectifier
- Guardring protection
- Low forward voltage
- Reverse energy tested
- High current capability
- Extremely low thermal resistance

**MECHANICAL DATA**

- Case: SMB molded plastic body
- Polarity: Color band denotes cathode end
- Mounting position: ANY
- Weight: 0.003 ounces, 0.093 gram

**SMB ( DO-214AA )**


Dimensions in inches and (millimeters)


**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified


Device marking code		SS22	SS23	SS24	SS25	SS26	SS28	SS29	S210	UNITS	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	90	100	V	
Maximum RMS voltage	$V_{RWS}$	14	21	28	35	42	56	63	70	V	
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	90	100	V	
Maximum average forward rectified current at $T_L=90^\circ\text{C}$	$I_{F(AV)}$	2.0								A	
Peak forward surge current 8.3ms single half-sine-wave	$I_{FSM}$	75								A	
Maximum instantaneous forward voltage at $I_{FM}=2.0\text{A}$ (NOTE1)	$V_F$	0.50			0.75		0.85			V	
Maximum DC reverse current $T_J=25^\circ\text{C}$ at rated DC blocking voltage $T_J=125^\circ\text{C}$	$I_R$	0.4					0.03				mA
		10					5.0				
Maximum thermal resistance	$R_{\theta JL}$	28								°C/W	
Operating temperature range	$T_J$	-55 ---- +125								°C	
Storage temperature range	$T_{STG}$	-55 ---- +150								°C	

NOTE: 1.Pulse test: Pulse width 300us,duty cycle 1 %


**FIG.1 – FORWARD DERATING CURVE**

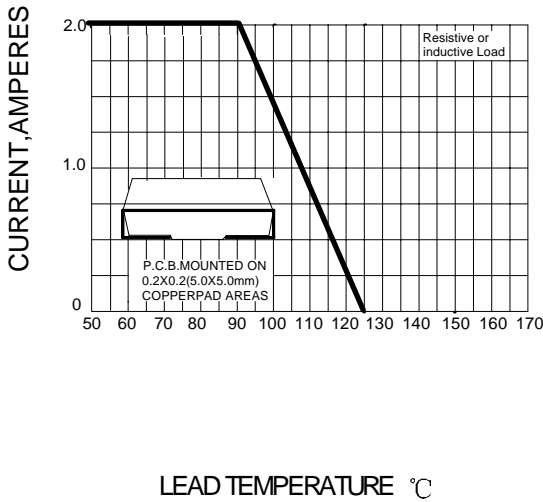

**FIG.2– PEAK FORWARD SURGE CURRENT**

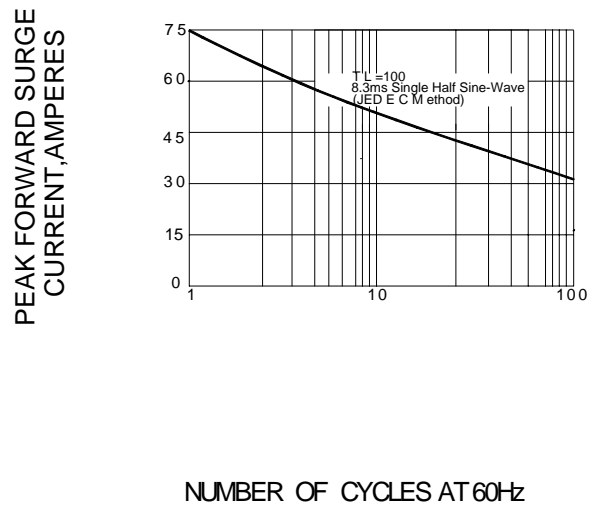

**FIG.3 – TYPICAL FORWARD CHARACTERISTICS**

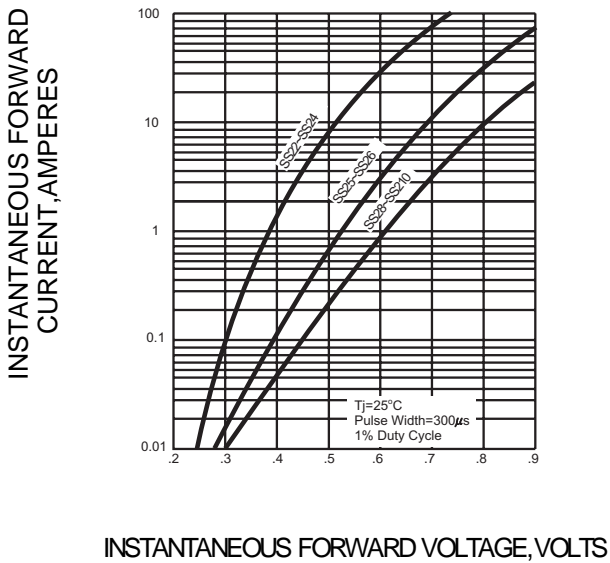

**FIG.4 – TYPICAL REVERSE CHARACTERISTICS**

