


Kinghelm®

KHA(RG1.13)-TX120-IPEX

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN	James		9/26

120mm±5mm

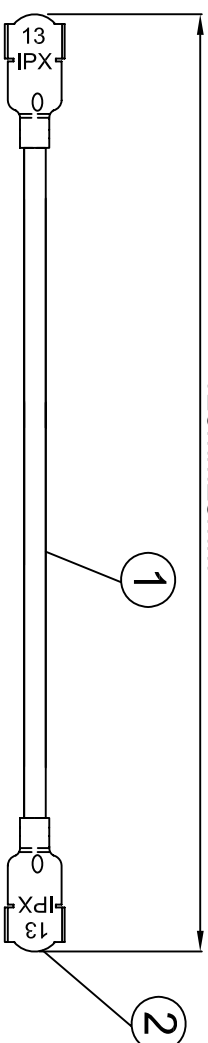

L1	50±1
L2	60±1
L3	120±1

NOTES:

1. ELECTRICAL:

- 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
- 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
②	端子	高仿IPEX 1.13端子, 镀金	1
①	同轴线	RF1.13灰色同轴线, OD:1.13mm	AS

深圳市金航标电子有限公司

ALL DIMENSION ARE IN MM		DRAWN	DATE	TITLE	
CHKD.	James	2019-06-01	IPEX TO IPE-X		
APPD.	Frank	2019-06-01			
COMPUTER GENERATED IN SOLIDWORKS DO NOT SCALE THIS DRAWING		Scott	2019-06-01		
PROJECTION		GENERAL TOLERANCE FOR ANGLES XX.XXX XXXX ±1° ±0.3 ±0.25 ±0.150		SCALE:Free	

CUSTOMER PIN:

4

3

2

1

A

B

C

D

A

B

C

D