


# Kinghelm®

KHA(RG1.13)-TX150-IPEX

REV. NUMBER		DESCRIPTION		DWN	CHK	DATE
A		DESIGN		James		9/26

150mm±5mm

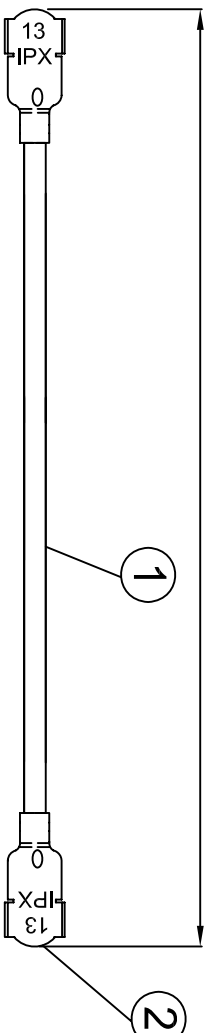

L1	50±1
L2	60±1
L3	120±1

NOTES:

- ELECTRICAL:
  - VOLTAGE RATING:DCV 300V 10MS
  - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
  - INSULATION RESISTANCE: 5.0M OHM/MIN.
  - THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
  - SEE TABLE
- ALL COMPONENTS ARE ROHS COMPLIANT.

## 深圳市金航标电子有限公司

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
①	端子	高仿IPEX 1.13端子, 镀金	1
②	同轴线	RF1.13灰色同轴线, OD:1.13mm	AS

ALL DIMENSION ARE IN MM		DRAWN	DATE	TITLE	
COMPUTER GENERATED IN SOLUTIONS DO NOT SCALE THIS DRAWING		James	2019-06-01	IPEX TO IPE-X	
PROJECTION		CHKD. Frank	2019-06-01	SIZE	DWG Number.
GENERAL TOLERANCE FOR ANGLES XX.XXX XXXX ±1° ±0.3 ±0.25 ±0.150		APPD. Scott	2019-06-01	B	
CUSTOMER PIN:				SCALE:Free	TYPE
					SHEET 1 OF 1

4

3

2

1

A

B

C

D

A

B

C

D