



ENOD4-D BOX

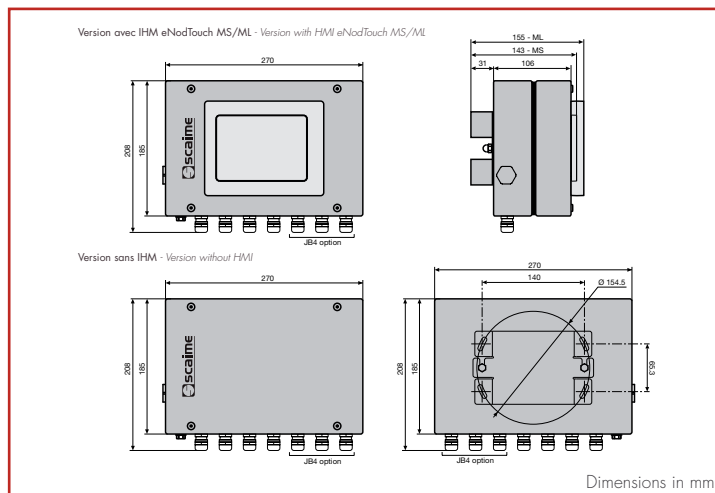

Filling, Batch dosing


- IP65 Stainless steel housing
- Up to 8 strain gage load cells (4/6 wires)
- Function: Batch dosing, filling and unloading
- Certification according to OIML R76, R61
- 2 digital inputs (4 with IO+ version) and 4 outputs
- Analog output 0-10 V or 4-20 mA (IO+ version)
- USB link for PC and RS485 link for HMI eNodTouch
- Optional Bluetooth communication

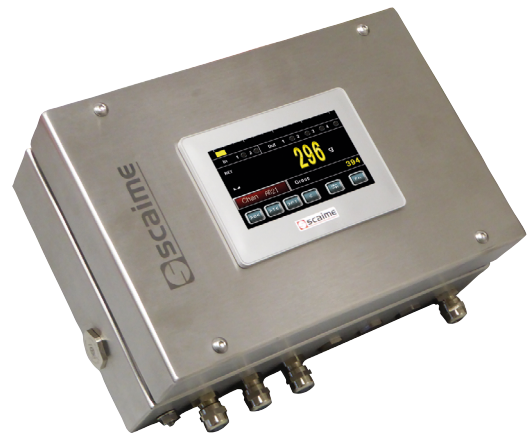

Power supply: 10 ... 28 Vdc
 Admissible input signal: 0 ... 7.8 mV/V
 Accuracy class: 0.005 %
 Max. resolution: $\pm 500\,000$ pts
 Internal resolution: 24 bits
 Conversion rate: 6.25 ... 1 600 meas./s.
 Warranty: 1 year

Interfaces diagram

EtherNet Versions

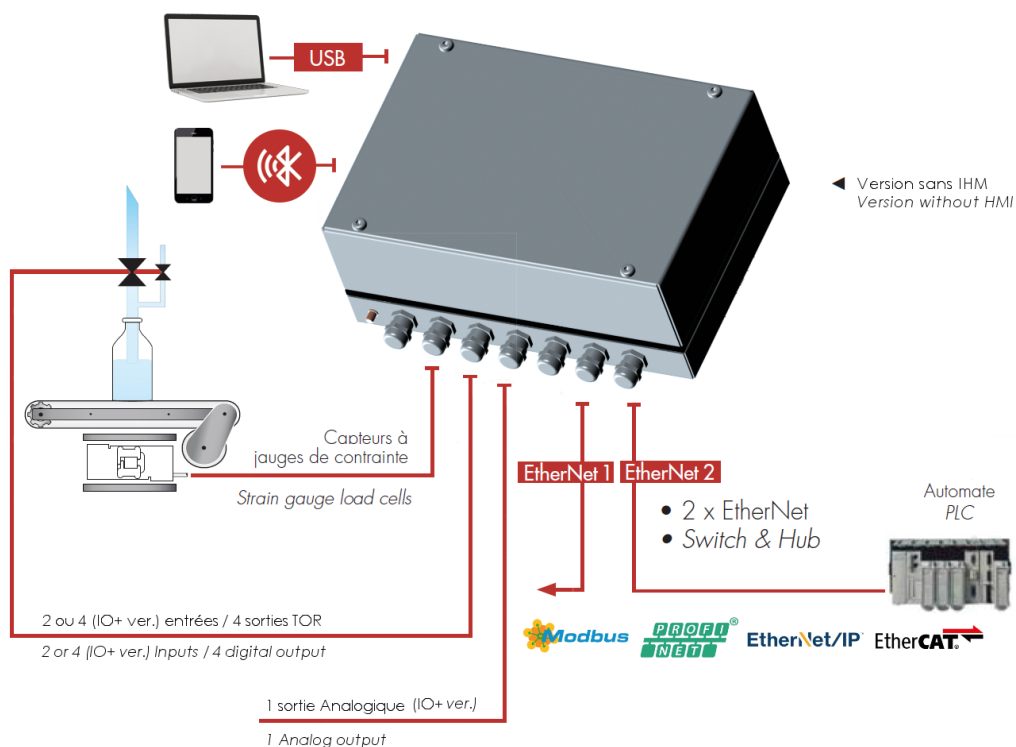

CAN/RS485/PROFIBUS® available versions