

APPLICATION:

multi-cell scales

CAPACITY RANGE:

15kg - 25kg - 30kg - 50kg - 75kg - 100kg - 150kg - 300kg - 200kg - 250kg - 500kg - 750 kg - 1000kg - 1500 kg

MATERIAL:Stainless Steel

ENVIRONMENTAL PROTECTION:IP68

APPROVALS:According to OIML R60

应用：

称重范围： 15kg - 25kg - 30kg - 50kg - 75kg - 100kg - 150kg - 300kg - 200kg - 250kg - 500kg - 750 kg - 1000kg - 1500 kg

材质： 不锈钢

保护等级： IP68

认证： According to OIML R60

CHARACTERISTICS

Construction using stainless steel. The laser soldered closing protects from the typical environment in food and chemical industry. Mounting compatibility.

特征

产品采用不锈钢材质。激光焊接密封技术，可以在复杂环境中应用，如工业和化工行业。拥有更多的兼容性。

APPLICATIONS

The CFSIF model is manufactured to maintain its performance capabilities in the environmental conditions existing in industries, where tasks and cleaning demand a good environmental protection.

用途

CFSIF 型是为适用于复杂的现场环境下制造的，在这些复杂的条件下产品都能保持良好的性能。

OPTIONS

Length of the cable is optional.

Hostile environmental cable.

ATEX option EC-Type examination certificate CEC 11 ATEX 040 X according directive 94/9/EC

II 1G EExia IIC T6 (Ta2-0++40°C)
TX (Ta-20++65°C)



II 1d TD A20 TX°C (Ta-20++40°C)
TX°C (Ta-20++65°C)

For more information look up the EC-type examination certificate, and documentation. Consult for special requirements.

可选项


电缆的长度是可选的。电缆对环境的适用是可选的。防爆可选 .EC 型式测试证书 根据指令 94/9/EC

了解更多信息可查阅 EC 型式测试证书和文档。特殊要求可咨询。



TEFLÓN® protects all the internal cables

特氟龙® 保护所有内部电缆

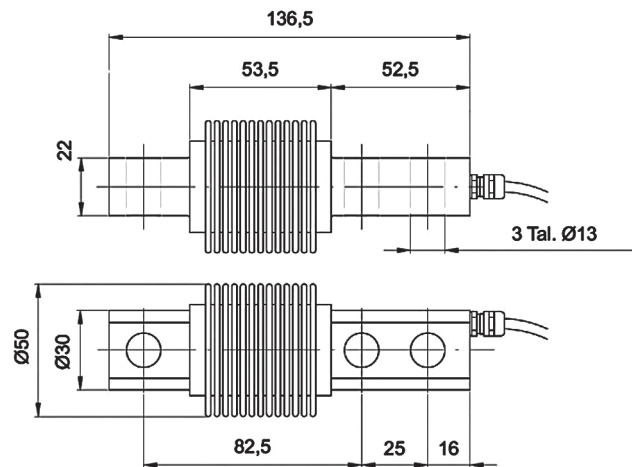

Dimensions in mm 尺寸为毫米

