




Features

- ◇ Designed for use in switching power supplies, inverters and as free wheeling diodes
- ◇ High efficiency, low VF
- ◇ High reliability
- ◇ Ultrafast recovery time for high efficiency
- ◇ 175°C operating junction temperature

Mechanical Data

- ◇ Cases: Molded plastic
- ◇ Epoxy: UL 94V-0 rate flame retardant
- ◇ Polarity: Color band denotes cathode
- ◇ High temperature soldering guaranteed:
260 °C /10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ◇ Weight: 0.34 grams

DO-15

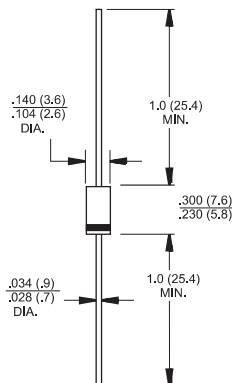

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	MUR160	MUR190	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	600	900	V
Maximum RMS Voltage	V_{RMS}	420	630	V
Maximum DC Blocking Voltage	V_{DC}	600	900	V
Maximum Average Forward Rectified Current (Square Wave Note 4) @ $T_A=80^\circ\text{C}$	$I_{(AV)}$	1.0		A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	35		A
Maximum Instantaneous Forward Voltage @ 1.0A $T_j=150^\circ\text{C}$ $T_j=25^\circ\text{C}$	V_F	1.05 1.25	1.5 1.7	V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	I_R	5.0 150		μA μA
Maximum Reverse Recovery Time (Note 2)	T_{rr}	50	75	nS
Typical Junction Capacitance (Note 1)	C_j	27	15	pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	50		$^\circ\text{C}/\text{W}$
Operating Temperature Range	T_J	-65 to +175		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +175		$^\circ\text{C}$

- Notes:
1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.
 2. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$
 3. Thermal Resistance from Junction to Ambient, with units Mounted on P.C. Board with 0.2" x 0.2" Copper Surface.
 4. Pulse Test: Pulse Width = 300 μs , Duty Cycle < 2.0%.

RATINGS AND CHARACTERISTIC CURVES (MUR160 THRU MUR190)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

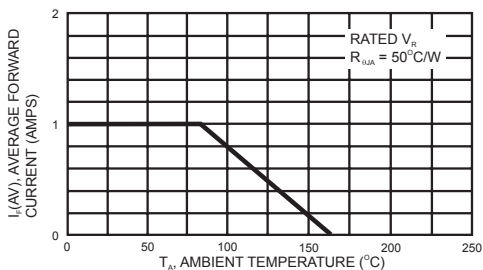


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

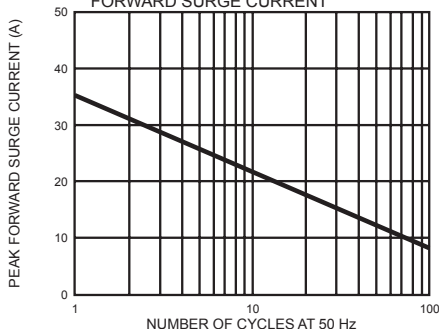


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

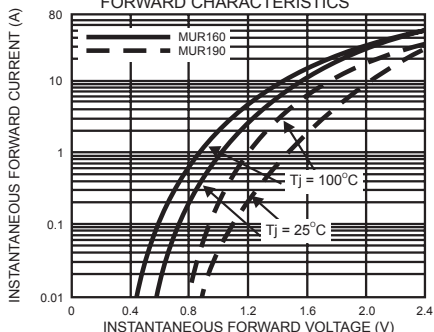


FIG.4- TYPICAL REVERSE LEAKAGE CHARACTERISTICS

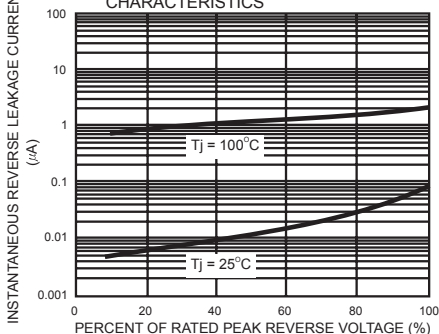


FIG.5- TYPICAL JUNCTION CAPACITANCE


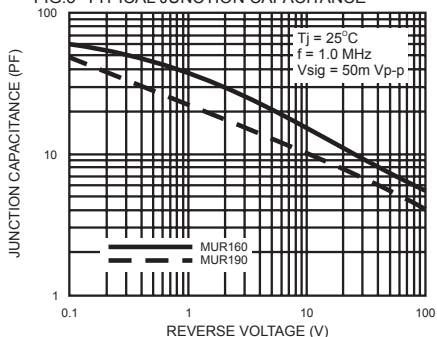


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

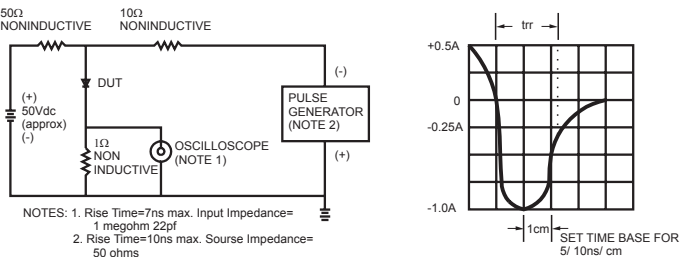

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-15	3000/AMMO	30000	42X28X31	12.00	10.00