

**APPLICATION:** Weighbridges and silos

**CAPACITY RANGE:**

10t - 15, 120t - 20t - 25t - 30t

**MATERIAL:** Stainless steel

**ENVIRONMENTAL PROTECTION:** IP68

**APPROVALS:**

CE 3000 & 4000 Div - E.03.02.C09

According to OIML - R60

**应用:** 汽车衡和仓秤

**称重范围:** 10t-15, 120t-20t-25t-30t

**材质:** 不锈钢

**保护等级:** IP68

**认证:** CE 3000 & 4000 Div - E.03.02.C09

According to OIML - R60

### CHARACTERISTICS

Construction using stainless steel.

The laser soldered closing protects from the typical environment in food and chemical industry. Mounting compatibility.

#### 特征

产品采用不锈钢材质，激光焊接密封技术，可以在复杂环境中应用，如工业和化工行业。拥有更多的兼容性。

### APPLICATIONS

The CBCI model belongs to the double shear beam type. It has excellent linearity and supports the intensive traffic of trucks. It's protected from the environmental conditions existing in industries, where tasks and cleaning demand.

#### 用途

CBCI 型为双剪梁型，具有良好的线性度，支持密集的货车交通。它不受工业中存在的环境条件的影响。

### OPTIONS

Length of the cable is optional.

Hostile environmental cable.

ATEX option

EC-Type examination certificate CEC 11

ATEX 040 X according directive 94/9/EC

II 1G EExia IIC T6 (Ta-20++40°C)

TX (Ta-20++65°C)

II 1D tD A20 TX°C (Ta-20++40°C)

TX°C (Ta-20++65°C)

For more information look up the EC-type examination certificate, and documentation. Consult for special requirements.





#### 可选项

电缆的长度是可选的。电缆对环境的适用是可选的。防爆可选。EC型式测试证书

根据指令 94/9/EC


了解更多信息可查阅EC型式测试证书和文档。

特殊要求可咨询。



TEFLÓN® protects all the internal cables

特氟龙® 保护所有内部电缆

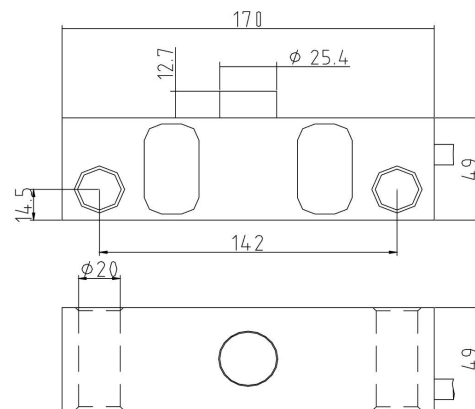

Dimensions in mm 尺寸为毫米

