

APPLICATION:

Electronic hooks, Suspended deposits, Hybridizations

CAPACITY RANGE:

15kg - 30kg - 50kg - 100kg - 300kg - 500kg - 1t

MATERIAL:Stainless steel

ENVIRONMENTAL PROTECTION:IP67

APPROVALS:

CE 3000 Div – E-12.02.C08 From 210 kg up to 1050kj According to OIML - R60

应用：电子挂钩、悬浮沉淀

称重范围：15kg - 30kg - 50kg - 100kg - 300kg - 500kg - 1t

材质：不锈钢

保护等级：IP67

认证：CE 3000 Div – E-12.02.C08 From 210 kg up to 1050kj According to OIML - R60

CHARACTERISTICS

Construction using special steel. High quality protection barrier using special silicones. Mounting compatibility.

特征

产品采用不锈钢材质。
使用特殊有机硅的高质量防护屏障。
拥有更多的兼容性。

APPLICATIONS

The TC model is manufactured to maintain its performance capabilities in the environmental conditions existing in industries, where tasks and cleaning demand a good environmental protection.

用途




TC 型是为适用于复杂的现场环境下制造的，在这些复杂的条件下产品都能保持良好的性能。

OPTIONS

Sensitivity alignment: $\pm 0,1\%$. Consult for special requirements.

可选项

灵敏度对准： $\pm 0.1\%$ 。
特殊要求可咨询。

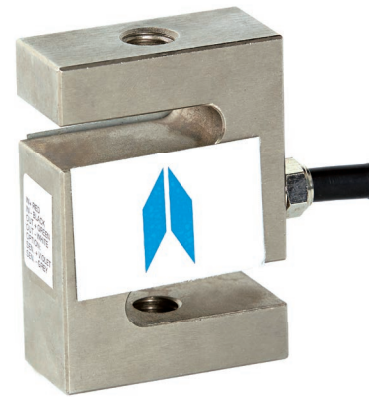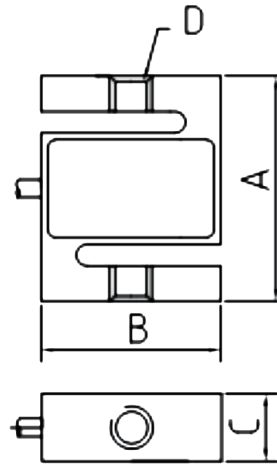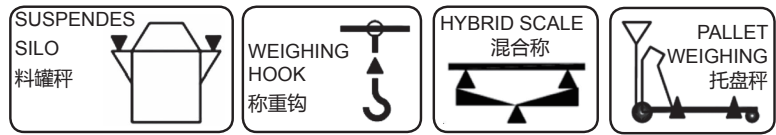

TEFLÓN® protects all the internal cables

特氟龙® 保护所有内部电缆

Capacity	A	B	C	D
15 to 50	64	51	13	M8
100 to 500	76	51	19	M12
1000	76	54	25.4	M12

Dimensions in mm 尺寸为毫米

