

Features


- ◆ Glass passivated chip
- ◆ Maximum 400 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle):0.01%
- ◆ Low leakage
- ◆ Uni polar unit
- ◆ Excellent clamping capability
- ◆ Very fast response time
- ◆ RoHS compliant

Mechanical Data

- ◆ Case: Molded plastic
- ◆ Epoxy: UL 94V-0 rate flame retardant
- ◆ Lead: Solderable per MIL-STD-750, method 2026
- ◆ Polarity: Color band denotes cathode end
- ◆ Mounting position: Any

Working Voltage: 5.0 to 85V

Peak Pulse Power: 400 W

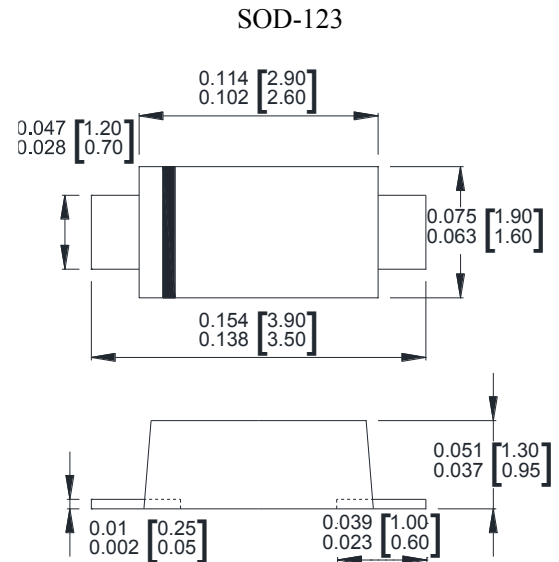

Dimensions : inch [mm]

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak power dissipation with a 10/1000 μ s waveform ⁽¹⁾⁽³⁾	P _{PP}	400	W
Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾	I _{PP}	See Next Table	A
Power dissipation on infinite heatsink at $T_L = 75^\circ\text{C}$	P _D	1.0	W
Peak forward surge current, 8.3 ms single half sine-wave unidirectional only ⁽²⁾	I _{FSM}	30	A
Maximum instantaneous forward voltage at 25 A for unidirectional only	V _F	3.5	V
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C

Note:

(1)Non-repetitive current pulse per Fig.3 and derated above $T_A=25^\circ\text{C}$ per Fig.1.

(2)Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

(3)SMF4L5.0A~SMF4L9.0A Peak Pulse Power Dissipation is 370W min, 400W typical @10/1000 μ s

Ratings and Characteristics Curves ($T_A=25^\circ\text{C}$ unless otherwise specified)

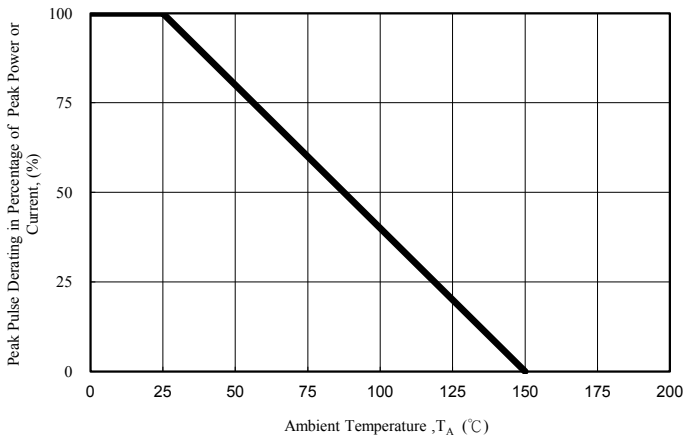


Fig. 1 - Pulse Derating Curve

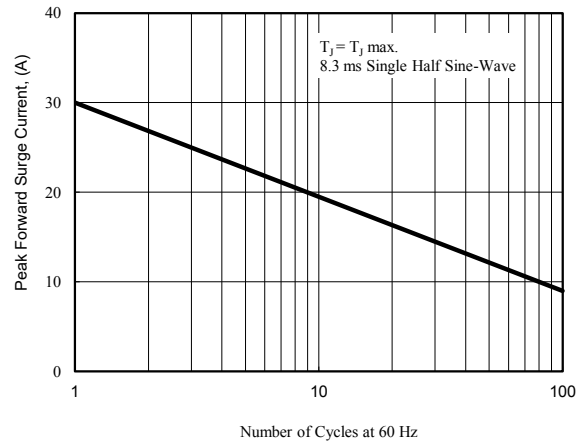


Fig. 2 - Maximum Non-Repetitive Surge Current

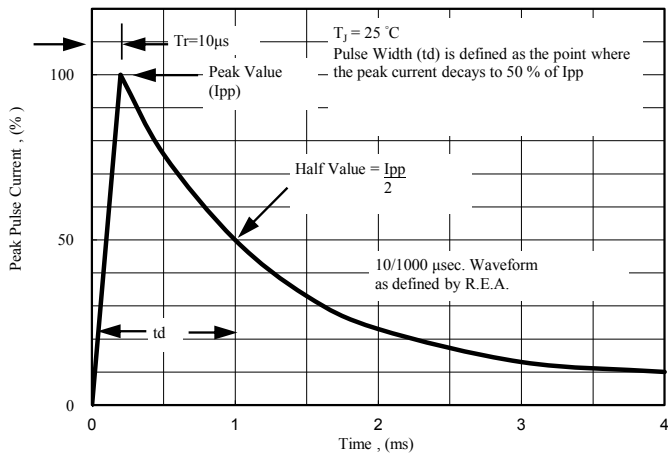


Fig. 3 - Pulse Waveform

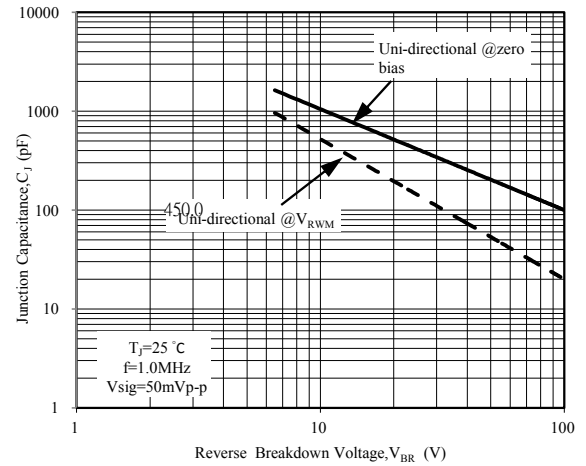


Fig. 4 - Typical Junction Capacitance

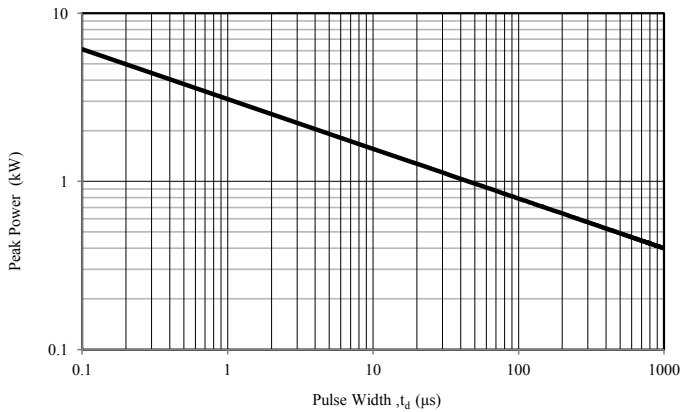


Fig. 5 - Steady State Power Derating Curve

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

Part Number (Uni)	Device Marking Code	Breakdown Voltage V_{BR} @ I_T			Maximum Reverse Leakage I_R @ V_{RWM} (μA)	Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Surge Current I_{PP} (A)	Maximum Clamping Voltage V_C @ I_{PP} (V)
		Min (V)	Max (V)	I_T (mA)				
SMF4L5.0A	KE	6.40	7.00	10	800	5.0	40.1	9.2
SMF4L6.0A	KG	6.67	7.37	10	800	6.0	35.9	10.3
SMF4L6.5A	KK	7.22	7.98	10	500	6.5	33.1	11.2
SMF4L7.0A	KM	7.78	8.60	10	200	7.0	30.9	12.0
SMF4L7.5A	KP	8.33	9.21	1	100	7.5	28.7	12.9
SMF4L8.0A	KR	8.89	9.83	1	50	8.0	27.2	13.6
SMF4L8.5A	KT	9.44	10.40	1	20	8.5	25.7	14.4
SMF4L9.0A	KV	10.00	11.10	1	10	9.0	24.1	15.4
SMF4L10A	KX	11.10	12.30	1	5	10.0	23.5	17.0
SMF4L11A	KZ	12.20	13.50	1	1	11.0	22.0	18.2
SMF4L12A	LE	13.30	14.70	1	1	12.0	20.1	19.9
SMF4L13A	LG	14.40	15.90	1	1	13.0	18.6	21.5
SMF4L14A	LK	15.60	17.20	1	1	14.0	17.2	23.2
SMF4L15A	LM	16.70	18.50	1	1	15.0	16.4	24.4
SMF4L16A	LP	17.80	19.70	1	1	16.0	15.4	26.0
SMF4L17A	LR	18.90	20.90	1	1	17.0	14.5	27.6
SMF4L18A	LT	20.00	22.10	1	1	18.0	13.7	29.2
SMF4L20A	LV	22.20	24.50	1	1	20.0	12.3	32.4
SMF4L22A	LX	24.40	26.90	1	1	22.0	11.3	35.5
SMF4L24A	LZ	26.70	29.50	1	1	24.0	10.3	38.9
SMF4L26A	ME	28.90	31.90	1	1	26.0	9.5	42.1
SMF4L28A	MG	31.10	34.40	1	1	28.0	8.8	45.4
SMF4L30A	MK	33.30	36.80	1	1	30.0	8.3	48.4
SMF4L33A	MM	36.70	40.60	1	1	33.0	7.5	53.3
SMF4L36A	MP	40.00	44.20	1	1	36.0	6.9	58.1
SMF4L40A	MR	44.40	49.10	1	1	40.0	6.2	64.5
SMF4L43A	MT	47.80	52.80	1	1	43.0	5.8	69.4
SMF4L45A	MV	50.00	55.30	1	1	45.0	5.5	72.7
SMF4L48A	MX	53.30	58.90	1	1	48.0	5.2	77.4
SMF4L51A	MZ	56.70	62.70	1	1	51.0	4.9	82.4
SMF4L54A	NE	60.00	66.30	1	1	54.0	4.6	87.1
SMF4L58A	NG	64.40	71.20	1	1	58.0	4.3	93.6
SMF4L60A	NK	66.70	73.70	1	1	60.0	4.1	96.8
SMF4L64A	NM	71.10	78.60	1	1	64.0	3.9	103.0
SMF4L70A	NP	77.80	86.00	1	1	70.0	3.5	113.0
SMF4L75A	NR	83.30	92.10	1	1	75.0	3.3	121.0
SMF4L78A	NT	86.70	95.80	1	1	78.0	3.2	126.0
SMF4L85A	NV	94.40	104.00	1	1	85.0	2.9	137.0