

**Techfuse**  
**PTC Devices**  
 Resettable Fuse

PRODUCT: SMD0805 series  
 DOCUMENT: QR0429  
 ECN. NO.:  
 REV LETTER:  
 REV DATE: 2015/1/12  
 PAGE NO.: 1 of 1


## Specification Sheet

Terminal Pad Solderability:  
 Meets EIA Specification RS186-9E  
 And ANSI/J-STD-002 Category 3.

Terminal Pad Materials:  
 Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

Marking:  
 Part Identification  
 1 = 010

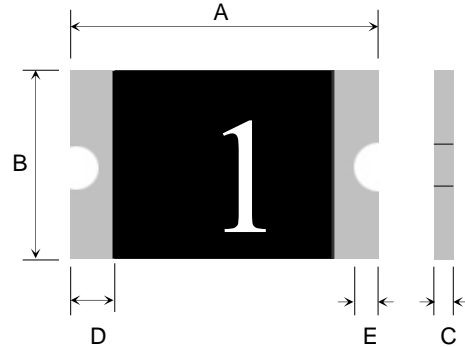

**TABLE I. DIMENSIONS:**

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD0805-005	V	1.90	2.20	1.20	1.50	0.50	1.00	0.20	0.10
SMD0805-010	1	1.90	2.20	1.20	1.50	0.50	1.00	0.20	0.10
SMD0805-020	2	1.90	2.20	1.20	1.50	0.50	1.00	0.20	0.10
SMD0805-025	2	1.90	2.20	1.20	1.50	0.50	1.00	0.20	0.10
SMD0805-035	3	1.90	2.20	1.20	1.50	0.50	1.00	0.20	0.10
SMD0805-050	5	1.90	2.20	1.20	1.50	0.50	1.10	0.20	0.10
SMD0805-075	7	1.90	2.20	1.20	1.50	0.50	1.10	0.20	0.10
SMD0805-100	0	1.90	2.20	1.20	1.50	0.50	1.10	0.20	0.10
SMD0805-110	0	1.90	2.20	1.20	1.50	0.50	1.10	0.20	0.10
SMD0805-125	12	1.90	2.20	1.20	1.50	0.50	1.20	0.20	0.10

Unit:mm

**TABLE II. PERFORMANCE RATINGS:**

Model	Marking	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	I <sub>hold</sub> @25°C (A)	I <sub>trip</sub> @25°C (A)	P <sub>d</sub> Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	R <sub>i min</sub> (Ω)	R <sub>1 max</sub> (Ω)
SMD0805-005	V	15.0	100	0.05	0.20	0.50	0.5	1.50	2.000	10.000
SMD0805-010	1	15.0	100	0.10	0.30	0.50	0.5	1.50	1.000	6.000
SMD0805-020	2	9.0	100	0.20	0.50	0.50	8.0	0.02	0.650	3.500
SMD0805-025	2	9.0	100	0.25	0.55	0.50	8.0	0.02	0.600	3.000
SMD0805-035	3	6.0	100	0.35	0.75	0.50	8.0	0.10	0.250	1.200
SMD0805-050	5	6.0	100	0.50	1.00	0.50	8.0	0.10	0.150	0.850
SMD0805-075	7	6.0	40	0.75	1.50	0.60	8.0	0.20	0.090	0.385
SMD0805-100	0	6.0	100	1.00	1.95	0.60	8.0	0.30	0.060	0.230
SMD0805-110	0	6.0	100	1.10	2.20	0.60	8.0	0.30	0.060	0.210
SMD0805-125	12	6.0	100	1.25	2.50	1.50	8.0	0.60	0.030	0.140

### Order Information

### Packaging

SMD0805	020	-24V	Tape & Reel Quantity
Product name	Hold	Max	005, 010, 020, 025, 035, 050 5,000 pcs/reel
Size 2012 mm / 0805 mils	Current	voltage	075, 100, 110, 125 4,000 pcs/reel
SMD: surface mount device	0.20A		

Recognition: SMD0805-020~100 : UL Approved.  
 SMD0805-010, 125 : UL Pending.

E201504/E319079 SMD0805-100 :TÜV, Approved. R50141892

