





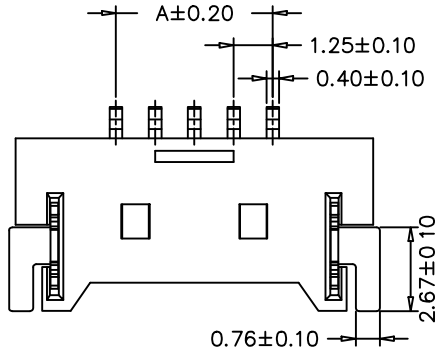





REV.	ECN NO OR DESCRIPTION	REVISED	DATE



NOTE:
 Current rating: 1A AC,DC
 Voltage rating: 125V AC,DC
 Temperature range: -25°C~+85°C
 Insulation resistance: 100MΩ/Min
 Withstanding voltage: 500V AC/minute
 Contact resistance: 20mΩ/Max
 PIN: Brass/Gold-Plated
 Suitable With: A1254HF Series Housing

TABLE:

CSG PART NO.	Dimension mm	
	A	B
WAFER-125CB-2A	1.25	7.65
WAFER-125CB-3A	2.54	8.90
WAFER-125CB-4A	3.75	10.15
WAFER-125CB-5A	5.00	11.30
WAFER-125CB-6A	6.25	12.65
WAFER-125CB-7A	7.50	13.90
WAFER-125CB-8A	8.75	15.15
WAFER-125CB-9A	10.00	16.40
WAFER-125CB-10A	11.25	17.65
WAFER-125CB-11A	12.50	18.90
WAFER-125CB-12A	13.75	20.15
WAFER-125CB-13A	15.00	21.40
WAFER-125CB-14A	16.25	22.65
WAFER-125CB-15A	17.50	23.90
WAFER-125CB-16A	23.75	30.15
WAFER-125CB-17A	36.25	42.65

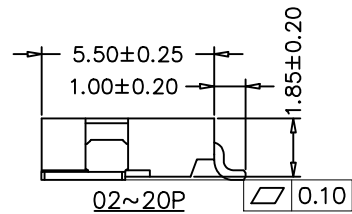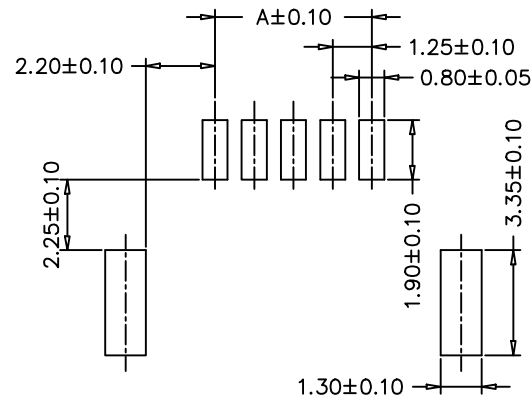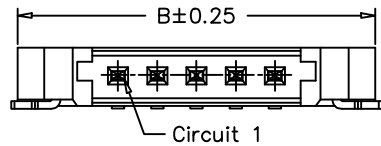

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.35 X.X :±0.25 X.XX :±0.15

ANGLES: X :±2° X.X :±1°

东 莞 市 汉 博 电 子 科 技 有 限 公 司
 DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE: WAFER 1.25 超薄系列

DWN: xiong PART NO. WAFER-125CB-NA

CHKD: lee SCALE: 1:1 UNIT: mm

APVD: wang SIZE: A4 SHEET: 10F 1 REV: A4

CUSTOMER COPY