


- NOTE:
1. Rating : DC 5V 10mA
 2. Contact Resistance: $100m\Omega$ MAX
 3. Insulation Resistance: $100M\Omega$ MIN
 4. Soldering Temper: $260 \pm 5^\circ/5s$
 5. Mechanical Life: 100,000 cycles
 6. Ever Portion 80 ± 50 gf
 7. Push Portion 205 ± 80 gf
 8. Travel: -24° 0° $+24^\circ$

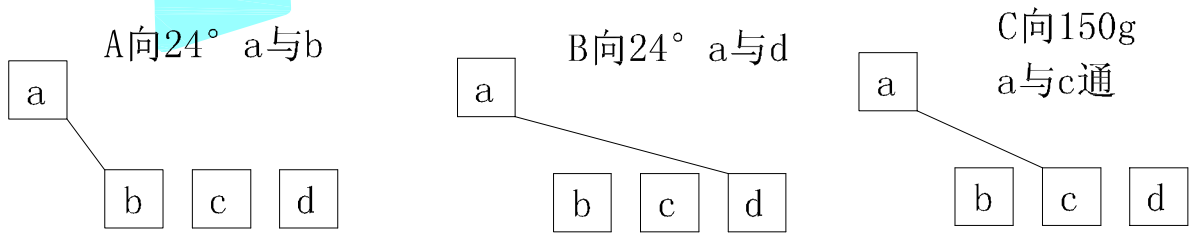

⑤	Spring	—	1	SUS	Natural	—
④	Terminal	—	5	Phosphor Bronze	Plating silver	—
③	Cover	—	1	SUS	Natural	—
②	Base	—	1	LCP	Black	—
①	Keystoke	—	1	PPA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		 ELECTRONICS CO.,LTD		
DRAWN	KUN.LU	2013/8/8				
CHECKED				TITLE:	MULTIFUNCTIONAL SWITCHES	
APPROVALS				PART NO.	K1-1502SA-04	
TOLERANCES ARE	30~以上	± 0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	± 0.20				
	5~10	± 0.15	$\pm 2'$	DRAWING NO.		SHEET 1 OF 1
	~ 5	± 0.10				

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.