

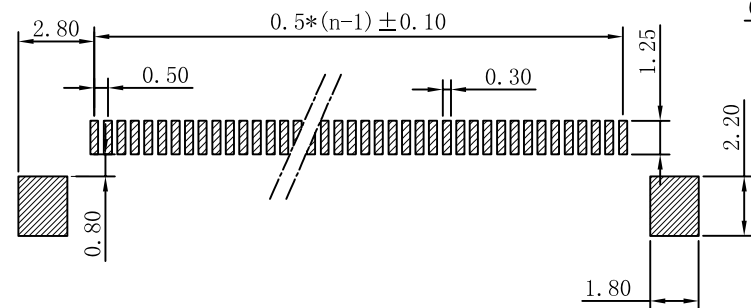
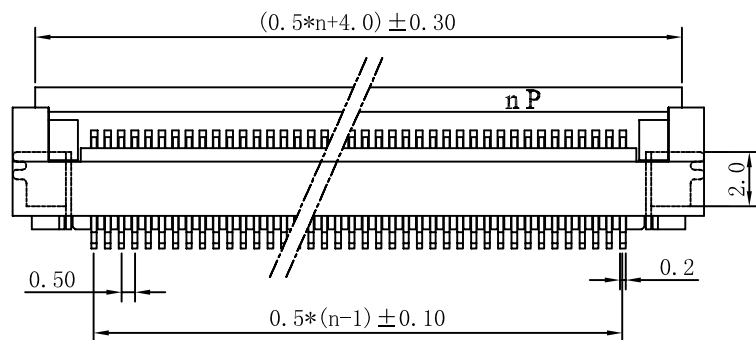
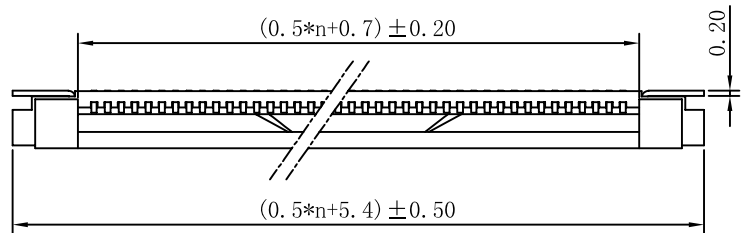
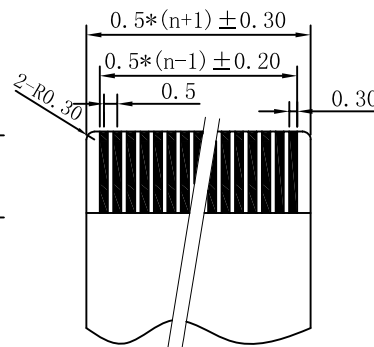




PCB Layout



适用扁平电缆

SPECIFICATIONS

Pitch:0.5

Poles:4~60

Voltage rating:50V DC/AC

Current rating:0.4A DC/AC

Withstand Voltage:200V AC/m

Working Temperature:-20℃~+85℃

Insulation Resistance:≥500MΩ

Material

Contact:Phosphor Bronze Tin-plated

Solder tab:Phosphor Bronze Tin-plated

Housing:Heat resistance plastic(UL94V-0)

Slider:Heat resistance plastic(UL94V-0)

Package: Pipe package

TOLERANCE TABLE

.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD					
CHECKED:	DATE:	TITLE: FPC0.5-XP 下接 掀盖式					
DRAWN: 舒梦	DATE: 2012-09-21	PROD. P/N		0.5K-DX-nPWB			
		UNIT	mm	SCALE	free	⊕	≡
		FILE NO.		Ckmtw-FPC-0053		REV.	A CJ00