




| | |
|---------|--------|
| NO.2 | |
| PART NO | VIGOR |
| 3 | 180±40 |

| | |
|-----------|---------------|
| NO.4-NO.5 | |
| PART NO | NOTE |
| 01~99 | SERIAL NUMBER |

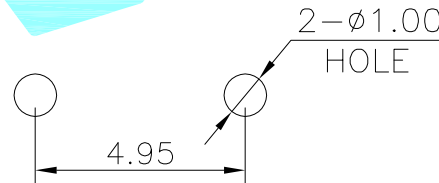

Circuit Diagram

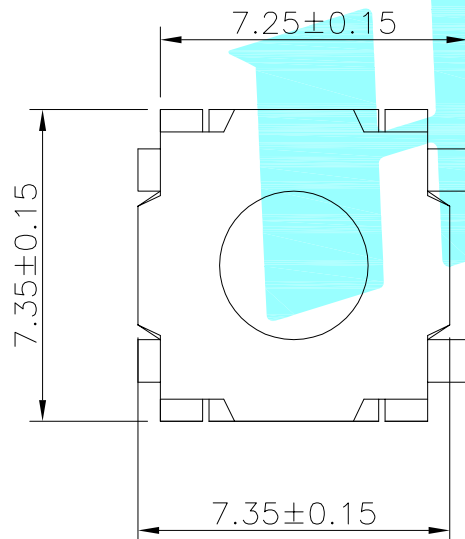

PCB Layout(Pattern side)

Typical Specifications

- 1.Rating : DC 12V 50mA
- 2.Contact Resistance: $\leq 100m\Omega$
- 3.Insulation Resistance: $\geq 100m\Omega$ DC250V
- 4.Travel: $0.3\pm 0.1mm$
- 5.Life : 100,000 Cycles

| ⑥ | Waterproof Silicone | — | 1 | Silica gel | Gray | — |
|------|---------------------|---------|------|-------------|----------------|--------|
| ⑤ | Terminal | — | 2 | Brass(0.3t) | Plating silver | — |
| ④ | Contact | — | 1 | F.Ag/SUS | White | — |
| ③ | Base | — | 1 | PPA | Blue | — |
| ② | Cover | — | 1 | Brass | Plating Nickel | — |
| ITEM | PART NAME | TER'NO. | QTY. | MATERIAL | FINISHING | REMARK |

| | | | | | | | | | | |
|----------------|-----------|----------|--------------|----------------------------|-------|----------|--------|--------|-------------|--------------|
| APPROVALS | | DATE | | ELECTRONICS CO.,LTD | | | | | | |
| DRAWN | J.X.Zhang | 2018/8/1 | | | | | | | | |
| CHECKED | | | | TITLE: TACT SWITCHS | | | | | | |
| APPROVALS | | | | PART NO. K2-1843DF-A□SW-□□ | | | | | | |
| TOLERANCES ARE | | | 30~以上 | ±0.30 | ANGLE | UNIT: mm | | | | |
| | | | 10~30 | ±0.20 | | | | | | |
| | | | 5~10 | ±0.15 | | | | | | |
| | | | ~ 5 | ±0.10 | | | | | | |
| | | | ±2' | SCALE: 1:1 | | PROJ: | | | | |
| ECN NO. | REV. | DATE. | DESCRIPTION. | | | CHANGE. | CHECK. | APPRO. | DRAWING NO. | SHEET 1 OF 1 |

| — | A | — | NEW | — | — | — |
|---------|------|-------|--------------|---------|--------|--------|
| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |