


Data sheet

2018-04-03
Product version 03
Document revision 0

Order No.: 1842924

Type: MCD 1,5/ 3-G1F-3,81

Header

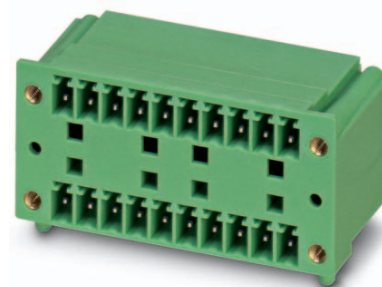

The figure shows a 10-pos. version with 20 contacts

1 Main features



- | | | | |
|-------------------------|---------------------|------------------------|---------------------|
| • No. of pos. | 3 | • Nominal current | 8 A |
| • Nominal cross section | 1.5 mm ² | • Nominal voltage | 160 V |
| • Color | green | • Connection direction | 0 ° |
| • Pitch | 3.81 mm | • Type of packaging | packed in cardboard |
| • Mounting type | Wave soldering | | |

2 Your advantages

- ✓ Well-known mounting principle allows worldwide use
- ✓ Screwable flange for superior mechanical stability
- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Conductor connection on several levels enables higher contact density




Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1842924

3 Table of contents

1	Main features	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only)	3
5	item properties	4
5.1	Material data	4
6	Dimensions	4
6.1	Dimensions for the product	4
6.2	Dimensions for PCB design	4
7	Series drawing	5
8	Packaging information	6
9	Application	6
9.1	Temperature limit values	6
10	Mechanical tests	7
11	Electrical tests	8
11.1	Electrical data	8
11.2	Air and creepage distances	8
12	Current carrying capacity/derating curves	9
13	Environmental and durability tests	10
13.1	Vibration test	10
14	Classification for connectors	10
15	Approvals	10
16	Commercial Data	12
17	corresponding plugs	12
18	Accessories	12
19	Combination tests	13

1842924 MCD 1,5/ 3-G1F-3,81

4 3D model in PDF can be activated (Acrobat Reader only)

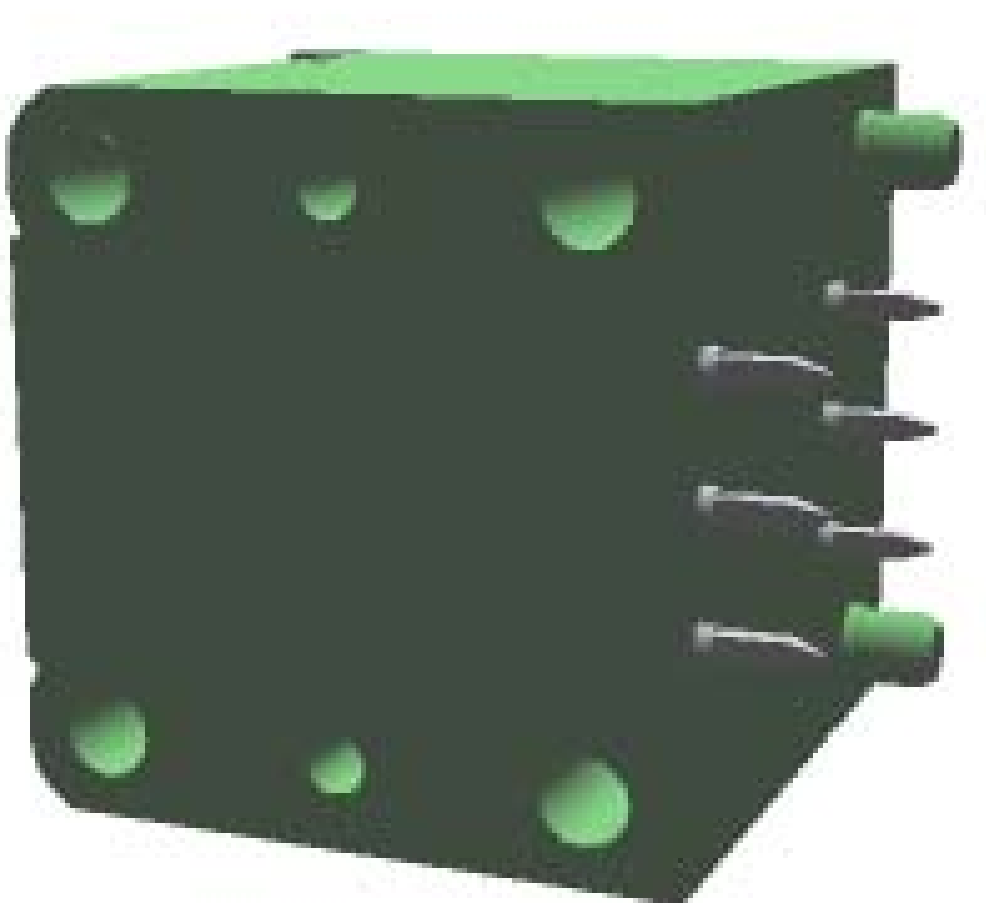

1842924 MCD 1,5/ 3-G1F-3,81**5 item properties**

Order No.	1842924
Type	MCD 1,5/ 3-G1F-3,81
Type of contact	Male connector
Range of articles	MCD 1,5/...-G1F
Pitch	3.81 mm
Number of positions	3
Locking	Threaded flange
Mounting type	Wave soldering
Pin layout	Linear pinning
Product note	In combination with MCV plug components, both an MCVW and an MCVR plug must be used.

5.1 Material data

Material of metal parts		
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201	
Contact material	Cu alloy	
Surface contact area	Ni 1 µm ... 3 µm , Sn 3 µm ... 5 µm	
Soldering area surface	Ni 1 µm ... 3 µm , Sn 3 µm ... 5 µm	
Surface characteristics	Tin-plated	
Insulating material data	Housing	Housing
Insulating material	PA	
CTI according to IEC 60112	600	
Flammability rating according to UL 94	V0	
Color	green (6021)	
Glow wire flammability index GWFI according to EN 60695-2-12	850	
Glow wire ignition temperature GWIT according to EN 60695-2-13	775	
Temperature for the ball pressure test according to EN 60695-10-2	125 °C	


6 Dimensions**6.1 Dimensions for the product**

Length	21.9 mm
Width	21.82 mm
Height (without solder pin)	22.7 mm
Total height	26.2 mm
Solder pin [P]	3.5 mm
Dimension a	7.62 mm

6.2 Dimensions for PCB design

Hole diameter	1.2 mm
Pin dimensions	0,8 x 0,8
Pin spacing	12.70 mm

7 Series drawing

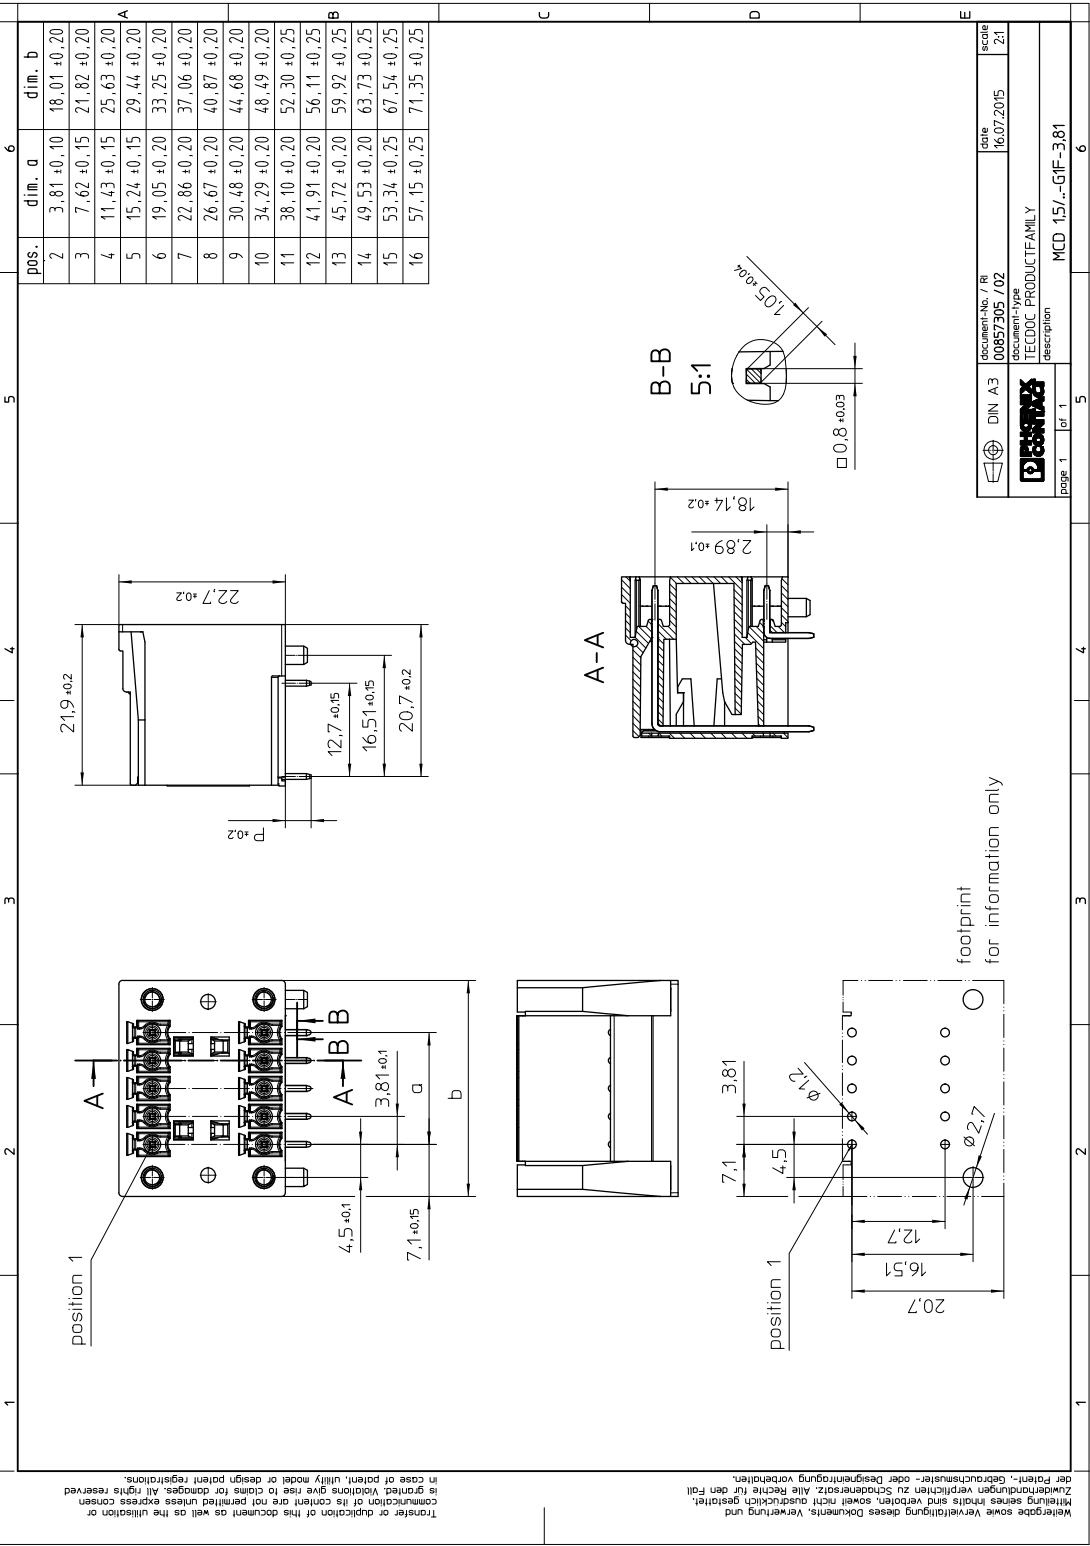

8 Packaging information

Type of packaging	packed in cardboard
Pieces per package	50

9 Application

9.1 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

1842924 MCD 1,5/ 3-G1F-3,81**10 Mechanical tests****Mechanical test group A**

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	8 N
Withdraw strength per pos. approx.	5 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	28.5 N

1842924 MCD 1,5/ 3-G1F-3,81**11 Electrical tests****11.1 Electrical data**

Rated current / conductor cross section	8 A / 1.5 mm ²
Rated insulation voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Contact resistance	
Degree of pollution	2

11.2 Air and creepage distances

Component	Header		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	160 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	1.5 mm	1.5 mm	1.5 mm
Minimum value of the creepage path requirement in acc. with table	2 mm	1.5 mm	1.6 mm

1842924 MCD 1,5/ 3-G1F-3,81

12 Current carrying capacity/derating curves

Specification

IEC 61984:2008-10

Note

Representation based on IEC 60512-5-2:2002-02

Reduction factor

0.8

Number of positions


See diagram

Conductor cross section

1.5 mm²

Note

Type: MC 1,5/...-STF-3,81 with MCD 1,5/...-G1F-3,81

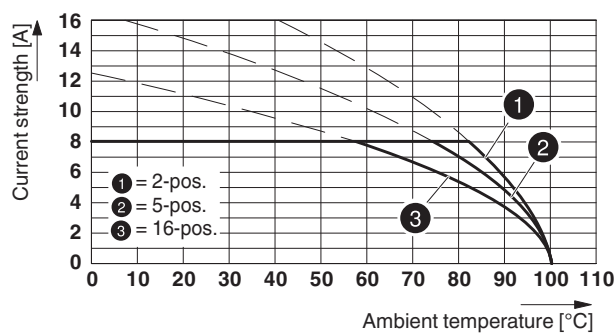

1842924 MCD 1,5/ 3-G1F-3,81**13 Environmental and durability tests****13.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis

14 Classification for connectors

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protection class	
Protective conductor	without PE
Lock	no

15 Approvals

CSA 				
Use group	B	D		
mm ² /AWG/kcmil				
Voltage	300 V	300 V		
Current	8 A	8 A		

VDE Gutachten mit Fertigungsüberwachung 				
mm ² /AWG/kcmil				
Voltage	160 V			
Current	8 A			

IECEE CB Scheme 				
mm ² /AWG/kcmil				
Voltage	160 V			
Current	8 A			

CCA				
mm ² /AWG/kcmil				
Voltage	160 V			
Current	8 A			

1842924 MCD 1,5/ 3-G1F-3,81cULus Recognized 

Use group	B	D		
mm ² /AWG/kcmil				
Voltage	300 V	300 V		
Current	8 A	8 A		

EAC 

1842924 MCD 1,5/ 3-G1F-3,81**16 Commercial Data**

Order No.	1842924
Type	MCD 1,5/ 3-G1F-3,81
Pieces per package	50
Net weight	6.555 g
GTIN	4017918112127
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 corresponding plugs

Order No.	Type
1748367	FMC 1,5/ 3-STF-3,81
1827716	MC 1,5/ 3-STF-3,81
1828359	MCVR 1,5/ 3-STF-3,81
1828508	MCVW 1,5/ 3-STF-3,81
1850864	FRONT-MC 1,5/ 3-STF-3,81
1851245	FK-MCP 1,5/ 3-STF-3,81
1852370	MCC 1/ 3-STZF-3,81
1897555	QC 0,5/ 3-STF-3,81

18 Accessories

Description	Order No.	Type
Coding profile, is inserted into the slot on the plug or inverted header, red insulating material	1734634	CP-MSTB
	0804109	SK 3,81/2,8:FORTL.ZAHLEN

1842924 MCD 1,5/ 3-G1F-3,81**19 Combination tests****MCD 1,5/-G1F****MC 1,5/-STF****Mechanical tests (A)**

Insertion/withdrawal force per position

approx. 8 N / 5 N

Polarization when inserted
Requirement >20 N

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Durability tests (B)Contact resistance R_1 1st level1.2 m Ω Contact resistance R_1 2nd level2.2 m Ω

Insertion/withdrawal cycles

25

Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$

2.95 kV

Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$

1.39 kV

Insulation resistance
Requirements > 5 M Ω > 2 T Ω **Thermal tests (C)**

Tested number of positions

16

Tested conductor cross section

1.5 mm²

Test current

8 A

Upper limiting temperature
Requirements < 100°C

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$

2.95 kV

Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$

1.39 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test finger