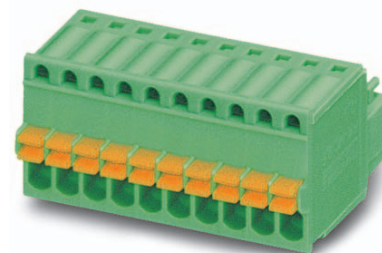


Order No.: 1881406

Type: FK-MC 0,5/10-ST-2,5

Plug component, Push-in spring connection



The figure shows a 10-position version of the product

1 Main features



- | | | | |
|---------------------------|---------------------------|------------------------|---------------------|
| • No. of pos. | 10 | • Nominal current | 4 A |
| • Conductor cross section | 0.5 mm ² | • Nominal voltage | 160 V |
| • Color | green | • Connection direction | 0 ° |
| • Pitch | 2.5 mm | • Type of packaging | packed in cardboard |
| • Connection method | Push-in spring connection | | |

2 Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Intuitive use through colour coded actuation lever
- ✓ Operation and conductor connection from one direction enable integration into front of device
- ✓ Quick and convenient testing using integrated test option



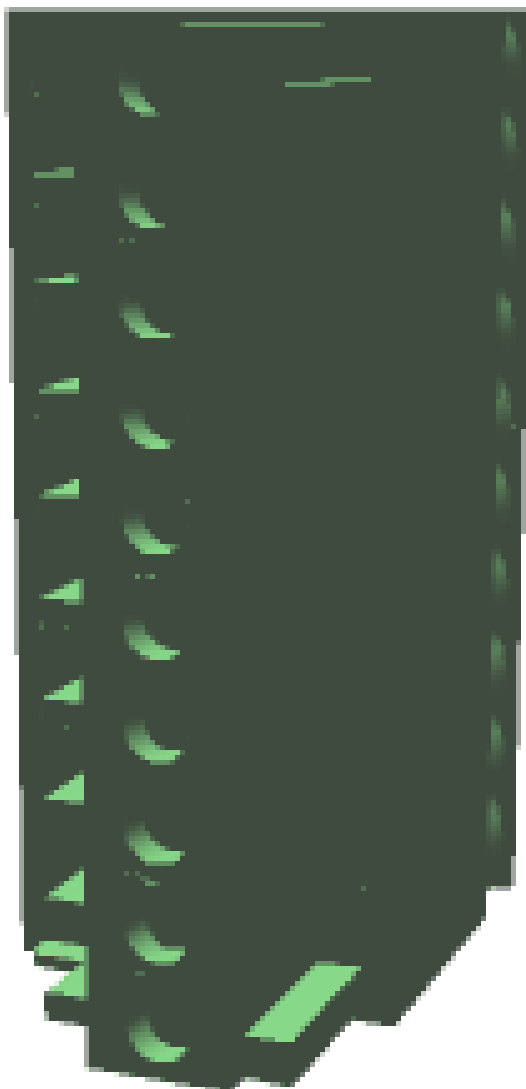
Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1881406

3 Table of contents

1	Main features	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only)	3
5	item properties	4
5.1	Connection capacity	4
5.2	Specifications for ferrules	4
5.3	Material data	4
6	Dimensions	4
6.1	Dimensions for the product	4
7	Series drawing	6
8	Packaging information	7
9	Application	7
9.1	General information	7
9.2	Temperature limit values	7
10	Mechanical tests	8
10.1	Termination and connection method	8
10.2	Pull-out test	8
11	Electrical tests	9
11.1	Electrical data	9
11.2	Air and creepage distances	9
11.3	Electrical function	9
11.4	Temperature cycles	9
12	Current carrying capacity/derating curves	10
13	Environmental and durability tests	12
13.1	Vibration test	12
14	Classification for connectors	12
15	Approvals	12
16	Commercial Data	13
17	corresponding headers	13
18	Accessories	13
19	Combination tests	14

1881406 FK-MC 0,5/10-ST-2,5

4 3D model in PDF can be activated (Acrobat Reader only)



1881406 FK-MC 0,5/10-ST-2,5**5 item properties**

Order No.	1881406
Type	FK-MC 0,5/10-ST-2,5
Type of contact	Female connector
Range of articles	FK-MC 0,5/...-ST
Pitch	2.5 mm
Number of positions	10
Connection method	Push-in spring connection
Locking	without

5.1 Connection capacity

Conductor cross section, solid	0.14 mm ² to 0.5 mm ²
Conductor cross section, flexible	0.14 mm ² to 0.5 mm ²
Conductor cross section AWG/kcmil	26 to 20
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² to 0.5 mm ²
Cylindrical gauge a x b / diameter	- / 1.4 mm
Stripping length	8 mm

5.2 Specifications for ferrules

Ferrules without insulating collar, according to DIN 46228-1	
Ferrules with insulating collar, according to DIN 46228-4	

5.3 Material data

Material of metal parts		
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201	
Contact material	Cu alloy	
Terminal point surface	Sn 4 µm ... 8 µm	
Surface contact area	Sn 4 µm ... 8 µm	
Surface characteristics	hot-dip tin-plated	
Insulating material data	Housing	Actuation element
Insulating material	PA	POM
CTI according to IEC 60112	600	600
Flammability rating according to UL 94	V0	HB
Color	green (6021)	orange (2003)
Glow wire flammability index GWFI according to EN 60695-2-12	850	
Glow wire ignition temperature GWIT according to EN 60695-2-13	775	
Temperature for the ball pressure test according to EN 60695-10-2	125 °C	

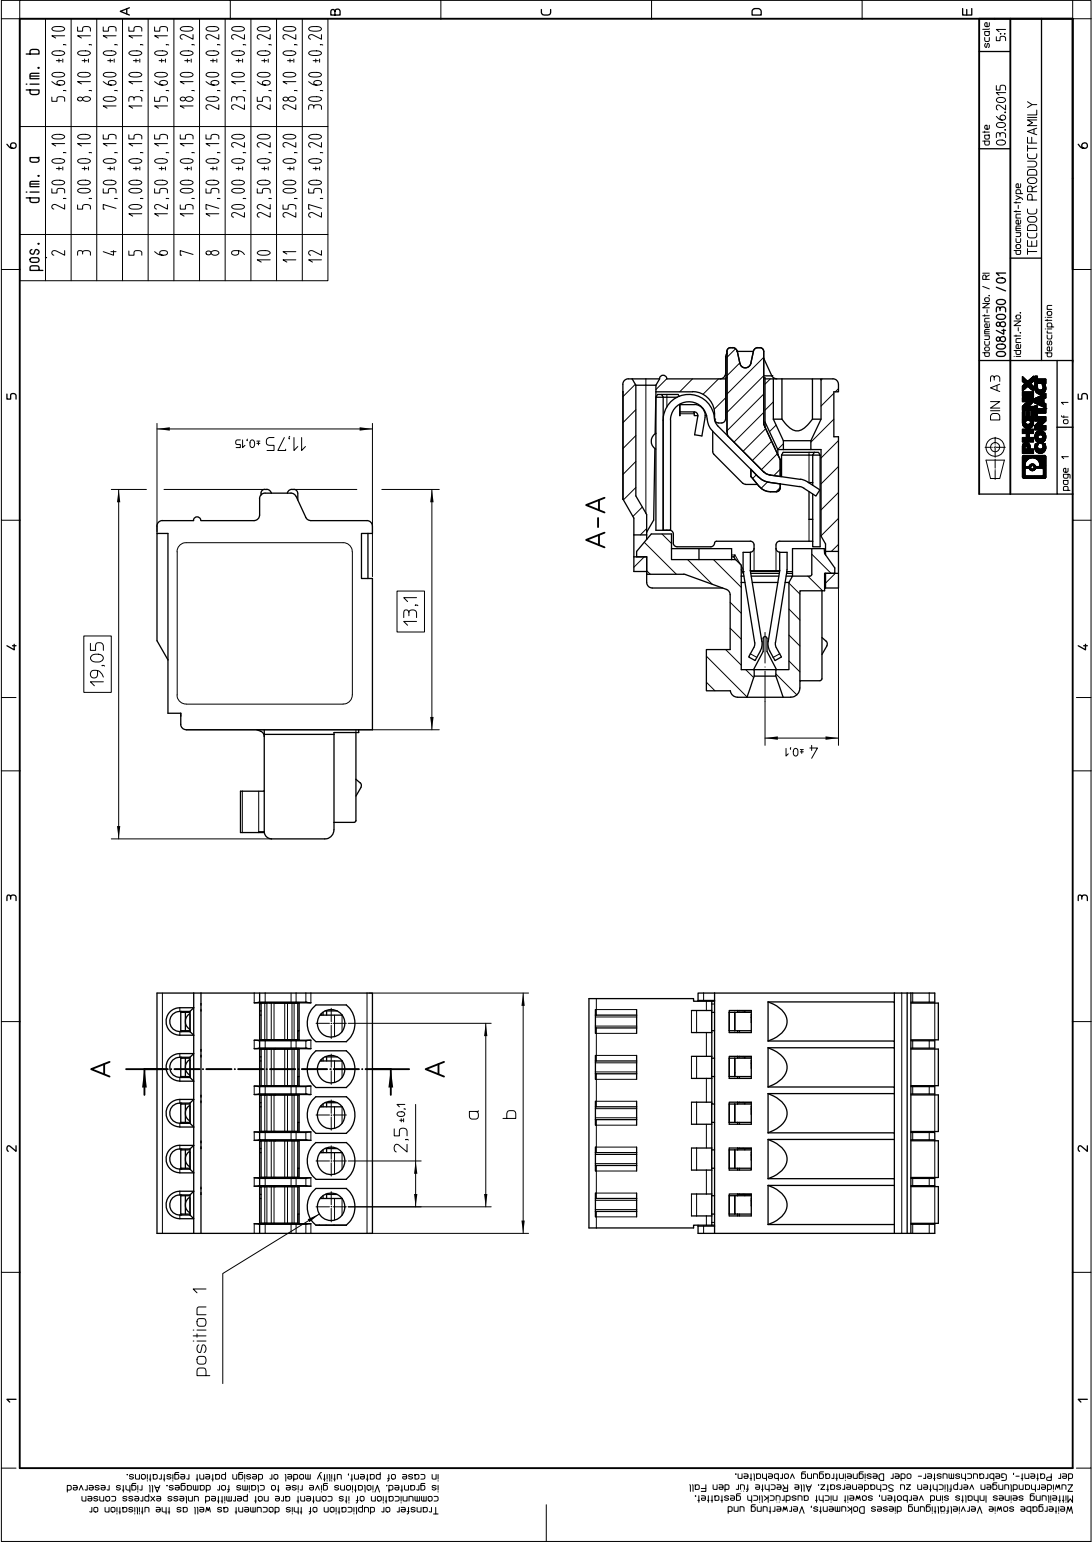
6 Dimensions**6.1 Dimensions for the product**

1881406 FK-MC 0,5/10-ST-2,5

Document revision 0

Length	19.05 mm
Width	25.6 mm
Total height	11.75 mm
Dimension a	22.5 mm

7 Series drawing



1881406 FK-MC 0,5/10-ST-2,5**8 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	50

9 Application**9.1 General information**

Notes on operation	In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load.
--------------------	--

9.2 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

1881406 FK-MC 0,5/10-ST-2,5**10 Mechanical tests****Mechanical test group A**

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	8 N
Withdraw strength per pos. approx.	6 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	24 N

10.1 Termination and connection method

Specification	IEC 60999-1:1999-11
Conductor connection	Test passed
Repeated connection and disconnection	Test passed
Check for damage to conductor or loosening	Test passed

10.2 Pull-out test**Termination and connection method: pull-out test**

Specification	IEC 60999-1:1999-11
Result	Test passed
Conductor cross section/conductor type/tractive force actual value	0.2 mm ² / solid / > 10 N
Conductor cross section/conductor type/tractive force actual value	0.2 mm ² / stranded / > 10 N
Conductor cross section/conductor type/tractive force actual value	0.5 mm ² / solid / > 20 N
Conductor cross section/conductor type/tractive force actual value	0.5 mm ² / stranded / > 20 N

1881406 FK-MC 0,5/10-ST-2,5**11 Electrical tests****11.1 Electrical data**

Rated current / conductor cross section	4 A / 0.5 mm ²
Rated insulation voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Contact resistance	2 mΩ
Degree of pollution	2

11.2 Air and creepage distances

Component	Plug component		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	100 V	160 V	320 V
Rated surge voltage	1.5 kV	2.5 kV	2.5 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	0.8 mm	1.5 mm	1.5 mm
Minimum value of the creepage path requirement in acc. with table	1.8 mm	0.8 mm	1.6 mm

11.3 Electrical function

Specification	IEC 60999-1:1999-11
Result	Test passed
Voltage drop	Voltage drop (U) after the load ≤ 15 mV
Test current (minimum cross section)	4 A
Test current (maximum cross section)	6 A
Conductor cross section, flexible	0.14 mm ² to 0.5 mm ²
Conductor cross section, solid	0.14 mm ² to 0.5 mm ²

11.4 Temperature cycles

Specification	IEC 60999-1:1999-11
Result	Test passed
Voltage drop	Voltage drop (U) after the load ≤ 22.5 mV or 1.5 x U _{after 24 h} The small value is to be used.
Test current (minimum cross section)	4 A
Test current (maximum cross section)	6 A
Temperature cycles	192
Conductor cross section, flexible	0.14 mm ² to 0.5 mm ²
Conductor cross section, solid	0.14 mm ² to 0.5 mm ²

1881406 FK-MC 0,5/10-ST-2,5

12 Current carrying capacity/derating curves

Specification

IEC 61984:2008-10

Note

Representation based on IEC 60512-5-2:2002-02

Reduction factor

0.8

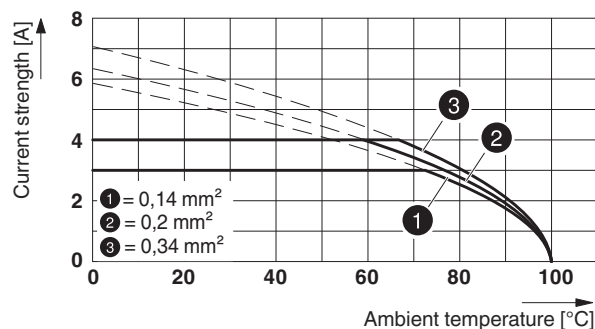
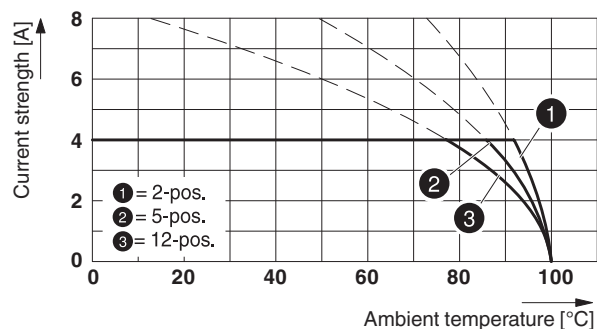
Number of positions

See diagram

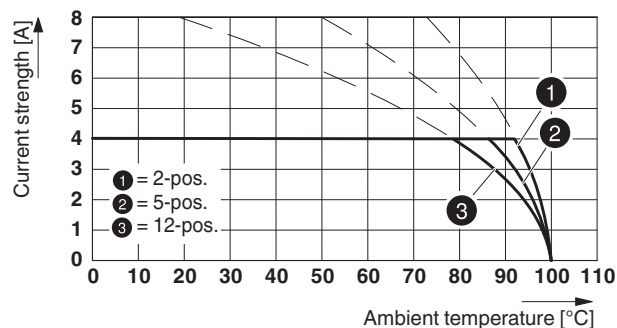
Conductor cross section

0.5 mm²

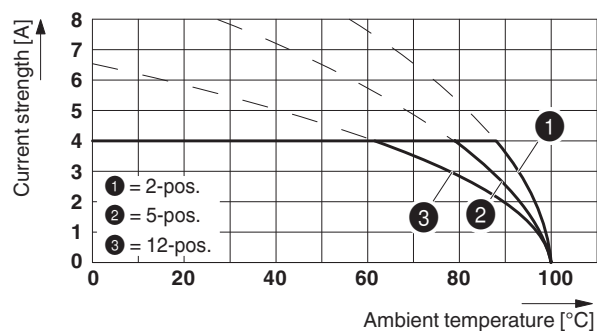
Type: FK-MC 0,5/...-ST-2,5 with MC 0,5/...-G-2,5

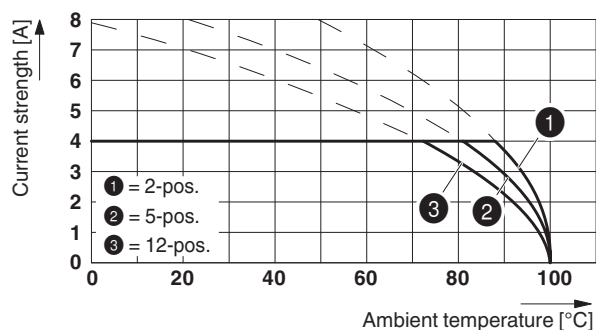
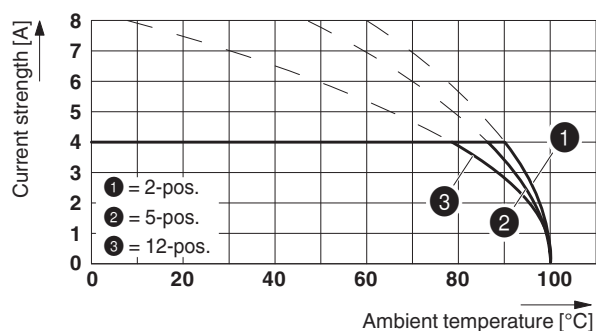
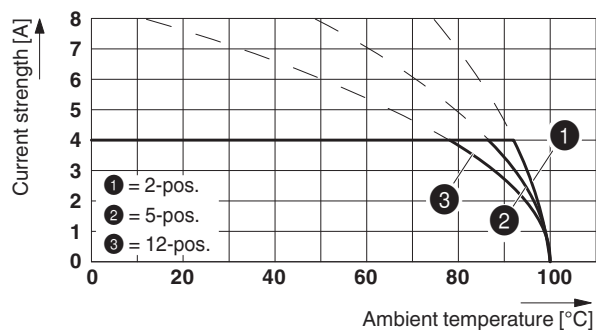
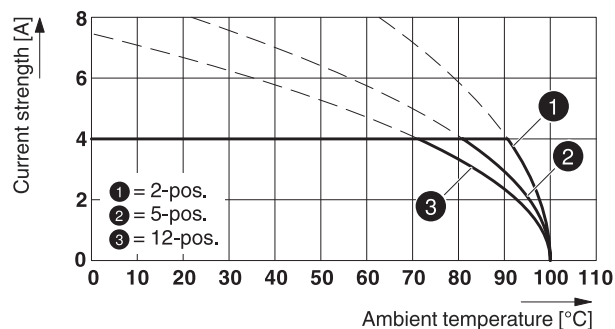


Type: FK-MC 0,5/...-ST-2,5 with MCV 0,5/...-G-2,5



Type: FK-MC 0,5/...-ST-2,5 with MCD 0,5/...-G1-2,5



1881406 FK-MC 0,5/10-ST-2,5**Type: FK-MC 0,5/...-ST-2,5 with MCDV 0,5/...-G1-2,5****Type: FK-MC 0,5/...-ST-2,5 with MC 0,5/...-G-2,5 THT****Type: FK-MC 0,5/...-ST-2,5 with MCV 0,5/...-G-2,5 THT****Type: FK-MC 0,5/...-ST-2,5 with MCD 0,5/...-G1-2,5 HT BK**

1881406 FK-MC 0,5/10-ST-2,5**13 Environmental and durability tests****13.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis

14 Classification for connectors

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Connection method	Can be reconnected
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protective conductor	without PE
Lock	no
Connection method	Screwless terminal points

15 Approvals

VDE Gutachten mit Fertigungsüberwachung 				
mm ² /AWG/kcmil	0.2-0.5			
Voltage	100 V			
Current	4 A			
IECEE CB Scheme 				
mm ² /AWG/kcmil	0.2-0.5			
Voltage	100 V			
Current	4 A			
CCA				
mm ² /AWG/kcmil	0.2-0.5			
Voltage	100 V			
Current	4 A			
EAC 				
cULus Recognized 				
Use group	B			
mm ² /AWG/kcmil	28-20			
Voltage	125 V			
Current	4 A			

1881406 FK-MC 0,5/10-ST-2,5**16 Commercial Data**

Order No.	1881406
Type	FK-MC 0,5/10-ST-2,5
Pieces per package	50
Net weight	6.15 g
GTIN	4017918156657
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 corresponding headers

Order No.	Type
1881529	MC 0,5/10-G-2,5
1881639	MCV 0,5/10-G-2,5
1894888	MCD 0,5/10-G1-2,5
1894998	MCDV 0,5/10-G1-2,5
1961229	MCD 0,5/10-G1-2,5 HT BK
1961326	MCDV 0,5/10-G1-2,5 HT BK
1963502	MC 0,5/10-G-2,5 THT
1963612	MCV 0,5/10-G-2,5 THT
1963722	MC 0,5/10-G-2,5 THT R44
1963845	MCV 0,5/10-G-2,5 THT R44

18 Accessories

Description	Order No.	Type
Micro screwdriver, bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip and twist cap	1205202	SZS 0,4X2,0
	0804853	SK 2,54/2,8:FORTL.ZAHLEN

1881406 FK-MC 0,5/10-ST-2,5

19 Combination tests

**FK-MC 0,5/10-ST**

Specification

Mechanical tests (A)

Insertion/withdrawal force per position

Polarization when inserted
Requirement >20 NContact holder in insert
Requirements >20 N**Durability tests (B)**Contact resistance R_1

Insertion/withdrawal cycles

Contact resistance R_2 Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$ Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$ Insulation resistance
Requirements > 5 M Ω **Thermal tests (C)**

Tested number of positions

Tested conductor cross section

Test current

Upper limiting temperature
Requirements < 100°C**Climatic tests (D)**


Test sequence 1: low temperature storage

Test sequence 2: heat storage


Test sequence 3: noxious gas storage
(ISO 6988)Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$ Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$ **Environmental and endurance tests (E)**

Specification


Degree of protection

**MC 0,5/10-ST**


IEC 61984

**MCV 0,5/10-ST**

IEC 61984

**MCD 0,5/10-ST**

IEC 61984

**MCDV 0,5/10-ST**

IEC 61984

approx. 8 N / 6 N

Test passed

Test passed

2 m Ω

25

2.2 m Ω

2.95 kV

1.39 kV

80 G Ω

12

0.5 mm²

4 A DC

Test passed

-40 °C/2 h

100 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

2.95 kV

1.39 kV

IEC 61984:2008-10

Finger safety with IP20
test finger

approx. 7 N / 6 N

Test passed

Test passed

2 m Ω

25

2.2 m Ω

2.95 kV

1.39 kV

0.1 T Ω

12

0.5 mm²

4 A DC

Test passed

-40 °C/2 h

100 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

2.95 kV

1.39 kV

IEC 61984:2008-10

Finger safety with IP20
test finger

approx. 7 N / 7 N

Test passed

Test passed

3 m Ω

25

4 m Ω

1.75 kV

0.84 kV

10¹² Ω

12

0.5 mm²

4 A

Test passed

-40 °C/2 h

100 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

1.75 kV

0.84 kV

IEC 61984:2008-10

Finger safety with IP20
test finger

approx. 7 N / 6 N

Test passed

Test passed

3 m Ω

25

4 m Ω

1.75 kV

0.84 kV

10¹¹ Ω

12

0.5 mm²

4 A

Test passed

-40 °C/2 h

100 °C/168 h


0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

1.75 kV

0.84 kV

IEC 61984:2008-10

Finger safety with IP20
test finger

1881406 FK-MC 0,5/10-ST-2,5**FK-MC 0,5/10-ST****MC 0,5/10-G-THT****MCV 0,5/10-G-THT****MCD 0,5/10-G1-HT**

Specification

IEC 61984

IEC 61984

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 8 N / 6 N

approx. 8 N / 6 N

approx. 7 N / 6 N

Polarization when inserted
Requirement >20 N

Test passed

Test passed

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Test passed

Test passed

Durability tests (B)Contact resistance R_1

2 mΩ

2 mΩ

3 mΩ

Insertion/withdrawal cycles

25

25

25

Contact resistance R_2

2.2 mΩ

2.2 mΩ

3.2 mΩ

Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$

2.95 kV

2.95 kV

2.5 kV

Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$

1.39 kV

1.39 kV

1.39 kV

Insulation resistance
Requirements > 5 MΩ

> 10 TΩ

> 10 TΩ

> 20 GΩ

Thermal tests (C)

Tested number of positions

12

12

12

Tested conductor cross section

0.5 mm²0.5 mm²0.5 mm²

Test current

4 A

4 A

4 A

Upper limiting temperature
Requirements < 100°C

Test passed

Test passed

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

100 °C/168 h

100 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$

2.95 kV

2.95 kV

2.5 kV

Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$

1.39 kV

1.39 kV

1.39 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test finger