
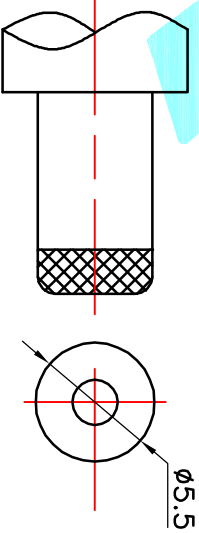



P.C.B LAYOUT(Copper-side view)

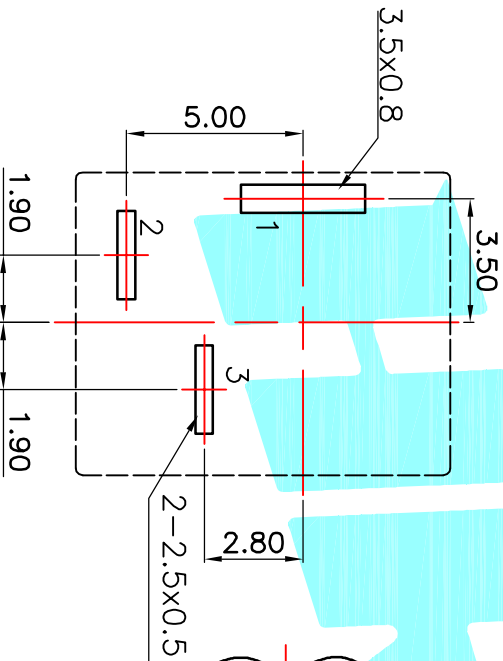

DC MATE PLUG

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

Model No.	1	2	3
PIN	$\phi 2.0$	$\phi 2.35$	$\phi 2.5$

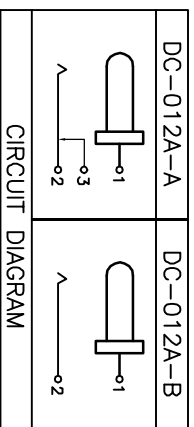

DRAWN		J.X.Zhang		DATE		2013/11/11	
CHECKED				TITLE:		PHONE JACKETS	
APPROVALS				PART NO.		DC-012A	
TOLERANCES ARE		30 ^{±0.15}		±0.30		ANGLE	
		10 ^{±0.30}		±0.20		UNIT: mm	
		5 ^{±0.10}		±0.15		SCALE: 1:1	
		~ 5		±0.10		DRAWING NO.	
				±Z'		SHEET 1 OF 1	
ELECTRONICS CO.,LTD		HROE		PROJ.			
APPROVALS		DATE		REMARK			
ITEM		PART NAME		TERNO. QTY.		MATERIAL FINISHING	
①		Terminal		3		Phosphor bronze Au Plating	
		Housing		1		Nylon Black	
ECN NO.		REV.		DATE.		DESCRIPTION.	
		A				NEW	