
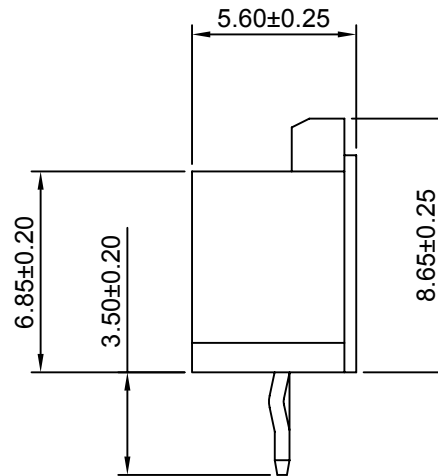
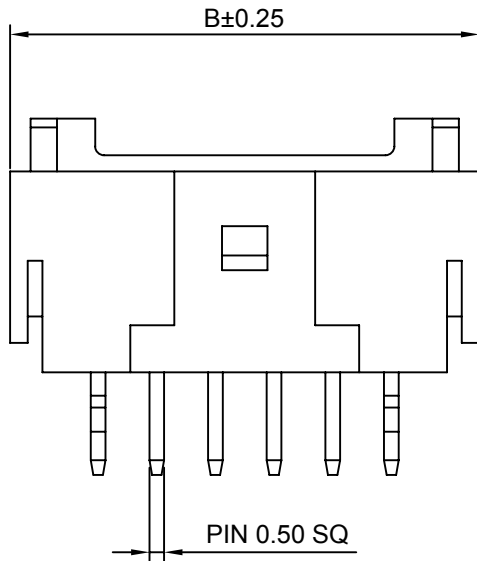

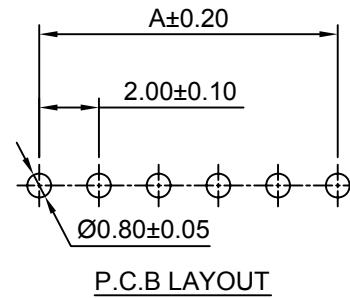


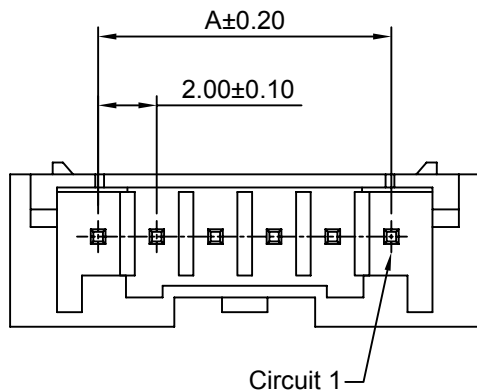

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 10m Ω Max.
Insulation Resistance: 1000M Ω Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 6T, UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	8.00	10P	18.00	24.00
3P	4.00	10.00	11P	20.00	26.00
4P	6.00	12.00	12P	22.00	28.00
5P	8.00	14.00	13P	24.00	30.00
6P	10.00	16.00	14P	26.00	32.00
7P	12.00	18.00	15P	28.00	34.00
8P	14.00	20.00	16P	30.00	36.00
9P	16.00	22.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY:	Approved :
LIZQ	GONGYB

General Tolerance

x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

Title :
2.00mm PITCH
180° WAFER

DRAW NO : **A2012WV-XP**

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2013.04.17