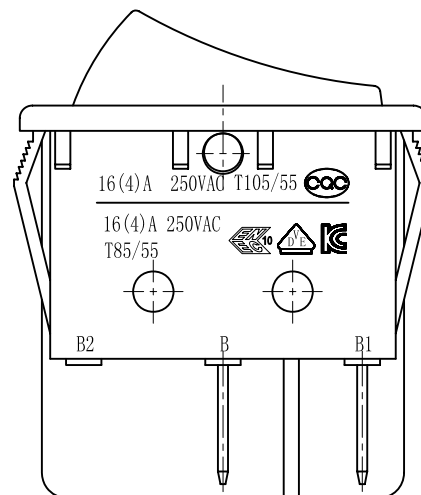
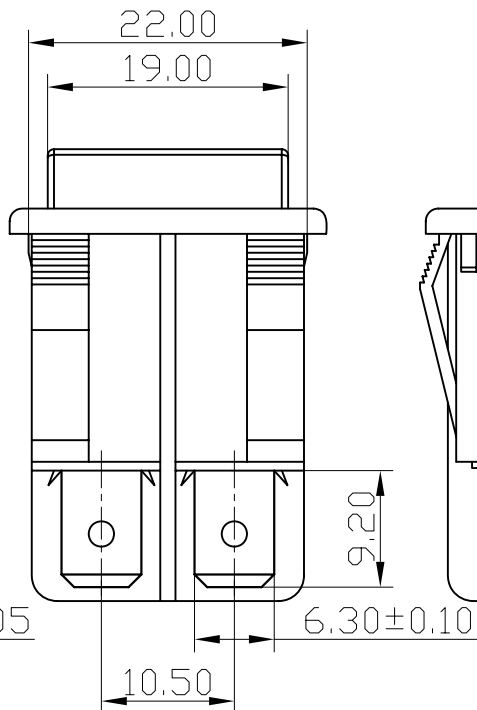
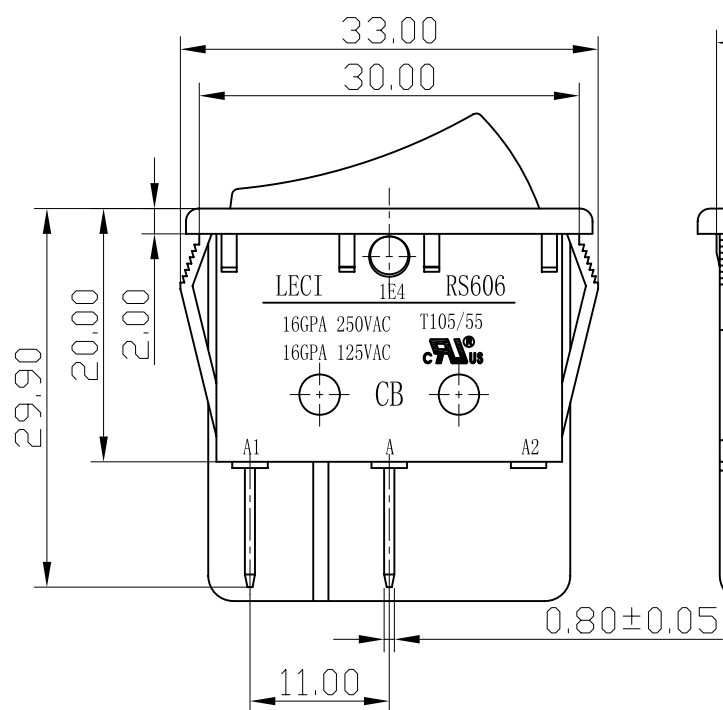


PANEL CUT-OUT		
Z	Y	X
0.70~1.25	22.10~22.20	30.1~30.2
1.25~2.00	22.10~22.20	30.3~30.4
2.00~3.00	22.10~22.20	30.4~30.5

NOTES:

1.Rating:

CQC 16(4)A 250V AC T105/55

VDE ENEC 16(4)A 250V AC T85/55

KC 16(4)A 250V AC T185/55

UL cUL 16GPA 125V AC/16GPA 250V AC T105/55

2.Circuit Diagram: 4P ON-OFF

3.Terminal Strength: $\geq 80\text{N}$

4.Electrical life: ≥ 10000 cycles

5.Withstand Voltage: Withstand Voltage:1500VAC 1min



6.Terminals to Button:3000VAC 1min

7.Leakage Current:1mA

8.Current resistance: $\leq 50\text{m}\Omega$ (initial)

9.Insulation resistance: $\geq 100\text{M}\Omega$ 500V DC

10.Body Materil: NYLON 66 94V-2~0

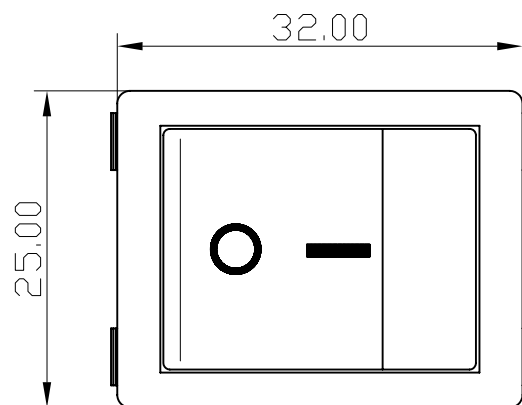

A4				普通公差: COMMON TOLERANCE:		深圳市华灿天禄电子有限公司					
A3											
A2				UP TO 5	± 0.20	单位 UNIT	mm	投影 PROJECTED		品名 PRODUCT NAME	跷板开关
A1				ABOVE 5 TO 30	± 0.30	绘图 DRAWN BY	周金勇	核对 CHECKED BY	梁金勇	型号 MODEL NO.	RS606
REV.	DATE	REVISION DESCRIPTION	ISSUE	ABOVE 30	± 0.50	日期 DATE	2016.01.07	核准 APPROVAL BY	周培雷	图号 DWG NO.	RS606BE-2010002CBB
				ANGULAR	$\pm 5^\circ$						