


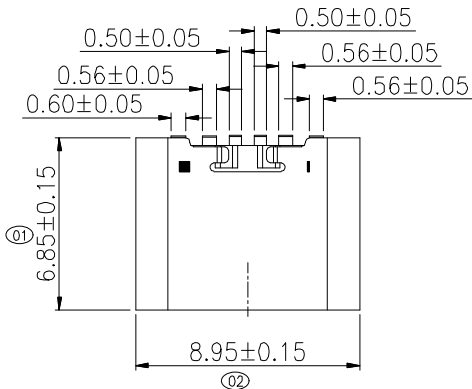
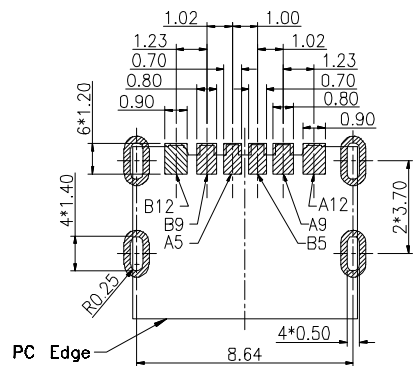
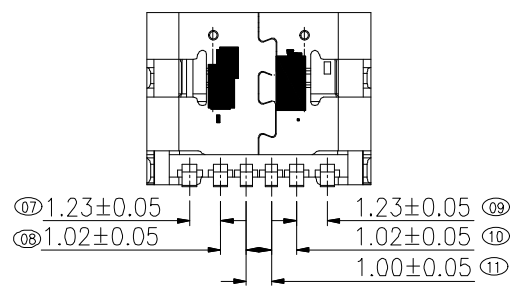


REV.	MODIFICATION	ECN No.	NAME	DATE
A0	新版发行		宋亮红	2017-02-24

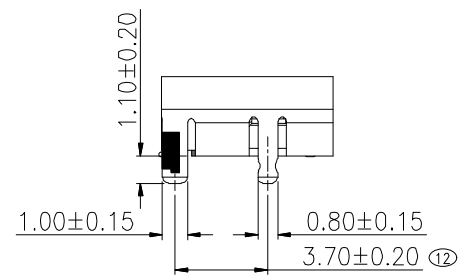

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

- NOTES:
- MATERIAL:
 - MOLDING: LCP UL94 V-0
 - CONTACT: COPPER ALLOY.
 - GOLD PLATED Min ON CONTACT AREA, 100u"
 - Min TIN (LEAD FREE) ON SOLDER AREA,
 - SHELL: COPPER ALLOY=0.30±0.03mm
 - 50u" NICKEL PLATING OVER ALL.
 - MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N AFTER TEST.
 - DURABILITY: 5000 CYCLES
 - ELECTRICAL:
 - CURRENT: 3.5A FOR VBUS;
 - 1.25A FOR GND PIN.
 - 0.25A FOR OTHER.
 - VOLTAGE: 20 V MAX
 - WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
 - TEMPERATURE RANGE -25°C ~ +85°C
 - 尺寸标注事项:
 - 图示有标示"XX"者为首样全检, 重点管控尺寸.
 - 产品符合RoHS标准.

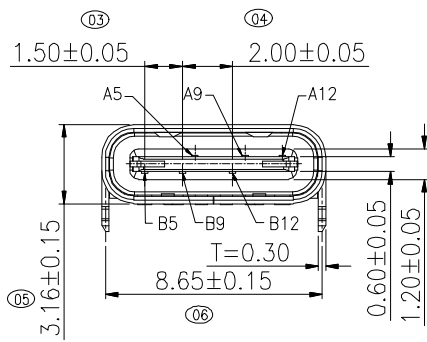

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

Table:

成品料号	零件名称	零件料号	材料 / 电镀
TX	端子	TX	SUS 304 R-H NO PLATING
	注塑材料	TX	SUS 301 R-H Sn 80~200u"
	外壳	TX	SUS 301 R-H 电镀切料带后.

深圳市华灿天禄电子有限公司

.X: ±0.35	.X': ±1.5'	INTENDED USE:	TITLE:	
.XX: ±0.25	.XX': ±1.0'	CONNECTOR		IIC-TYPE-C-6P-01A
.XXX: ±0.20	.XXX': ±0.5'	APPD.:	PART NO.:	SEE TABLE
MAT'L.:	SEE NOTES	CHKD.:	DWG. NO.:	T16-000X
FINISH:		DR.: Len.Song	SCALE: 1:1	PAGE: 1/1
			UNIT: mm	REV.: A0