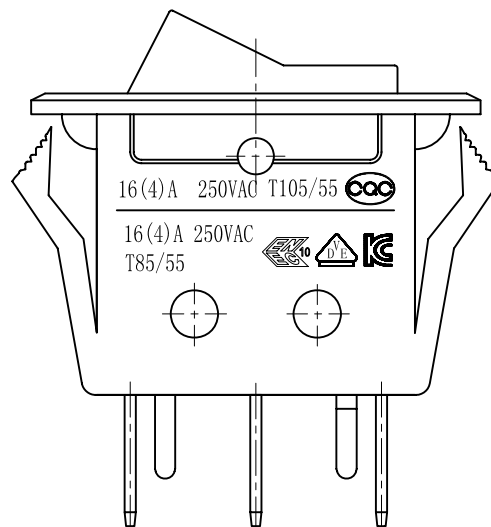
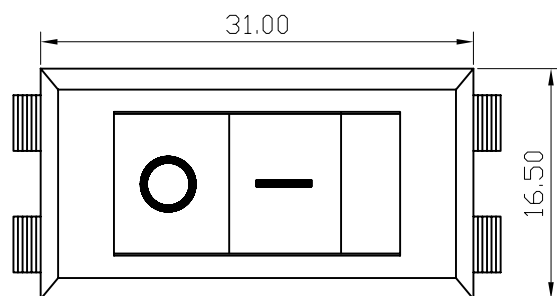
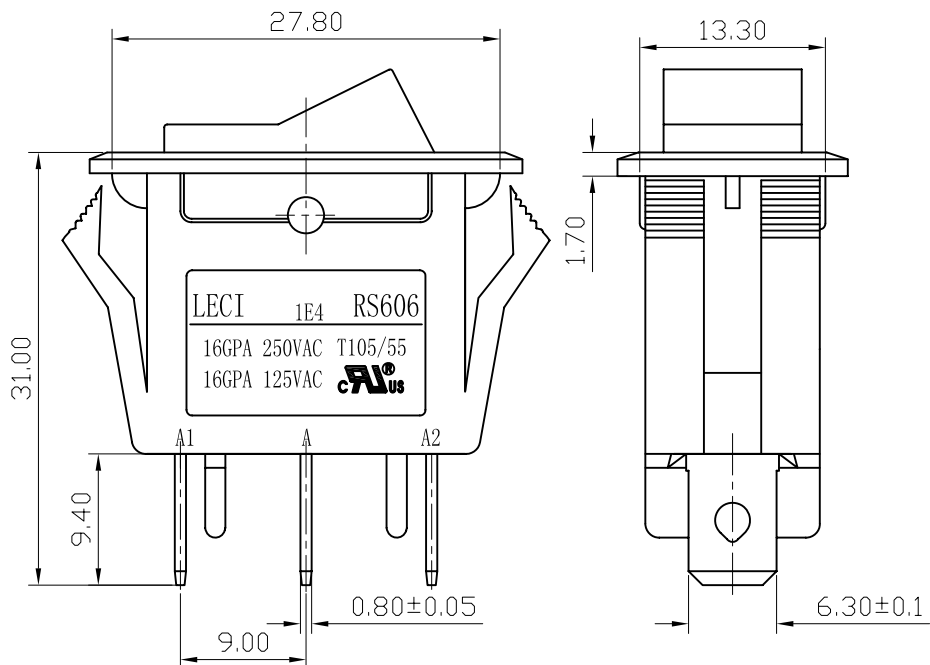


PANEL CUT-OUT		
Z	Y	X
0.70~1.25	13.50~13.70	28.9~29.1
1.25~2.00	13.50~13.70	29.1~29.2
2.00~3.00	13.50~13.70	29.2~29.3

NOTES:

1.Rating:

KC 16(4)A 250V AC T85/55

VDE ENEC 16(4)A 250V AC T85/55

CQC 16(4)A 250V AC T105/55

UL cUL 16GPA 125V AC/16GPA 250V AC T105/55

2.Circuit Diagram:3P ON-OFF

3.Terminal Strength:≥80N


4.Electrical life:≥10000 cycles

5.Withstand Voltage:Withstand Voltage:1500VAC 1min
Terminals to Button:3000VAC 1min
Leakage Current:1mA

6.Current resistance:≤50mΩ(initial)

7.Insulation resistance:≥100MΩ

8.Body Materil:NYLON 66 94V-0~2



A4				普通公差:		深圳市华灿天禄电子有限公司							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	跷板开关	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	周 金 勇	核 对 CHECKED BY	吴路方	型 号 MODEL NO.	RS606		
				ABOVE 30	±0.50								
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期 DATE	2016.01.07	核 准 APPROVAL BY	周 培 雷	图 号 DWG NO.	RS606A-101N012BRB		