

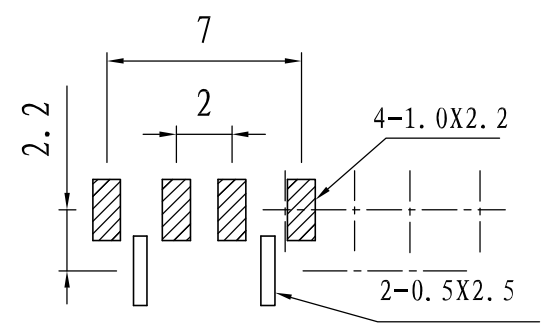
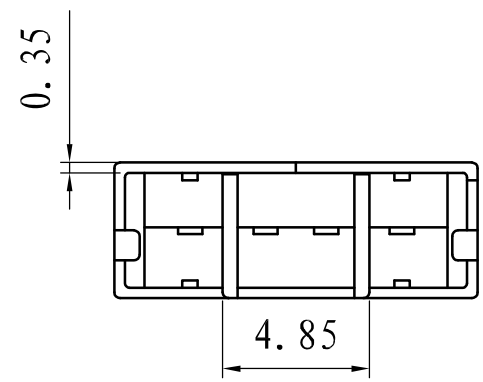
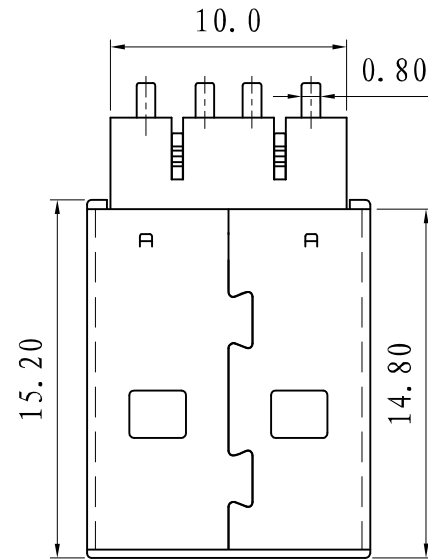


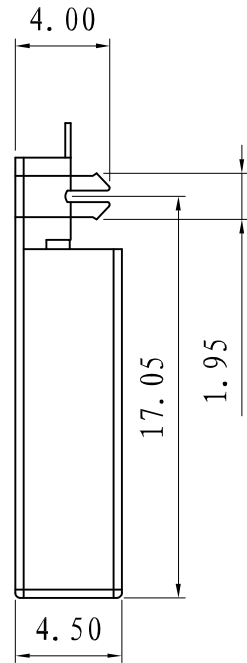

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

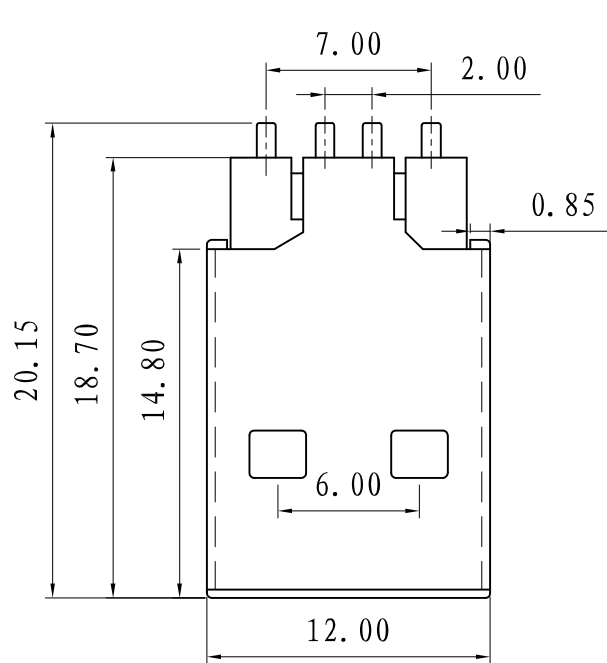

PCB. LAYOUT

说明:

电气性能:  
 接触阻抗: 30 毫欧 (最大)  
 绝缘阻抗: 1000 兆欧 (最小)  
 耐高压: 500V AC 一分钟

材料:

胶芯: PBT/LCP  
 端子: 黄铜C2680  
 外壳: SPCC

电镀:

端子: 接触区域镀金1u", 焊接区镀亮锡100-200u"  
 外壳: 全区域镀镍50-80u"

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD		
DECIMALS:	ANGLES:	TITLE	USB AM SMT 鱼叉型	
X :±0.30	X :±2°	DWN	xiong	PART NO. USB-U206-BNS
X.X :±0.20	X.X :±1°	CHKD	lee	SCALE:1:1 UNIT: mm
X.XX :±0.10		APVD	wang	SIZE: A4 SHEET:1OF 1 REV: A4
CUSTOMER COPY				