
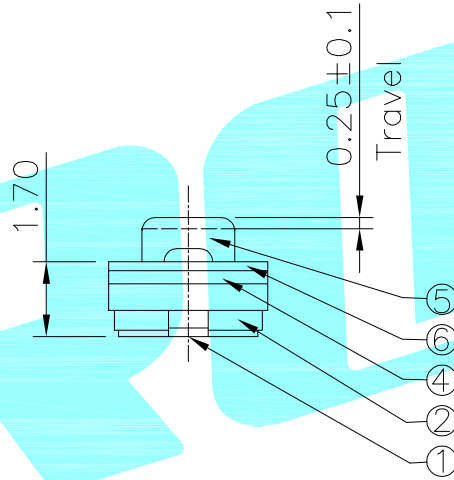


NO.1	
PART NO	vigor
3	180±30
4	250±30

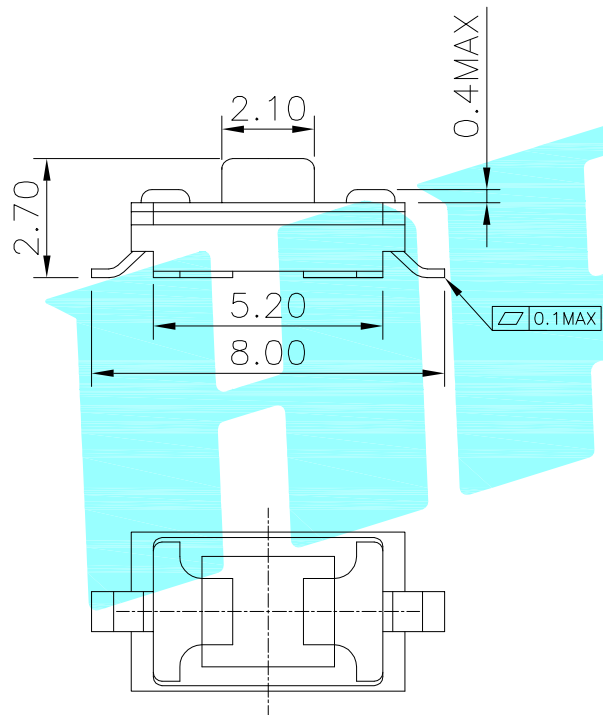

NO.2-NO.3	
PART NO	NOTE
01~99	SERIAL NUMBER

Typical Specifications

1. Rating : DC 12V 50mA
2. Contact Resistance: $\leq 100m\Omega$
3. Insulation Resistance: $\geq 100M\Omega$ DC250V
4. Operating Temperature Range:
-25°C +80°C
5. Ambient Humidity Used: $\leq 85\%RH$
6. Travel: $0.25 \pm 0.1mm$
7. Life : 100,000 Cycles
8. IP Rating: IP65

⑥	Cover	—	1	SUS	Tin Plated	—
⑤	Keystoke	—	1	RUBBE	Black	—
④	Waterproof Silicone	—	1	Silica gel	Black	—
③	Contact	—	1	F.Ag/SUS	Plating silver	—
②	Base	—	1	PA6T	Black	—
①	Terminal	—	2	Copper(0.2t)	Plating silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	HROE® ELECTRONICS CO.,LTD					
DRAWN	J.X.Zhang	2014/6/13	TITLE:	TACT SWITCHS				
CHECKED			PART NO.	K2-1107SP-A□SW-□□				
APPROVALS			TOLERANCES ARE	30~以上 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE	±2'		
			UNIT: mm	SCALE: 1:1	PROJ:	①		
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—