



Typical Specifications
 1. Rating : DC 12V 50mA
 2. Contact Resistance: $\leq 100m\Omega$
 3. Insulation Resistance: $\geq 100m\Omega$
 4. Operating Force: $160\pm 30gf$
 5. Travel: $0.20\pm 0.1mm$
 6. Life : 50,000 Cycles

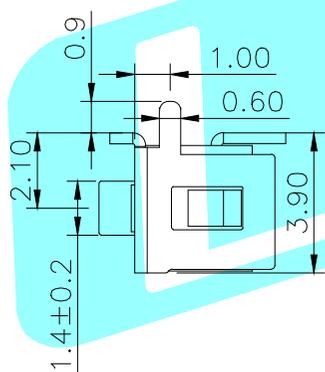


PCB Layout (Pattern side)

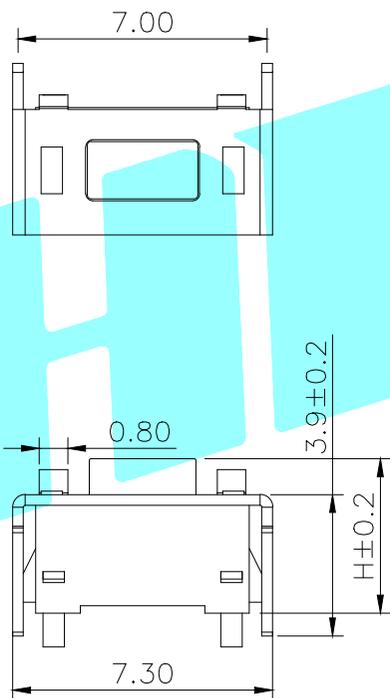

NO.1	
PART NO	H
A	4.3
B	4.5
C	5.0
E	6.0
G	7.0
I	8.0

NO.2-NO.3	
PART NO	NOTE
01~99	SERIAL NUMBER



Circuit Diagram

⑤	Cover	—	1	SUS	—	—
④	Keystoke	—	1	PPA	Black	—
③	Contact	—	1	F.Ag/SUS	Plating silver	—
②	Base	—	1	PPA	Black	—
①	Terminal	—	2	Brass(0.3t)	Plating silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	HRO 韓榮 ELECTRONICS CO.,LTD			
DRAWN	LIUCAN	2021.9.28	TITLE:	TACT SWITCHS		
CHECKED			PART NO.	K2-1101SP-□3SW-□□		
APPROVALS			UNIT: mm	SCALE: 1:1	PROJ:	
TOLERANCES ARE		30~以上 10~30 5~10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2'	DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			